E36GC75ESS designer series

6 Sealed Burners

Yes

Yes

Yes

3

6



36" Gas Slide-In Cooktop Specifications

- Product Weight 105 Lbs.
- Voltage Rating -120V/1.2W/60 Hz/0.1 Amp
- · Always consult local and /or national electric and gas codes.
- · Cooktop ships with 3/4" factory regulator. (LP conversion kit supplied).
- Respect critical dimensions as noted for proper installation of cooktop.
- · Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- The absolute minimum horizontal distance between overhead cabinets installed to either side of the appliance must be no less than the maximum width of the appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper
- Allow 1" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 7" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- It is recommended that drawers not be used beneath cooktop.
- · To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 7" beyond bottom of cabinets.
- When replacing an existing cooktop with countertop cutout deeper than 7-1/4" and less than 8-1/2", order free Depth Adjustment Filler Kit (903051-9010).

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com

Six Burners, Interlocking Grates

Designed for cooking multiple dishes at varying temperatures on a single cooktop. Interlocking grates spread weight over a broad area providing an ultrastable cook surface.

Gas-Thru-Glass Cooktop

Remove the grates to reveal the smooth, flat ceramic glass surface that now makes cleanup easier in this traditionally difficult area of the cooktop.

Beveled Front Controls

Ergonomically designed for visibility and comfort. Large, professional-style knobs are clearly scaled to eliminate guesswork while cooking. Optional black knobs available

Included Accessories Griddle

Heavy-duty, cast iron for durability and easy cleaning, it is ideal for cooking numerous foods simultaneously.

Simmer Plate

Coated with a porcelain matte finish, it is used with the simmer setting to help distribute heat evenly to the bottom of your cookware.

Wok Ring

Round black matte porcelain wok ring is strong and rigid to help stabilize a cooking wok on the grate.

36" GAS SLIDE-IN COOKTOP

Configuration

FEATURES
Black Ceramic Glass Cooktop Surface
Large Professional Skirted Knobs with Bezel
Sealed Power Burner [™] – 17,000 BTU
Sealed Burner – 14,200 BTU
Sealed Burner – 12,000 BTU
Sealed Burner – 9,500 BTU
Sealed Precision Burner [™] – 5,000 BTU - 675 BTU
Linear Flow Burner Valves
Electronic Ignition
Interlocking Grates


ACCESSORIES


Griddle	Included
Vok Ring	Included
Simmer Plate	Included
" Stainless Steel Backsplash - 903048-9010	Optional
Black Control Knob Kit - 903049-9100	Optional

SPECIFICATIONS

7-1/2"
35-3/16"
23-1/8"
Right Rear
Left Rear
Included
120 V/1.2 W/ 60 Hz/0.1 Amp
Included
105 Lbs.
110 Lbs.
08908-9

NOTE: Always consult local and / or national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxusa.com.



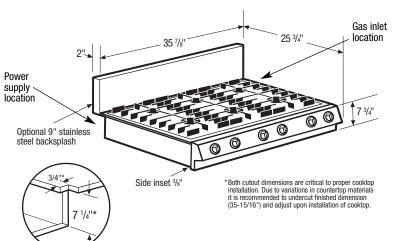

The Electrolux Group

USA • 250 Bobby Jones Expressway • Augusta, GA 30907 1-877-4electrolux (1-877-435-3287) • electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 1-800-668-4606 • electroluxca.com