



GE Appliances

GSD2600GWW/CC/BB—**GE** Nautilus™ Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)



Rough-In Installation Information (in inches)

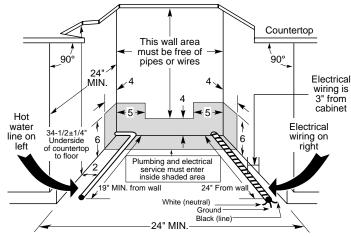


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	6.2
Calrod® heater watts	500
For use on adequately wired 120-volt, 15-an	•
circuit having 2-wire service with a separate	Э
ground wire. This appliance must be ground	ed
for safe operation.	

Wood Insert Cut-Out Dimensions (in inches)



				Panel
Models/Kits	Α	В	С	Thickness
GE Models				
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
			4-1/4" to	
GPF375 Kit	18-15/16"	23-5/8"*	3-3/4"**	3/4"

^{*}Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call


GE Answer Center® service, 800.626.2000.



^{**}Adjustment required to match adjacent cabinet fronts due to leveling leg adjustment, 4" nominal.

GE Appliances

GSD2600GWW/CC/BB—**GE** Nautilus™ Built-In Dishwasher

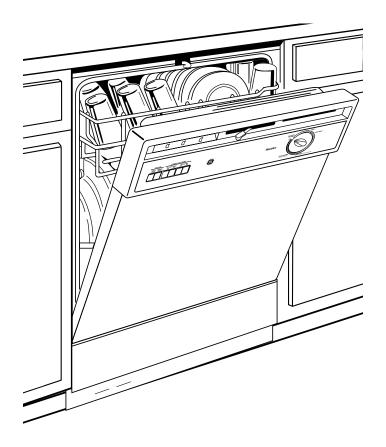

Features and Benefits

- Hard Food Disposer
- Turn-to-Start Controls with Pushbuttons
- Five Cycle Selections: Heavy Wash, Normal Wash, Light Wash, Plate Warmer and Rinse Only
- 22 Options: Heated Dry, Hi-Temp Wash and HotStart™
- Deluxe Lower Rack
- Deluxe Silverware Basket
- Rinse Aid Dispenser
- QuietPower[™] Motor
- QuietDesign™ Sound Insulation Package
- Trimless Appearance
- GSD2600GWW White on white
- GSD2600GCC Bisque on bisque
- GSD2600GBB Black on black