
Product and Cut-out Dimensions G2000 Series Dishwashers



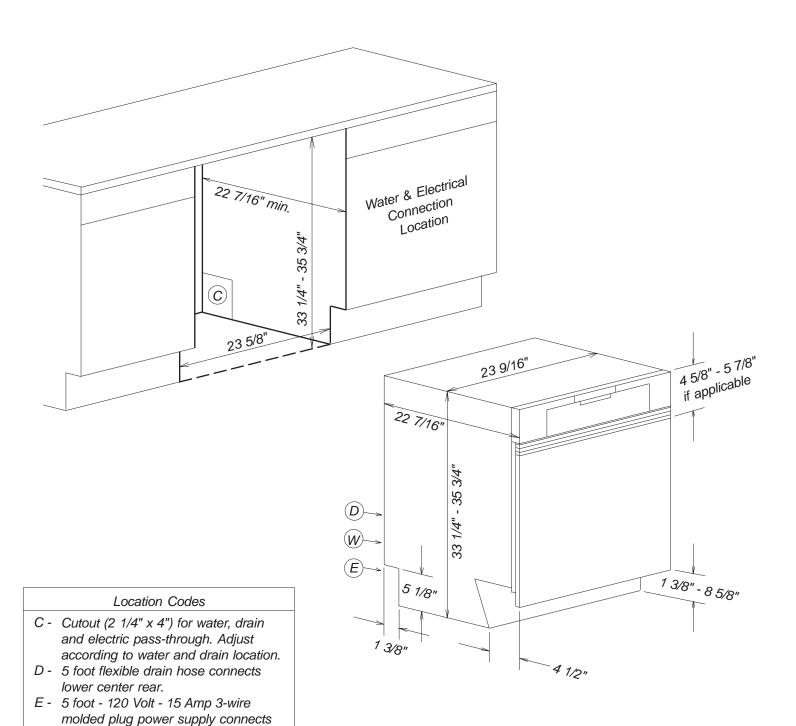

Notes

W - 5 foot "Double Waterproof" flexible water intake hose connects lower

 All installations must be done in accordance with local codes

lower left rear.

center rear.


Front Panel Information G2000 Integrated Models



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

Panel size is determined in the following manner:

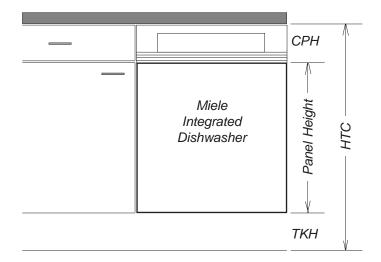

Width: 23 7/16" in all cases

Thickness: 3/4" in all cases

Height: Determined using the following calculation:

Panel Height = HTC - CPH - TKH

HTC = Height to the underside of countertop

CPH = Control panel height (Note 1)

TKH = Toe-kick height

Note 1: Control Panel Height is determined by the height of the drawers in the cabinets. This height is adjustable between 4 5/8" and 5 7/8" with spacer strips provided.

Maximum panel height: 27 1/4"
Minimum panel height: 21 1/4"


Maximum panel weight:

White / Black 23 Pounds Stainless Steel 19 Pounds

GDU Kit Installations

In lieu of a custom front, Miele offers a decorative panel system called a GDU kit. GDU kits vary depending upon the model chosen. Each GDU kit contains a front panel and a toe-kick cover.

GDU 60/65-1





This GDU accepts a custom insert:

Height: 25 11/16" Width: 23 1/8" Thick: 1/8"

Installation Information G2000 Dishwashers






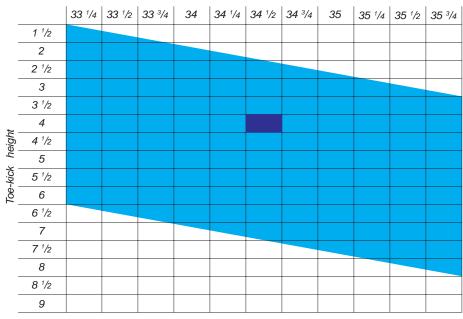

Acceptable combinations
Typical American installation

Water Connection

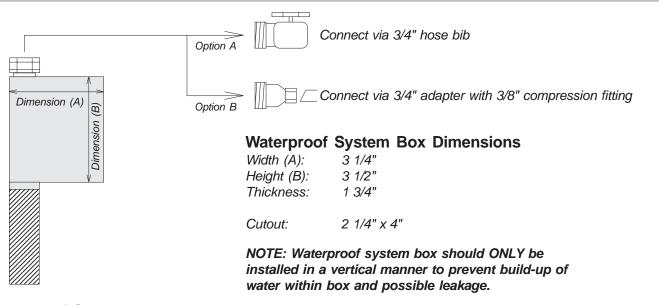

Waterproof System

Temperature: 110° - 130° F
Pressure: 4.5 - 145 PSI
Drain hose: 7/8" ID - 5 feet long