
HOTPOINT

VLSR1090G— Hotpoint 3.2 Cu. Ft. Super Capacity Washer

Washer Dimensions (in inches)

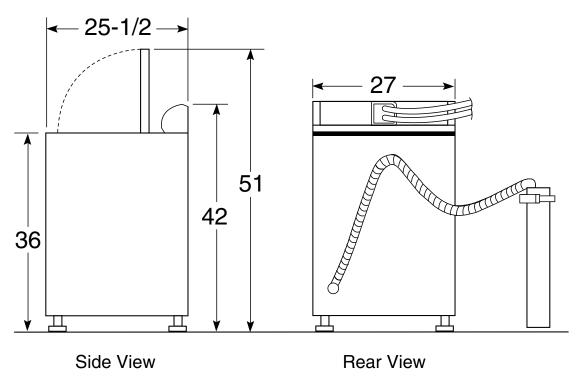

Circuit Requirements: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

Electrical Rating: 115V, 60Hz, 10 Amps


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Washer Note: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.



HOTPOINT

VLSR1090G – Hotpoint 3.2 Cu. Ft. Super Capacity Washer

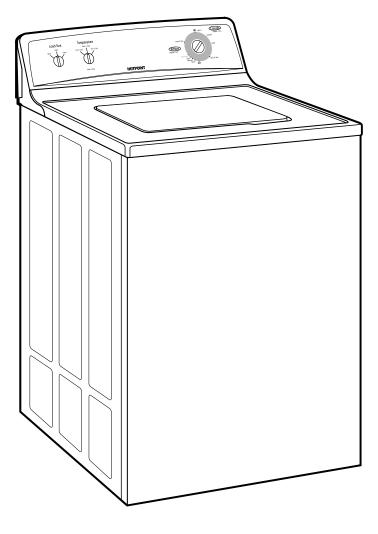

Features and Benefits

- 3.2 Cu. Ft. Super PermaTuf® II Wash Basket Designed to maintain a long-lasting stain-free appearance with bright white interior
- One Wash/Spin Speed Combinations Matches wash action to fabric type for better cleaning and clothes care results
- Nine Wash Cycles Convenient settings for everyday fabrics
- Three Wash/Rinse Temperatures Offer better wash results and longer fabric life
- Three Water Levels Minimize water waste
- FlexCare[™] Agitator Provides gentle, yet effective washing action
- Rotary Electromechanical Controls Allow fast, easy cycle selection
- Spin Only "Spin-dries" wet clothes like beach towels and swimsuits
- Quiet-By-Design[™] Engineered for guiet operation
- Model VLSR1090GWW White on white