


Dimensions (Side-By-Side)

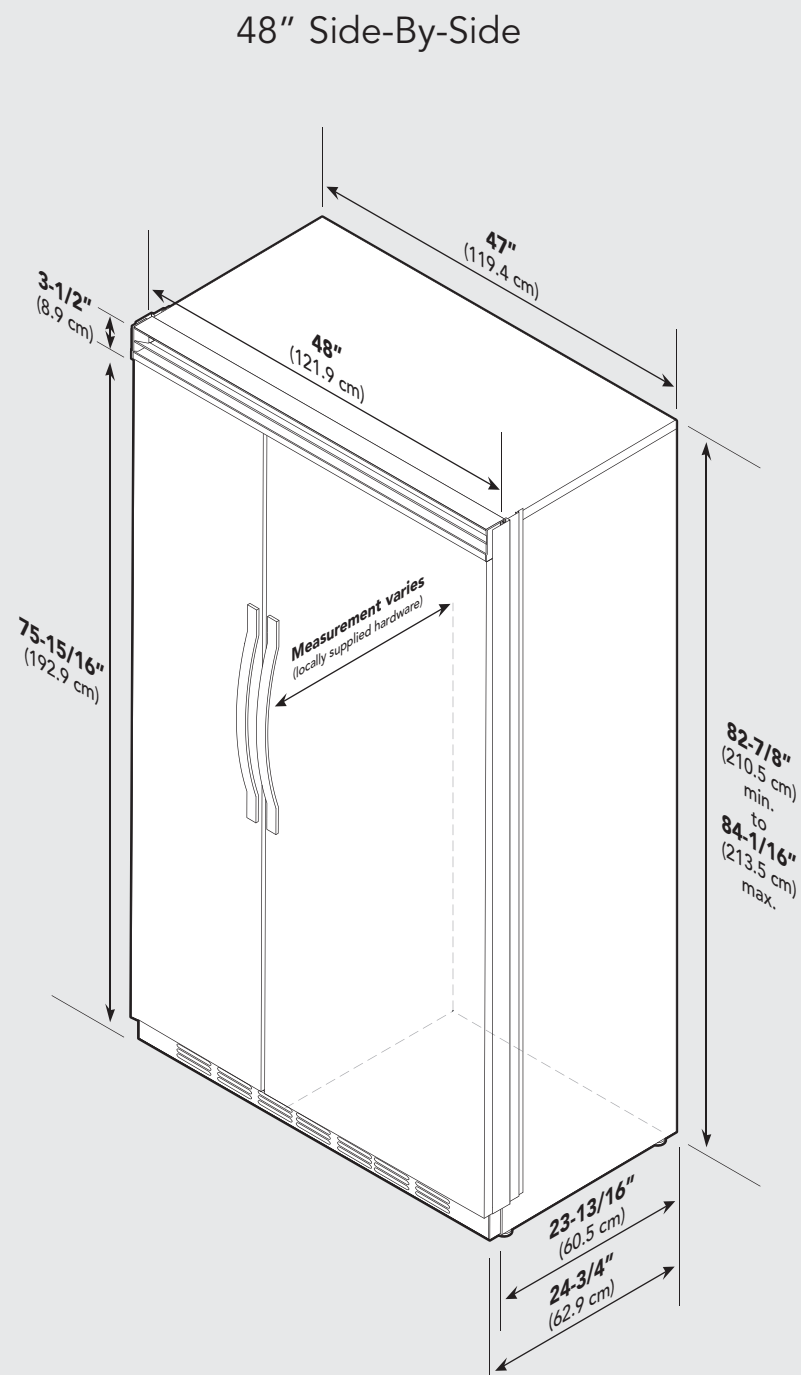


Specifications (Side-By-Side)

42" Side-By-Side		
Description	DFSB423	DFSB423D
Overall width	42" (106.7 cm)	
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall depth (from rear)	To front edge of side trim:	23-13/16" (60.5 cm)
	To front of top grille:	24-3/4" (62.9 cm)
	To front edge of door trim:	24" (61.0 cm)*
Cutout width	42" (106.7 cm)	
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.	
Cutout depth	24" (61.0 cm) min.*	
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product	
Maximum amp usage	9.9 amps	
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	1/4" copper tubing inlet waterline; minimum 35 psi; maximum 120 psi
Overall interior dimensions	Refrigerator	15.0 cu. ft. (425 liters)
	Freezer	9.0 cu. ft. (255 liters)
	Total capacity	24.0 cu. ft. (680 liters)
Maximum panel weight	Fresh food 40 lbs. (18.1 kg)	Freezer 35 lbs. (15.9 kg)
Approximate shipping weight	525 lbs. (236.2 kg)	


48" Side-By-Side		
Description	DFSB483	DFSB483D
Overall width	48" (121.9 cm)	
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.	
Overall depth (from rear)	To front edge of side trim:	23-13/16" (60.5 cm)
	To front of top grille:	24-3/4" (62.9 cm)
	To front edge of door trim:	24" (61.0 cm)*
Cutout width	48" (121.9 cm)	
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.	
Cutout depth	24" (61.0 cm) min.*	
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product	
Maximum amp usage	9.9 amps	
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	1/4" copper tubing inlet waterline; minimum 35 psi; maximum 120 psi
Overall interior dimensions	Refrigerator	18.5 cu. ft. (524 liters)
	Freezer	8.9 cu. ft. (252 liters)
	Total capacity	27.4 cu. ft. (776 liters)
Maximum panel weight	Fresh food 50 lbs. (22.7 kg)	Freezer 35 lbs. (15.9 kg)
Approximate shipping weight	650 lbs. (292.5 kg)	

*Full overlay models fit flush in 25" (63.5 cm) deep cabinet openings. They can be installed in standard 24" (61.0 cm) deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.

Cutout Dimensions (Side-By-Side)

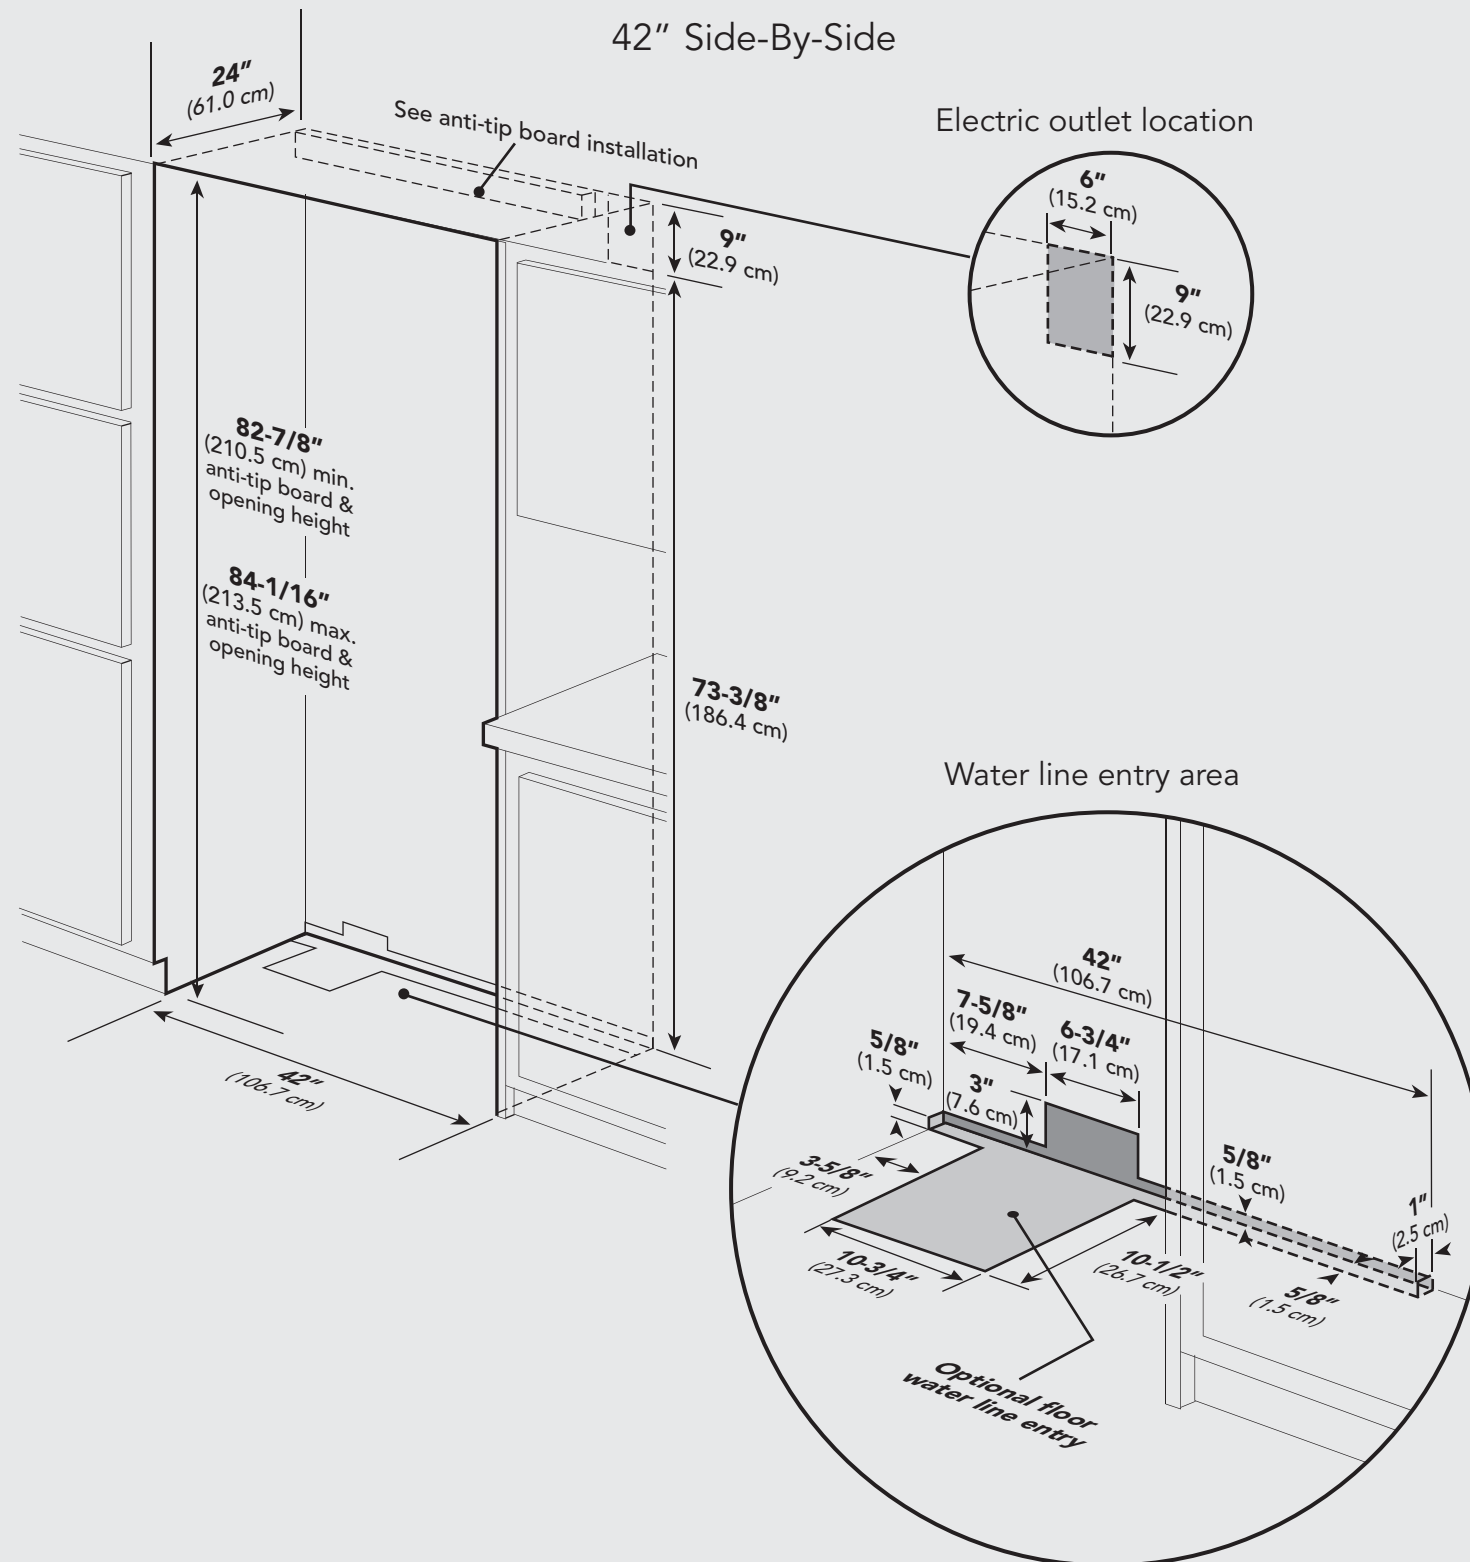


Anti-Tip Dimensions (Side-By-Side)

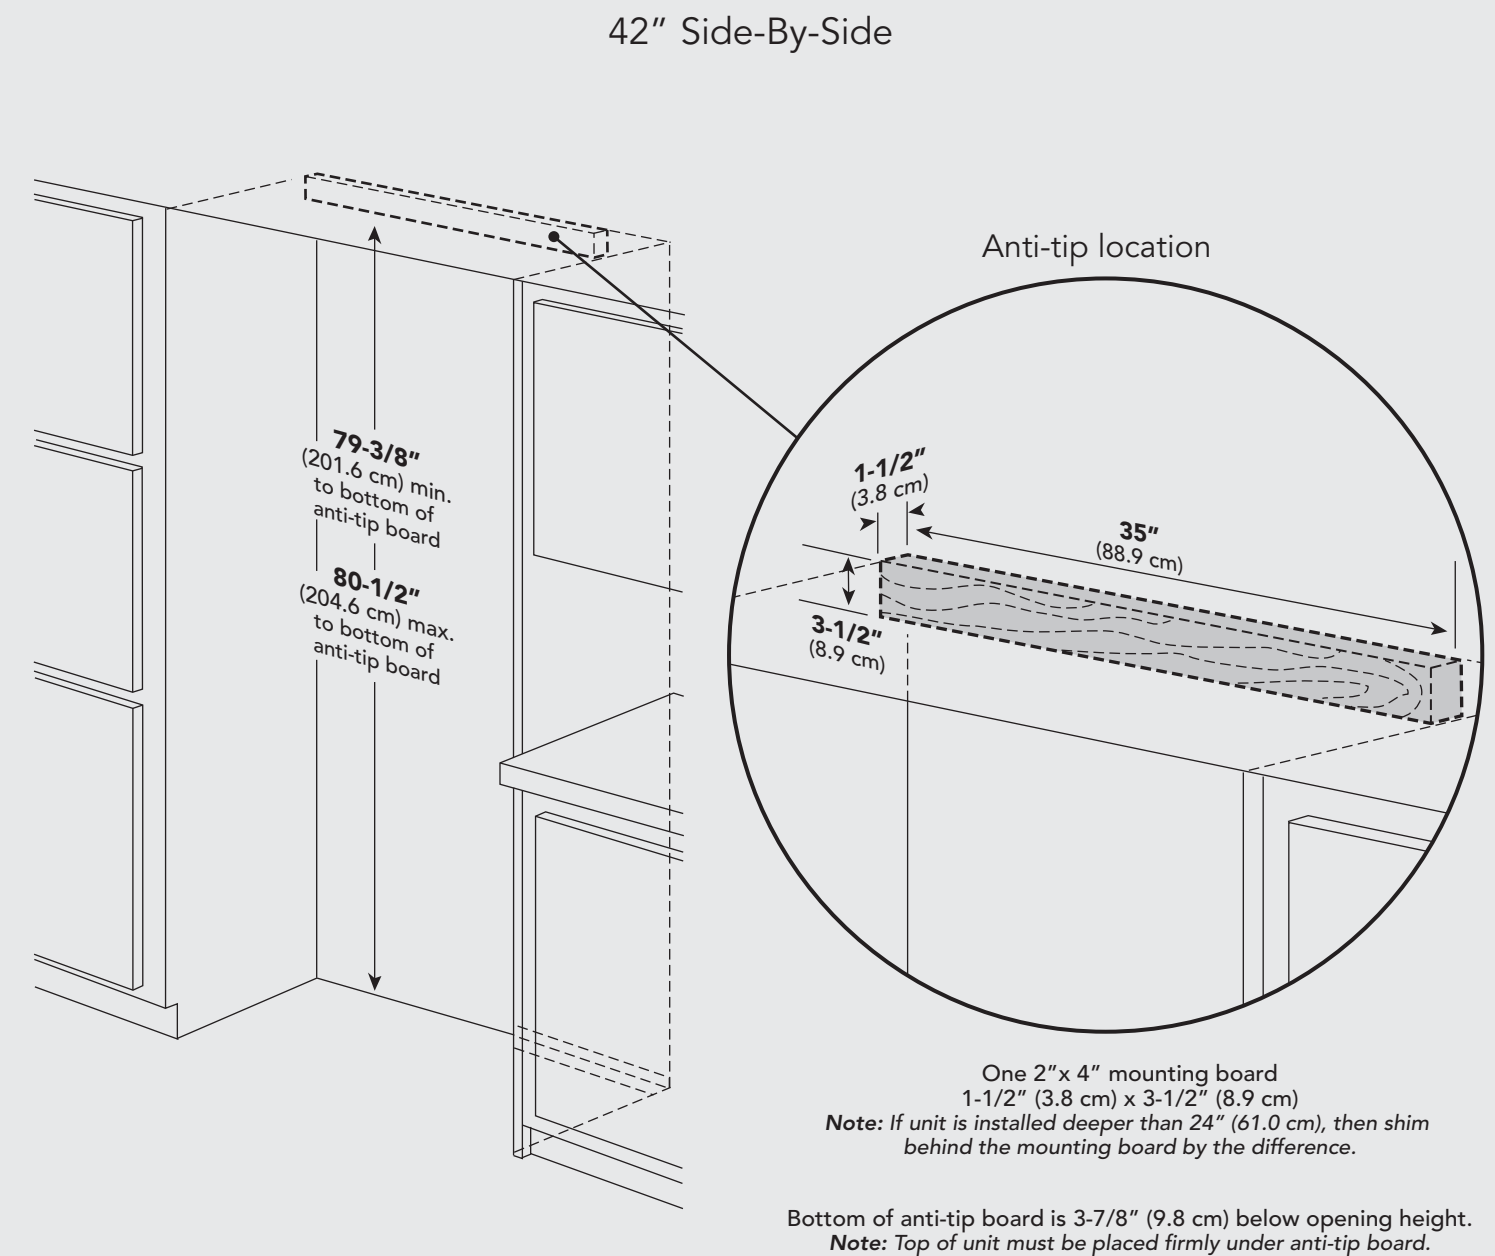


Cutout Dimensions (Side-By-Side)

48" Side-By-Side

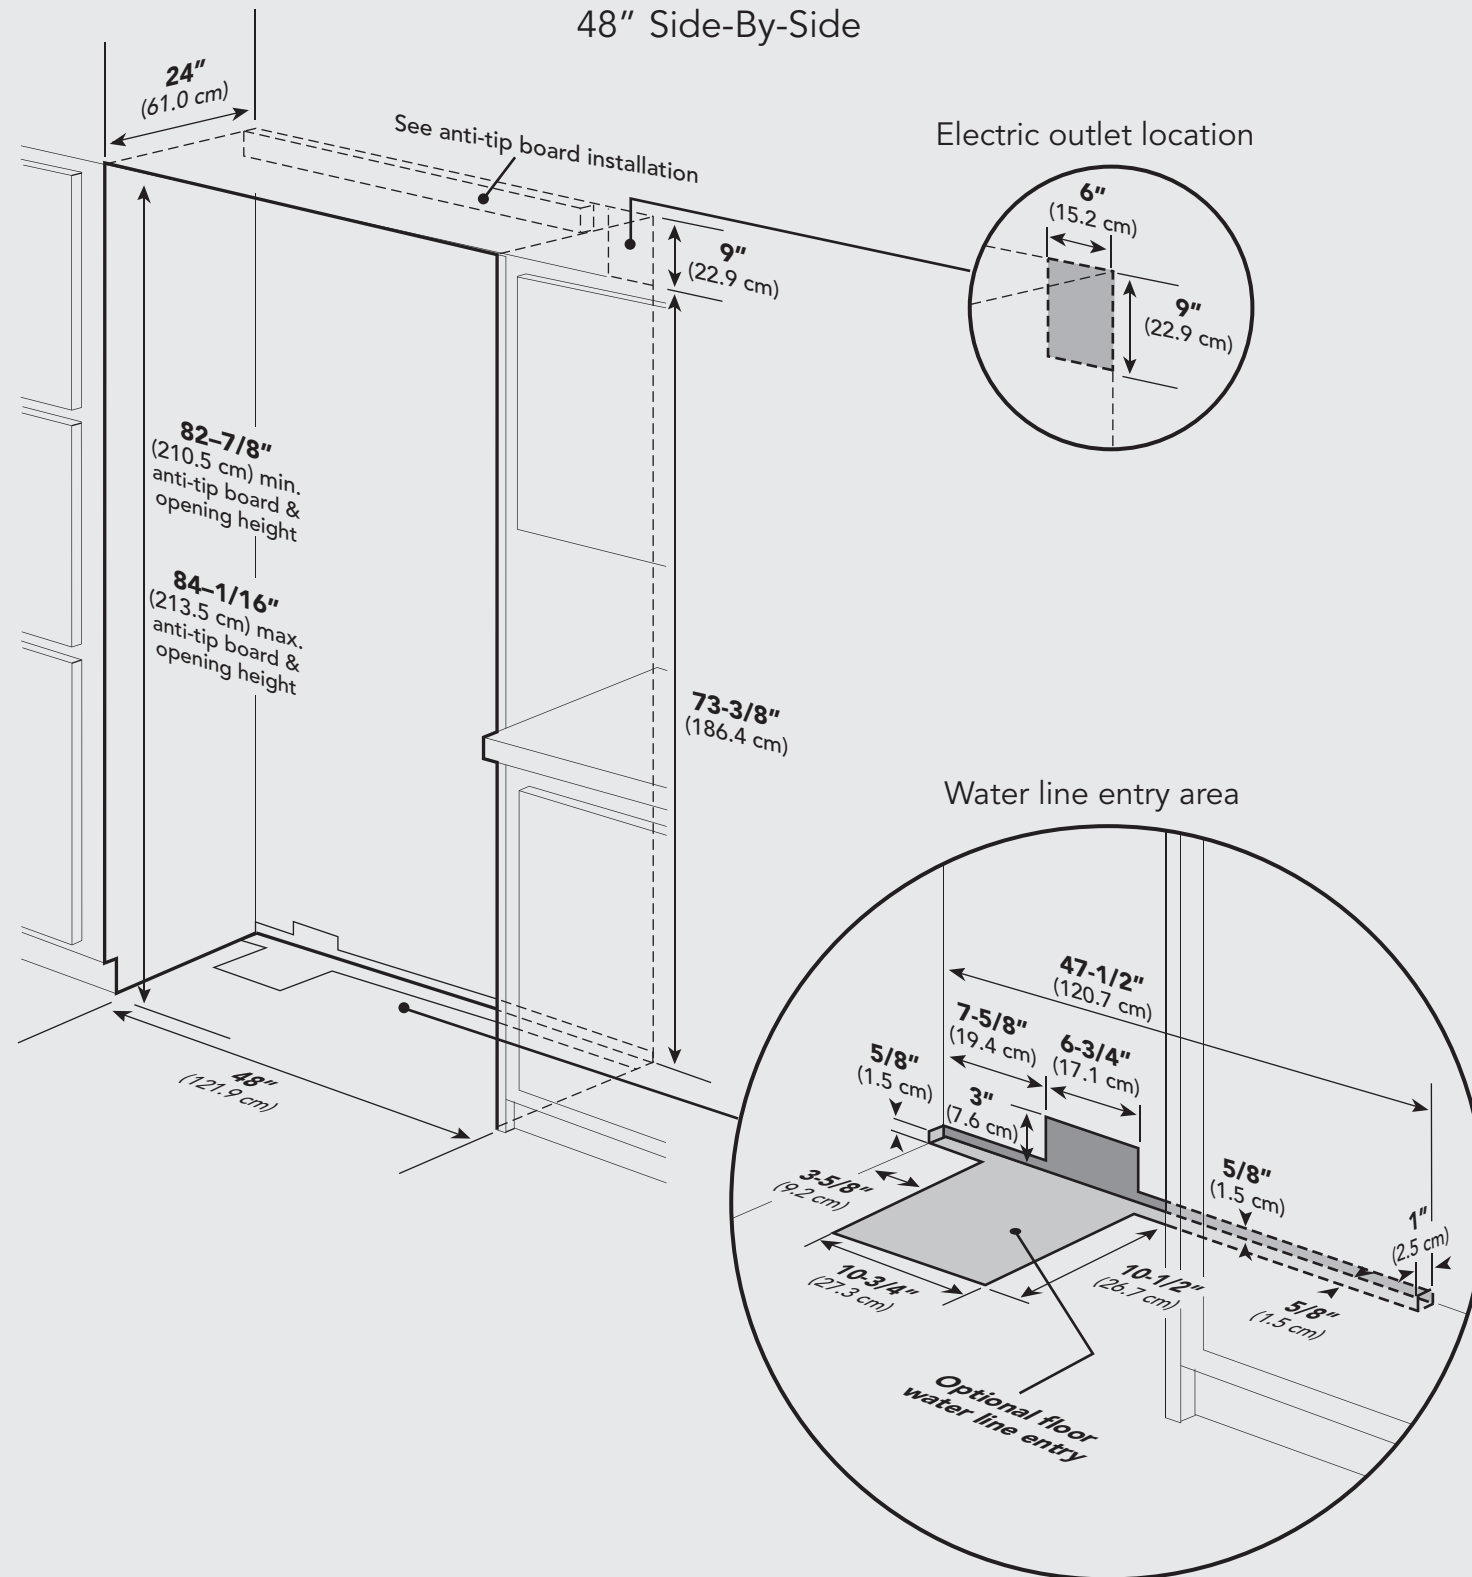


Anti-Tip Dimensions (Side-By-Side)

48" Side-By-Side

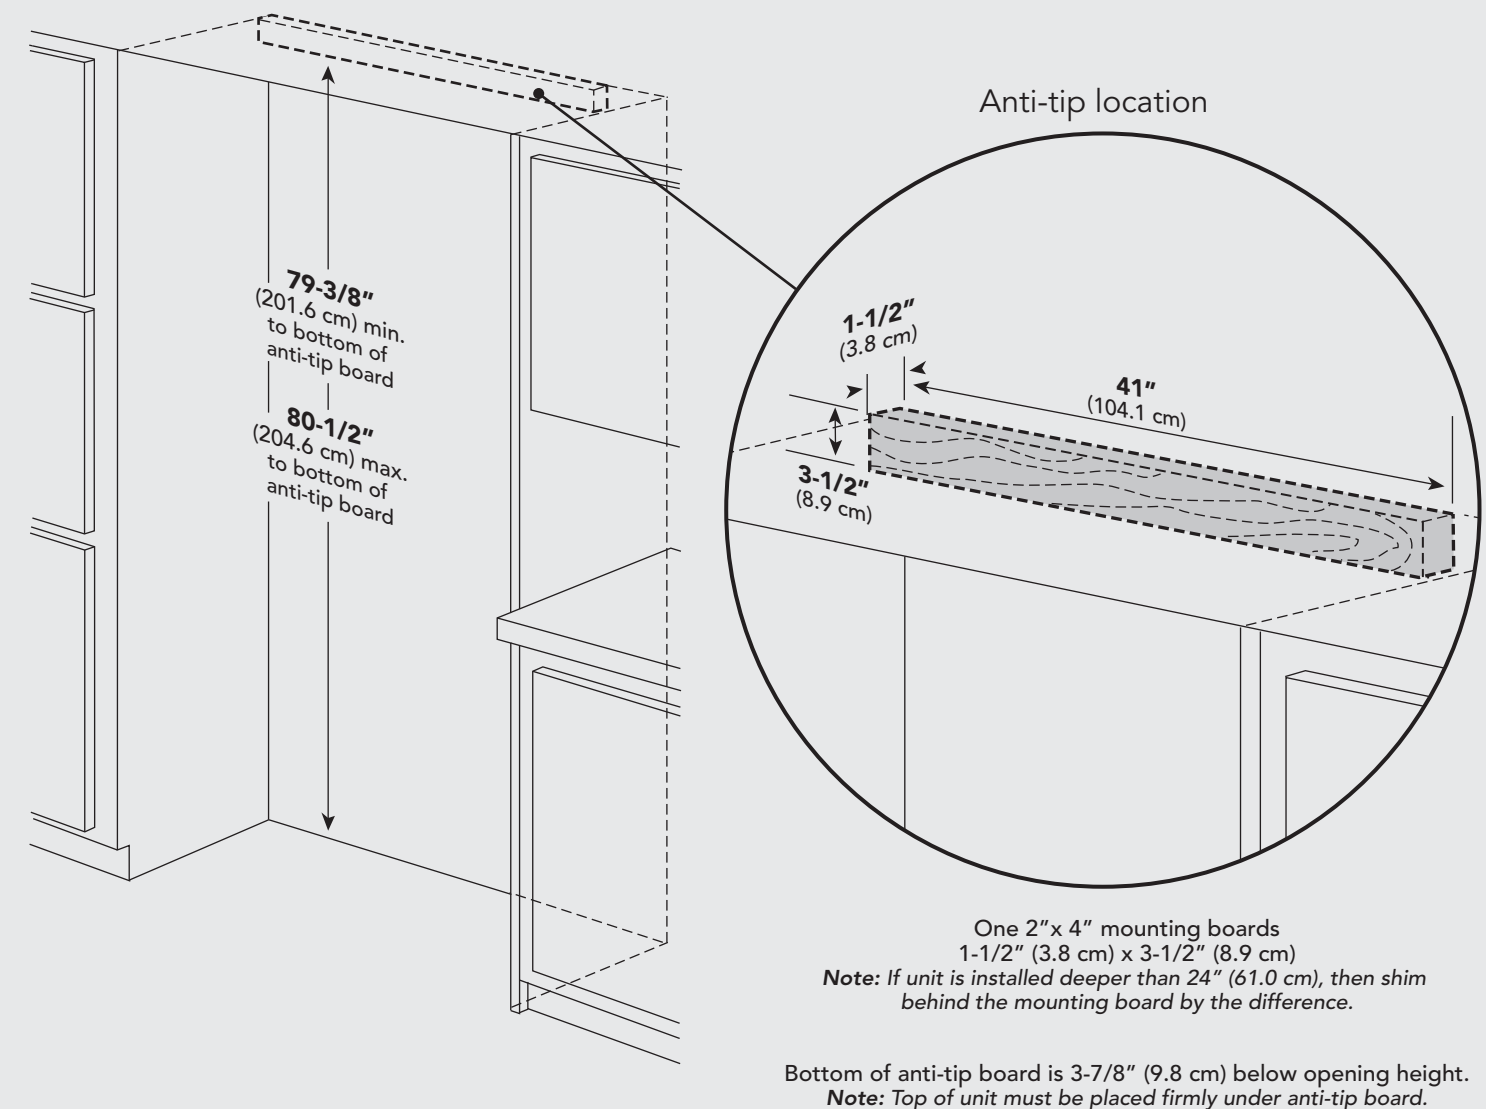

Overlay Dimensions (Side-By-Side)

42" Custom Panels

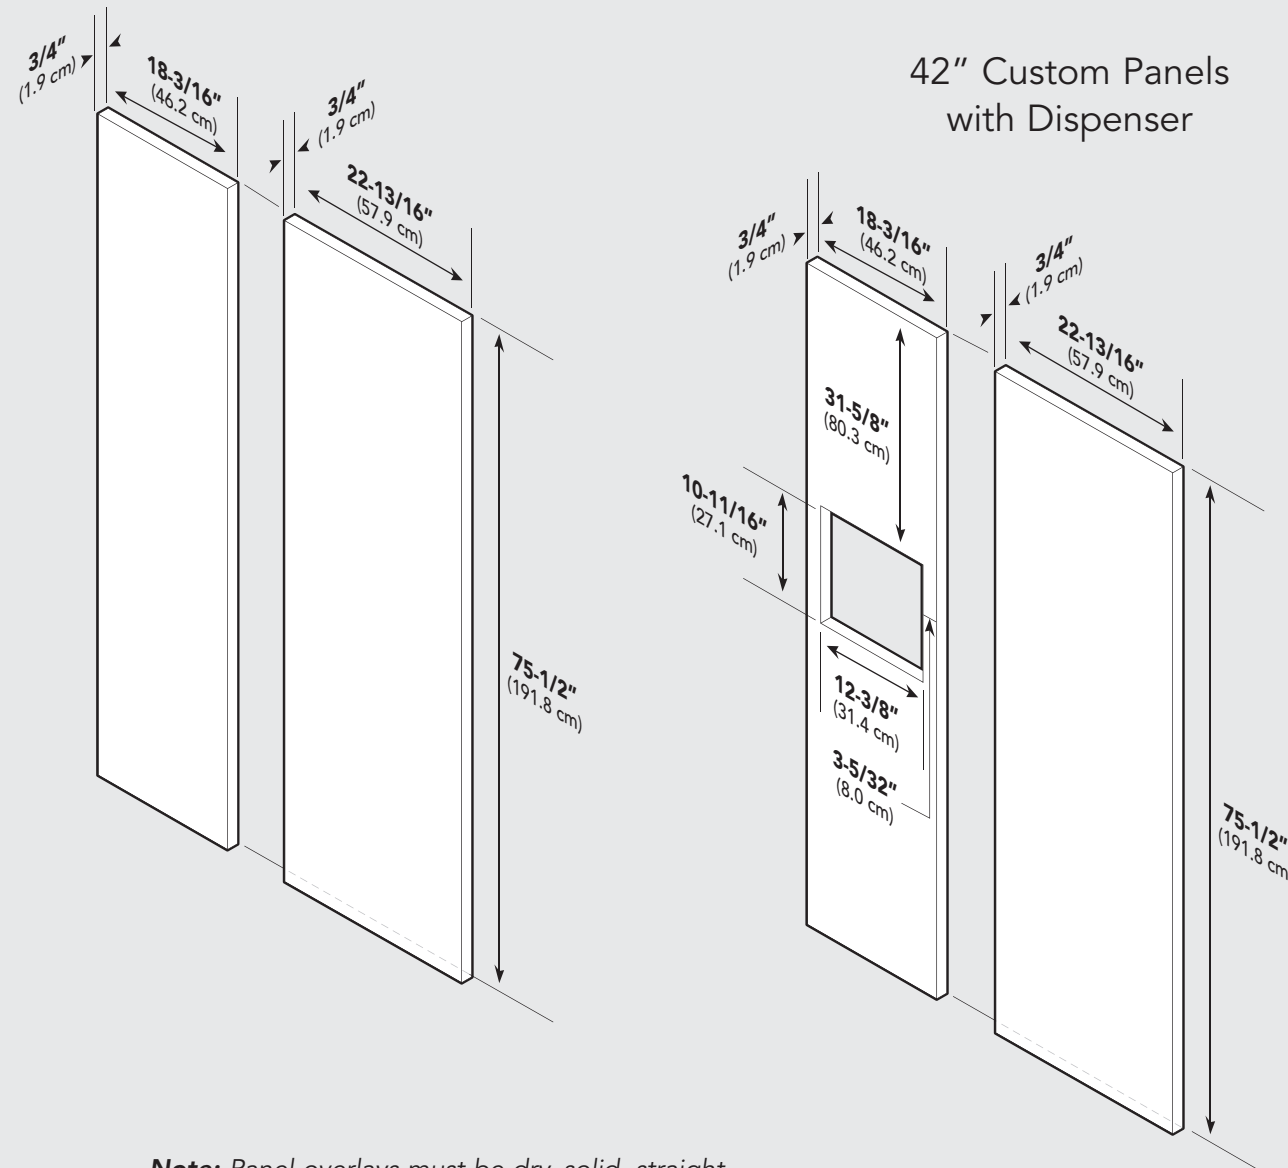


Note: Panel overlays must be dry, solid, straight one piece panels. The use of multiple panel pieces to achieve the dimensions is not recommended.

Important: A $\frac{1}{4}"$ thick back panel is required. Make it $\frac{1}{4}"$ smaller than the dimensions shown. Locate it to achieve a $\frac{1}{8}"$ inset on all sides.

Overlay Dimensions (Side-By-Side)

48" Custom Panels

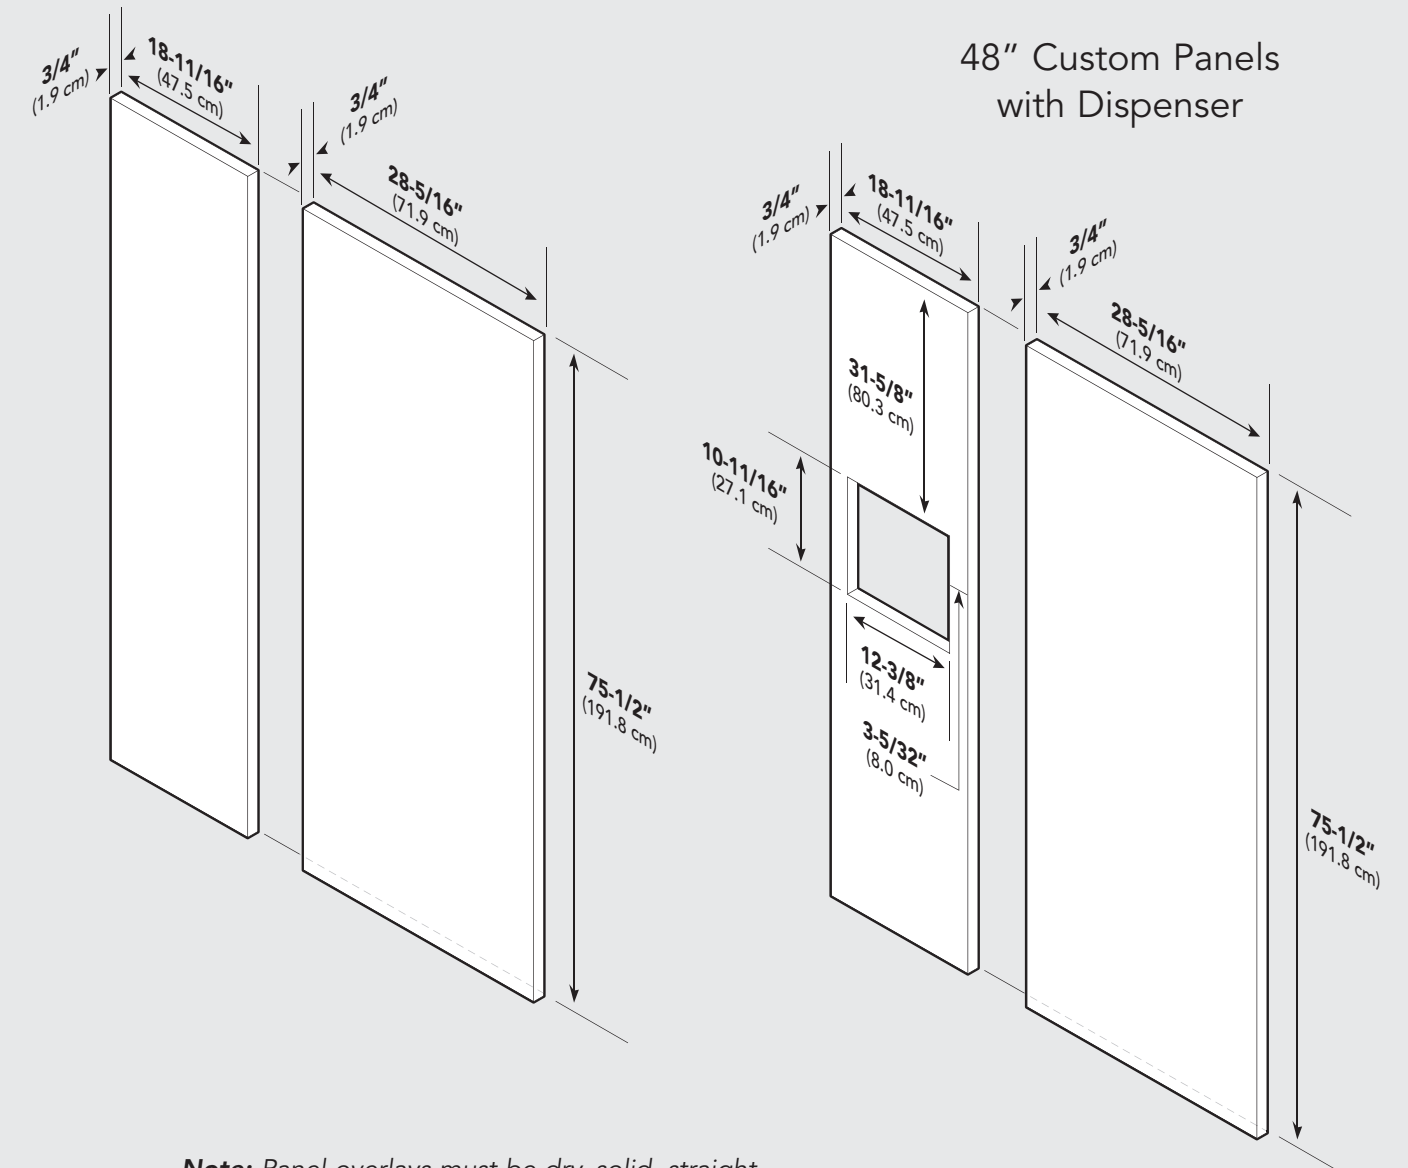


Note: Panel overlays must be dry, solid, straight one piece panels. The use of multiple panel pieces to achieve the dimensions is not recommended.

Important: A $\frac{1}{4}"$ thick back panel is required. Make it $\frac{1}{4}"$ smaller than the dimensions shown. Locate it to achieve a $\frac{1}{8}"$ inset on all sides.

Custom Grille Dimensions (Side-By-Side)

42" Custom Grille

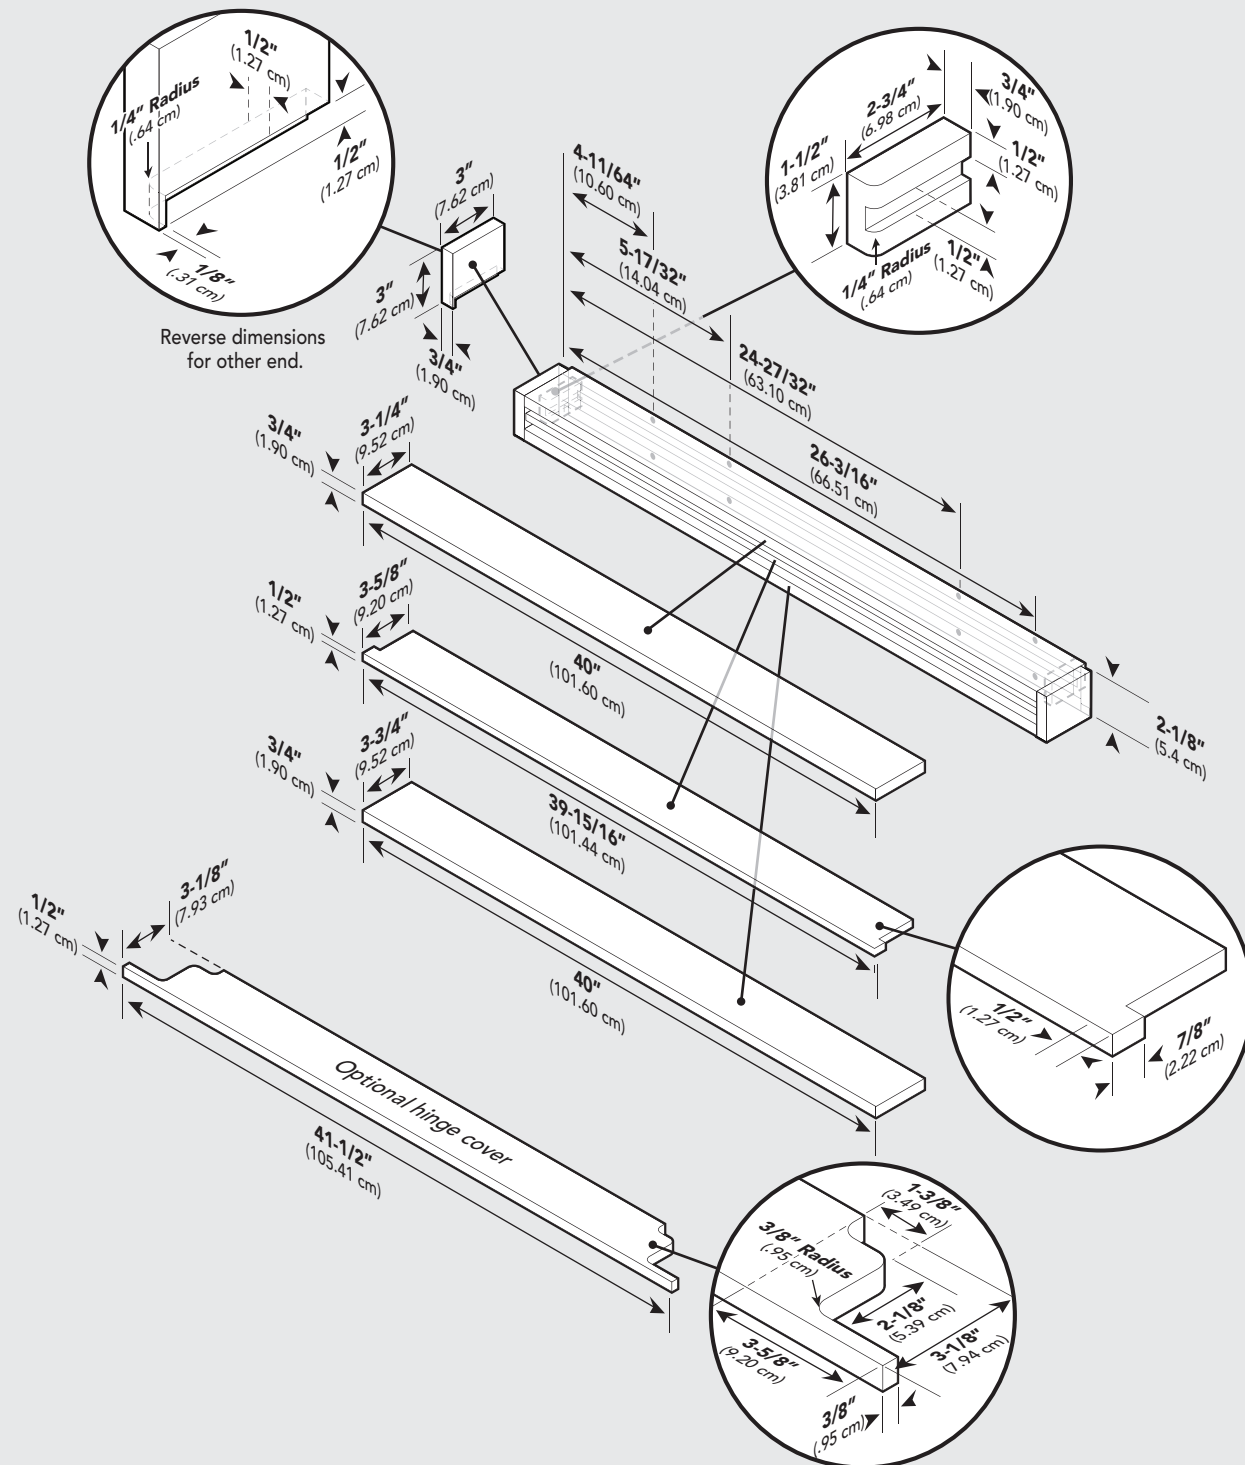

Custom Grille Dimensions (Side-By-Side)

48" Custom Grille

