


## PRODUCT MODEL NUMBERS

GEQ8811KQ	GEW9868KL
GEQ8811KT	GEW9868KQ
GEQ8858KQ	GEW9868KT
GEQ8858KT	

**Electrical:** A four-wire or three-wire, single phase, 120/240-volt, 60-Hz, AC-only, electrical supply (or four-wire or three-wire, 120/208-volt if specified on model/serial rating plate) is required on a separate 30-ampere circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended.

**Exhaust venting:** Exhaust your dryer to the outside. four-inch diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do Not use plastic or metal foil vent. Exhaust outlet hood must be at least 12 inches from the ground or any object that may be in the path of the exhaust.

## OVERALL DIMENSIONS

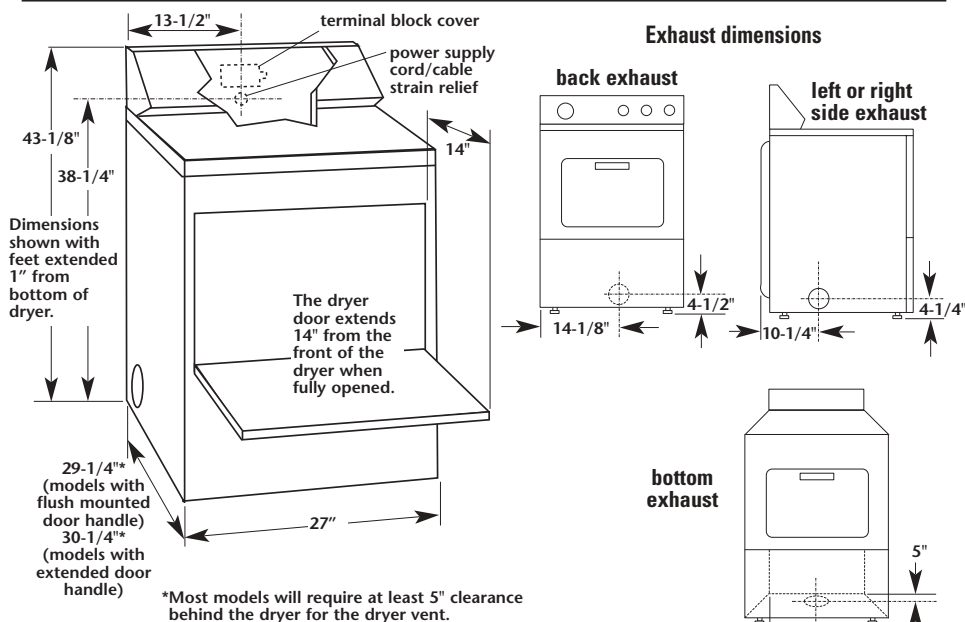


## RECESSED AREA AND CLOSET INSTALLATION

	Recommended/Minimum			
Recessed	Back	Sides	Top	Front
Exhausted	5"/0"	1"/0"	18"/15"	—
Closet	5"/4"	1"/0"	18"/15"	1"/1"

### Closet confined area

If a closet door is installed: The minimum unobstructed air openings are required. Louvered doors with equivalent air openings are acceptable.

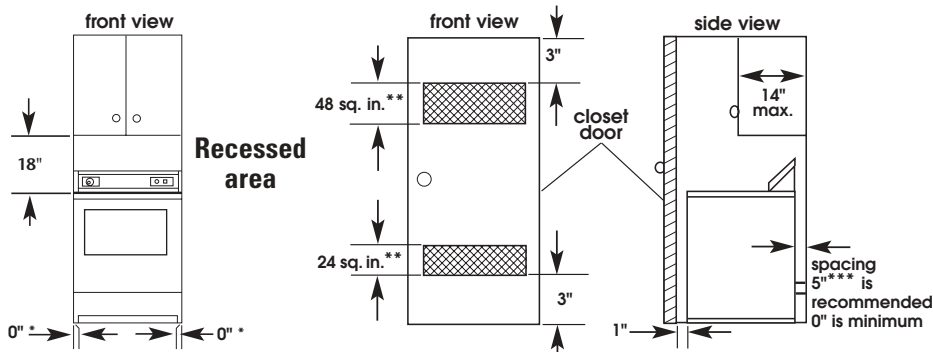


\*Wall, door and floor molding may require additional spacing.

\*\* Minimum top and bottom air openings for closet door.

\*\*\* External exhaust elbow requires additional space.


## EXHAUST VENTING

### Preferred

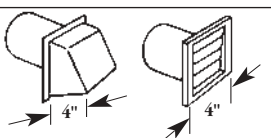

When you have a 4" hood		
	Maximum length of 4" diameter metal vent	
Number of 90° elbows	Rigid	Flexible (fully extended)
0	64 ft.	36 ft.
1	54 ft.	31 ft.
2	44 ft.	27 ft.
3	35 ft.	25 ft.
4	27 ft.	23 ft.

### Acceptable



When you have a 2-1/2" hood		
	Maximum length of 4" diameter metal vent	
Number of 90° elbows	Rigid	Flexible (fully extended)
0	58 ft.	28 ft.
1	48 ft.	23 ft.
2	38 ft.	19 ft.
3	29 ft.	17 ft.
4	21 ft.	15 ft.

Select the route that will provide the straightest and most direct path outdoors. Plan the installation to use the fewest number of elbows and turns. Avoid making 90° turns.

When using elbows or making turns, allow as much room as possible. Bend flexible metal vent gradually to avoid kinking.

### Determine vent length

1. See the exhaust vent length chart that matches your type hood for the maximum vent lengths you can use.

**Do not use vent runs longer than specified in exhaust vent length charts.**

2. Determine the number of elbows you will need.

3. In the column listing the type of metal vent you are using (rigid or flexible), find the maximum length of metal vent on the same line as the number of elbows.

**The maximum length using a 2" x 6" rectangular vent with 2 elbows and a 2-1/2" exhaust hood is 8 ft.**