## PSC23PST

# GE Profile CustomStyle™ ENERGY STAR® 22.6 Cu. Ft. Stainless Side-by-Side Refrigerator with Integrated Dispenser

### **Dimensions and Installation Information**

| Overall<br>Dimensions | Height to top of hinge (in.) A                                | 69-1/4  |
|-----------------------|---|---------|
|                       | Height to top of case (in.) <b>B</b>                          | 68-3/4  |
|                       | Case depth without door (in.) <b>C</b> <sup>†</sup>           | 23-7/8  |
|                       | Case depth less door handle (in.) <b>D</b> <sup>†</sup>       | 26-3/4  |
|                       | Case depth with door handle (in.) <b>E</b> †                  | 29-3/16 |
|                       | Depth with fresh food door open 90° (in.) ${\bf F}^{\dagger}$ | 45-9/16 |
|                       | Width (in.) <b>G</b>  | 35-3/4  |
|                       | Width with door open 90° inc. door handle (in.) <b>H</b>      | 41-5/16 |
| Air<br>Clearances     | Each side (in.)   | 1/8     |
|                       | Top (in.)   | 1       |
|                       | Back (in.)  | 1/2     |


†Water hook-up fits in back air clearance when calculating installation depth.


If installed against a wall, allow clearance of 14-3/16" on freezer side to remove bin.

Clearance required to remove fresh food full-size pan without disassembling is 18-15/16".

Allow additional space for any necessary leveling adjustments.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.





Front View

Dimension and installation information are shown in inches.










## PSC23PST

# GE Profile CustomStyle™ ENERGY STAR® 22.6 Cu. Ft. Stainless Side-by-Side Refrigerator with Integrated Dispenser

## Rough-In Dimensions and Installation Information Installation Tips to Maximize the Built-In Look

- All wall/floor molding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4" diameter water line tubing recommended.
- When possible, recess both copper water line and electrical outlet. (See local codes)
- Front and rear leveling legs are adjustable for the built-in look. (See owner's manual)
- \*The rough-in dimensions of 70-1/4"/72-1/4" are minimum and measured from the finished floor to top of opening (or the underside of the overhead cabinets) For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/2") to height of opening for 23 cu. ft. models and 1/8" (72-3/8") for 25 cu. ft. models to allow additional clearance between cabinet doors and top of refrigerator trim when cabinet doors are in open position.

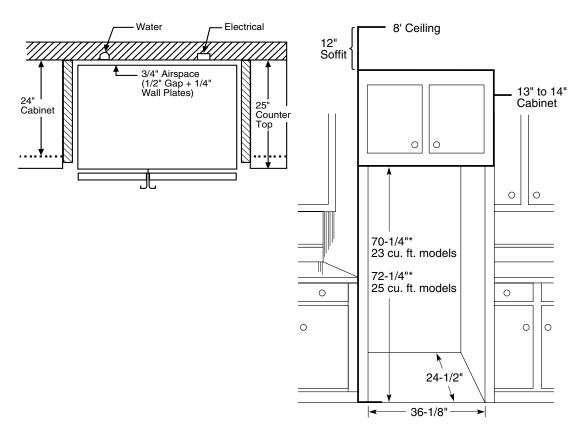

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.

Dimension and installation information are shown in inches.









## PSC23PST

# GE Profile CustomStyle™ ENERGY STAR® 22.6 Cu. Ft. Stainless Side-by-Side Refrigerator with Integrated Dispenser

## **Features and Benefits**

- CustomStyle™ Configuration Offers a built-in look without the built-in expense
- Stainless Steel Exterior Convey a look of utmost polish and sophistication
- ClimateKeeper2™ System Keeps food garden fresh longer, while protecting ice from odor transfer, with its unique dual-evaporator system
- PreciseFill technology Dispenses fresh, filtered water in accurate measurements
- Integrated dispenser with LED lighting Beveled color-matched design gives the dispenser an attractive, updated look; LED lighting provides long-lasting illumination
- Electronic Beverage Center Keeps beverages and treats icy cold and easily accessible
- CustomCool™ Technology Chills in minutes, thaws in hours and keeps foods fresher, longer
- Electronic controls with actual temperature display Eliminates guesswork in setting refrigerator temperatures
- Slide 'n Store™ Full-Extension Freezer Baskets Extends 12" to 16" beyond the cabinet, providing easy loading and unloading
- Quick Ice™ Option Makes ice up to 50% faster than normal settings-ideal for entertaining
- TurboCool™ Setting "Revs up" the refrigerator, cooling it quickly after frequent door openings
- Integrated Ice™ System Frees up valuable freezer space. It tilts down, providing easy access to bulk ice
- Tilt-Out Freezer Door Bins Move forward for convenient access
- Model PSC23PSTSS Stainless steel

