


Integrated Electric Grill Module

MODEL IG15/S



Model IG15/S

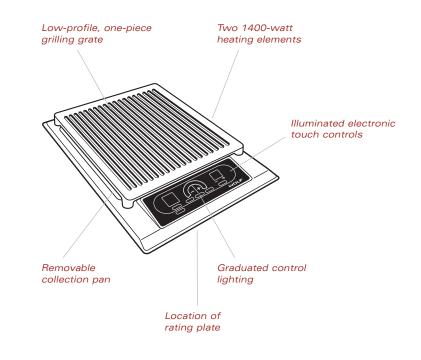

► The Wolf Model IG15/S 15" (381) integrated electric grill module is available in the classic stainless steel finish.

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org. Who says you have to sacrifice the fun of grilling when the weather changes and you cannot take advantage of the outdoors? With this grill module you can easily handle steaks and all sorts of food without the hassle of lava rocks or briquettes.

There are two 1400-watt heating elements—front and back—on this 15" (381) unit that enables you to cook on one side of the module while keeping other items at serving temperature.

For ease of cleaning, there are porcelain plates below the heating elements that accumulate any unwanted grease and drain it to the removable porcelain collection pan.


With Wolf's integrated modules, you have the ultimate in customization. You can create your own design by mixing and matching the various components within this system.

FEATURES

- Integrated design allows for installation of multiple cooktops or modules
- Stainless steel top construction with classic stainless steel finish
- Two 1400-watt, individually controlled heating elements—front and back—for even grilling
- Illuminated electronic touch controls with graduated control lighting
- Low-profile, one-piece cast iron grilling grate with matte porcelain finish

- Black porcelain-coated grease deflection plates
- Easy-to-clean, removable porcelain collection pan
- Independent digital timer
- CSA certified for US and Canada
- Two and five year residential warranty exclusions apply; warranty information can be found on our website, wolfappliance.com

OVERALL DIMENSIONS



Unit dimensions may vary by $\pm 1/8$ " (3).

Dimensions in parentheses are in millimeters unless otherwise specified.



Model IG15/S

VENTILATION OPTIONS

- 30" (762) Cooktop hood or Pro wall or wall chimney hood or liner
- ▶ 36" (914) Pro island hood

For additional information, refer to the Cooktop or Pro Ventilation sections of our website, wolfappliance.com.

ACCESSORIES

▶ Filler strip

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.


SPECIFICATION	S	•
Overall Cooktop Width		15" (381)
Overall Cooktop Height		6 ¹ /4" (159)
Overall Cooktop Depth		21" (533)
Two Heating Elements		1400 W each
Total Element Power		2800 W
Minimum Cabinet Depth		22 ³ /4" (578)
Minimum Height Clearance		6 ¹ /4" (159)
Cooktop Cut-Out Width		14" (356)
Cooktop Cut-Out Depth		19 ¹ /4" (489)
Electrical Supply Requirements		240/208 V AC, 60 Hz 15 amp circuit
Conduit		4 ft (1.2 m) flexible 3-wire
Electrical Rating		2.8 kW at 240 V 2.1 kW at 208 V
Shipping Weight		50 lbs (28 kg)
Special Note N		be installed in combination other cooktops or modules

Specifications are subject to change without notice.

INSTALLATION SPECIFICATIONS

13" max 33" (838) RECOMMENDED 30" (762) COUNTERTOP TO COMBUSTIBLE (330) CABINET WIDTH 7"* min (178) CUT-OUT TO 18" CUT-OUT TO COMBUSTIBLE ← MATERIALS → | ← WIDTH → | (457) 19¹/4" (489) 2" MATERIALS (51) COOKTOP CUT-OUT 2¹/2" min ABOVE COOKTOP DEPTH - (64) (BOTH SIDES) 6¹/4" (159) 36" (914) E 15" STANDARD (381) FLOOR TO COUNTERTOP HEIGHT 15" (381)

NOTE: Application shown allows for installation of two 15" (381) modules side-by-side with 33" (838) recommended cabinet width. 18" (457) recommended cabinet width for installation of single 15" (381) cooktop or module. *Minimum clearance from both side edges of cooktop cut-out to combustible materials up to 18" (457) above countertop. **Minimum clearance from rear edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.



DIMENSIONS	▼
Minimum Cabinet Depth	22 ³ /4" (578)
Cooktop Cut-Out Width	14" (356)
Cooktop Cut-Out Depth	19 ¹ /4" (489)
Location of Electrical	Within shaded area

See Installation Instructions shipped with unit for detailed specifications.

INSTALLATION NOTES

► Refer to the illustrations and specifications for overall dimensions, cut-out dimensions and installation specifics.

▶ Wolf recommends using 33" (838) wide cabinets for installation of two integrated modules side by side. An 18" (457) wide cabinet is recommended for installation of a single integrated cooktop module.

IMPORTANT NOTE: Review specific installation instructions for product to product capabilities

▶ When multiple cooktops or modules are installed side by side, refer to the countertop cut-out dimensions on page 6.

► A Wolf Cooktop or Pro ventilation hood is recommended. When installing a ventilation hood, refer to the specific requirements of the hood for the minimum dimension to countertop. Also refer to the ventilation recommendation charts in the cooktop or Pro ventilation sections of our website, wolfappliance.com.

IMPORTANT NOTE: Wolf does not recommend the use of downdraft ventilation with the integrated grill module.

► The Wolf integrated grill module requires a separate, grounded 3-wire 240/208 V AC, 60 Hz, 15 amp service with its own circuit breaker. It has a 4' (1.2 m) flexible 3-wire conduit for connection at the electrical supply. Locate electrical within the shaded area shown in the illustration on page 4.

► You must follow all National Electrical Code regulations. In addition, be aware of local codes and ordinances when installing your service.

 Refer to the installation instructions shipped with each Wolf product for detailed specifications.

A WARNING

This cooktop is intended for indoor use only.


MULTIPLE COOKTOP INSTALLATION

With Wolf's integrated modules, you have the ultimate in customization. You can create your own design by mixing and matching the various components within this system. And when you couple these modules with other cooktops within the Wolf inventory you and your client will truly understand freedom of choice.

Some Wolf integrated modules can be installed together or with a 30" (762) or 36" (914) cooktop. When multiple units are installed side by side, the cut-out dimensions that are shown in the illustration are derived by adding 1¹/4" (32) additional space for each additional unit, to give you your total cut-out width. Refer to the illustration below for countertop cut-out dimensions for installation of multiple cooktop units.

When two or more cooktops or modules are installed together, an accessory filler strip is recommended. Refer to Accessories on page 3. **IMPORTANT NOTE**: When multiple cooktops and/or modules are installed side by side, each unit must have its own separate recommended electrical circuit. When multiple gas cooktops and/or modules are installed next to one another, they can receive their gas supply from a common line. However, each unit must have its own regulator installed between the mainline and the cooktop or module.

IMPORTANT NOTE: Review specifications for each specific integrated module for installation requirements and limitations. Refer to the integrated modules section of our website, wolfappliance.com.

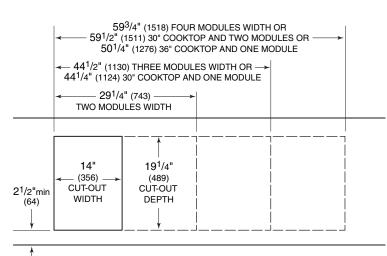

FRONT OF COUNTERTOP

Countertop cut-out dimensions for installation of multiple cooktop units.