


VentA-Hood® WALL MOUNT LINER INSERT SPECIFICATIONS

BPSLD/BHPSLD LINER "H" in part number indicates halogen lighting. This model not available with heat lamps.

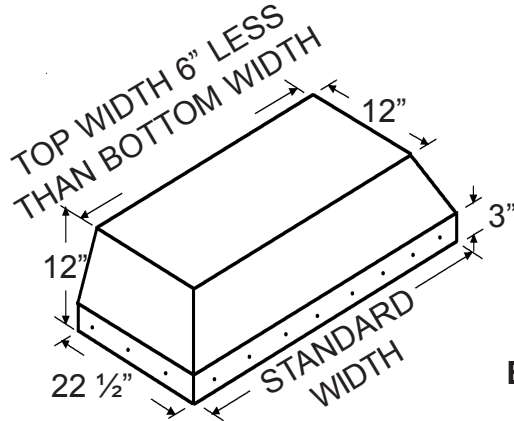


BPSLD/BHPSLD

Standard Widths


28 3/8"
34 3/8"
40 3/8"
46 3/8"
52 3/8"
58 3/8"
64 3/8"

Connection Diagram (28 3/8" - 52 3/8" Widths)

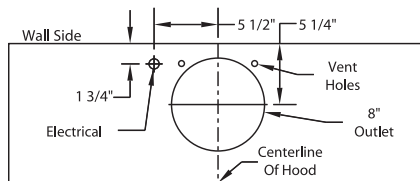


**600 CFM B200 Dual Blower
(Top View)**

Connection Diagram (46 3/8" - 58 3/8" Widths)

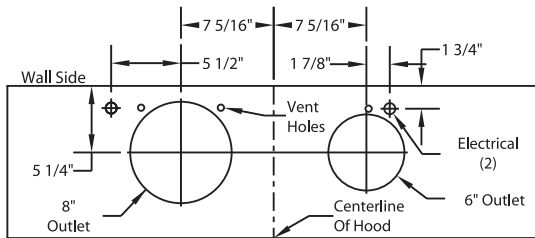


**900 CFM B200 Dual & B100 Single Blower
(Top View)**

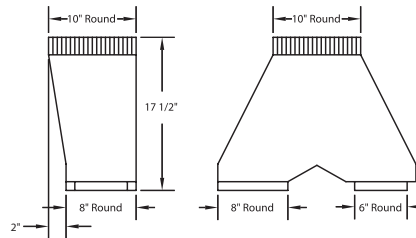


**VP562 Transition (Optional) For B300
(B200 Dual Blower & B100 Single Blower)**

Connection Diagram (52 3/8" - 64 3/8" Widths)

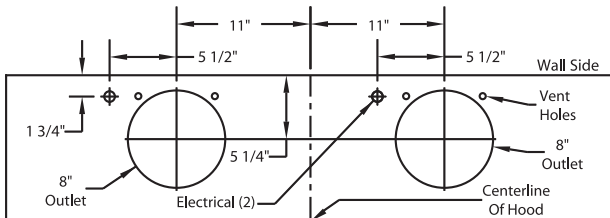


**1200 CFM Double B200 Dual Blowers
(Top View)**

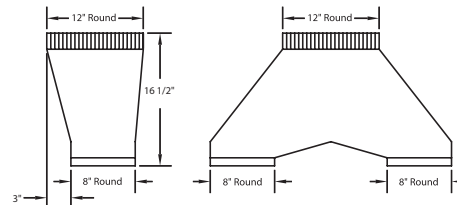


**VP563 Transition (Optional) For B400
(Double B200 Dual Blowers)**

Recommended Mounting Height*

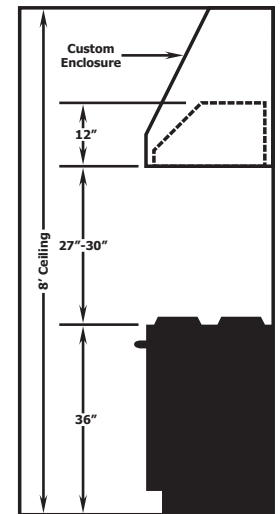

*Exceeding recommended mounting height may compromise performance.



**VP562/VP563
transition
centers outlet
over top of hood**

Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	RPM	CFM SP@0.0"	Equivalent CFM#	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Square Inches
B100 Single	115	1.7	1550	300	450	286	270	240	6" (or equivalent)	28
B200 Dual	115	3.4	1550	600	900	572	540	480	8" (or equivalent)	50

* Note: Add 2.5 amps for each warming light and 0.5 amp for each halogen light.

Because the Magic Lung™ uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung™ blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung™ with other blower units made by other manufacturers, use the "Equivalent CFM".