


BUILT-IN SIDE BY SIDE REFRIGERATOR

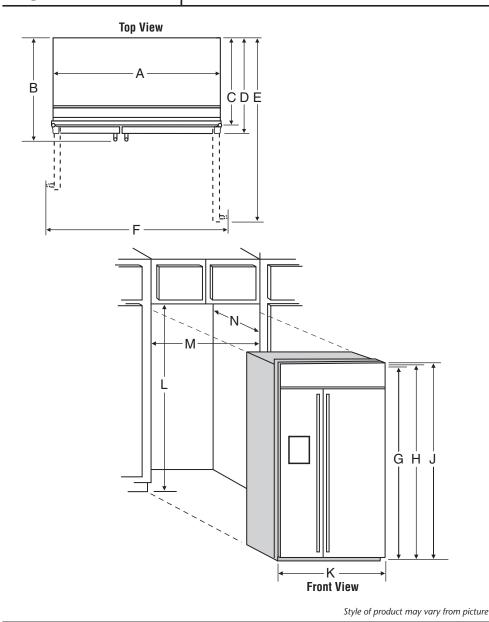

PRODUCT DIMENSIONS

| | INCHES | CENTIMETERS |
|----------------|---------|-------------|
| Α | 48 1/16 | 122.1 |
| B¹ | 27 1/8 | 68.9 |
| С | 23.796 | 60.4 |
| D ² | 25 1/4 | 64.1 |
| E ³ | 52 9/16 | 133.5 |
| F⁴ | 51 7/8 | 131.8 |
| G⁵ | 83 1/16 | 211.0 |
| H ⁶ | 83 1/16 | 211.0 |
| J^7 | 83 3/8 | 211.8 |
| K ⁹ | N/A | N/A |
| L | 83 3/4 | 212.7 |
| М | 47 1/2 | 120.7 |
| N | 24 | 61.0 |

MODEL SKUs

JS48PPDBDA

NOTES:

- 1. Depth with doors closed, including handle.
- 2. Depth with doors closed, excluding handle.
- 3. Depth with doors open at 90 degrees.
- 4. Width with doors open at 90 degrees, including handles.
- 5. Height to top of refrigerator.
- 6. Height to top of refrigerator including door hinge.
- 7. Height to top of refrigerator door trim (if needed for trim models).
- 8. When installing refrigerator in or near a corner, allow enough room for door to open without interfering with cabinet drawers or hardware.
- 9. Width closed including door and trim.
- 10. Add1"/2.5 cm to depth (B) for extended handle kit, if used on framedmodel.
- 11. Add 2"5.08 cm to width (F) for extended handle kit, if used on framedmodel.

Electrical requirements: Adequately wired individual 120V A/C, 60Hz approved electrical circuit. Use required fuse (15 amp) or comparable circuit breaker.