


Proximity to Side Cabinet Installation

1. This range may be installed directly adjacent to existing 36" (91.4 cm) high base cabinets. **IMPORTANT:** The side trim **MUST** be 3/8" (.95 cm) above the adjacent base cabinet countertop. This may be accomplished by raising the unit using the adjustment spindles on the legs.
2. The range **CANNOT** be installed directly adjacent to sidewalls, tall cabinets, tall appliances, or other side vertical surfaces above 36" (91.4 cm) high. There must be a minimum of 6" (15.2 cm) side clearance from the range to such combustible surfaces above the 36" (91.4 cm) counter height.
3. Within the 6" (15.2 cm) side clearance to combustible vertical surfaces above 36" (91.4 cm), the maximum wall cabinet depth must be 13" (33.0 cm) and wall cabinets within this 6" (15.2 cm) side clearance must be 18" (45.7 cm) above the 36" (91.4 cm) high countertop.
4. Wall cabinets above the range must be a minimum of 42" (106.7 cm) above the range cooking surface for the full width of the range. This minimum height requirement does not apply if a rangehood is installed over the cooking surface.

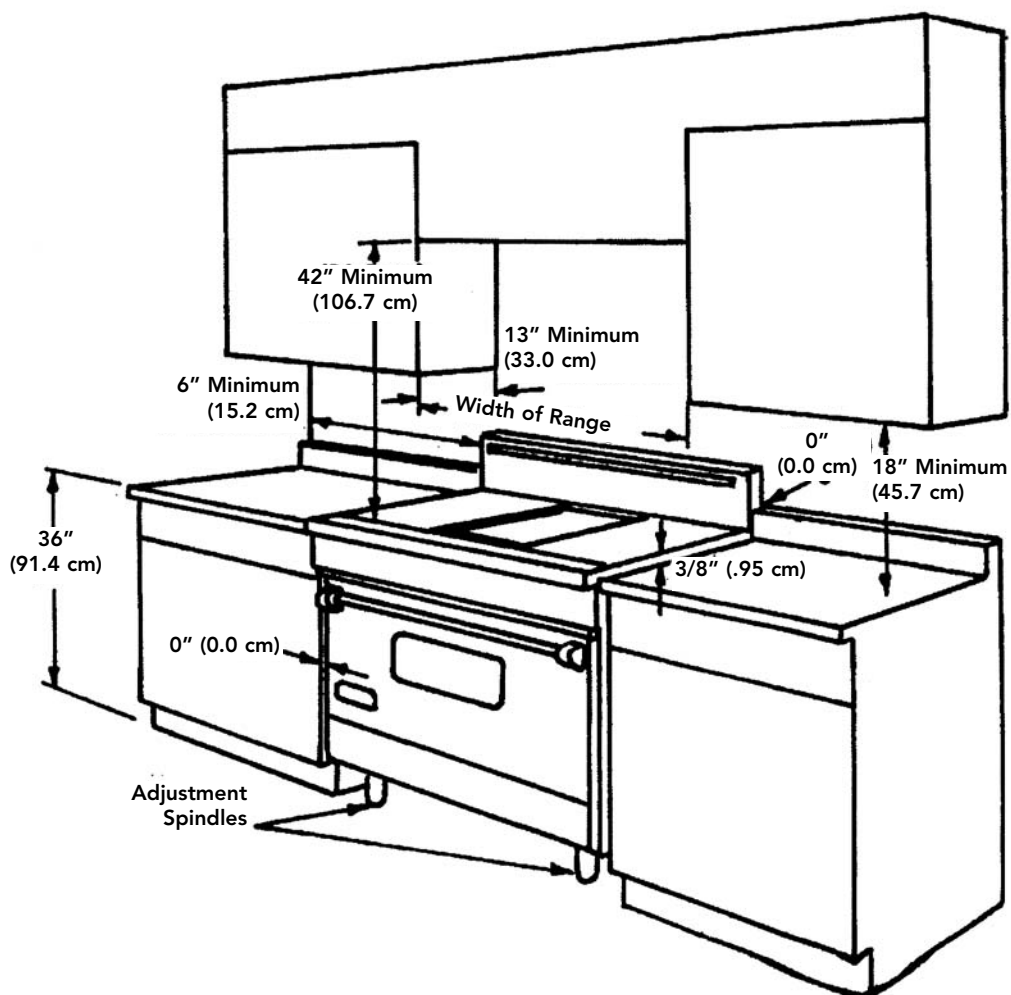

	30" W. Models	36" W. Models	48" W. Models
*Overall Width	29 7/8" (75.9 cm)	35 7/8" (91.1 cm)	47 7/8" (121.6 cm)

Electrical Requirements

Check your national and local codes regarding this unit. This range requires 3 wires, 240-208/120 VAC/60 Hz. See next section for grounding instructions. It should be fused separately. **CAUTION:** Be sure the electrical power is off from the breaker box to the junction box until the range is installed and ready to operate. The junction box should be located as shown in the drawing and connected to a suitable ground.

Specifications - Dual Fuel 30", 36" W. and 48" W. Ranges

Description	30" W. Models	36" W. Models	48" W. Models									
Overall width	29 7/8" (75.9 cm)	35 7/8" (91.1 cm)	47 7/8" (121.6 cm)									
Overall height	<u>Base Height</u> To top of burner grate - Min. 37 3/8 " (94.9 cm) to Max. 39 1/8" (99.4 cm) Legs adjust 1 3/4" (4.5 cm)											
<u>Additions to Base Height</u>	To top of island trim - add 1 1/4" (3.2 cm) To top of 6" backguard - add 6" (15.2 cm) To top of 10" backguard - add 10" (25.4 cm) To top of high shelf - add 23 1/2" (59.7 cm)											
Overall depth from rear	To end of side panel - 24 5/16" (61.8 cm) To end of control panel - 26 1.4" (66.7 cm) To end of knobs - 27 3/4" (70.5 cm)											
Electrical requirements	240-208/120 VAC, 60 Hz electrical connection box on product, connect with locally supplied 3-wire, flexible cord or "pigtail" rated 40 amp 125-250 VAC minimum. Cord must be agency approved for use with household electric ranges.											
Gas requirements	Shipped natural gas standard; field convert to LP/Propane with standard convertible regulator; accepts standard residential 1/2" (1.3 cm) ID gas service line.											
Maximum amp usage	240V-6098 watts; 25.4 amps 208V-4757 watts; 22.9 amps	6B-240V-6634 watts; 27.6 amps 208V-5163 watts; 24.8 amps 4G-240V-7462 watts; 31.1 amps 208V-5880 watts; 28.3 amps 4Q-240V-6634 watts; 27.6 amps 208V-5163 watts; 24.8 amps	6G- 240V-8914 watts; 37.1 amps 208V-6994 watts; 33.6 amps 6Q- 240V-8050 watts; 33.5 amps 208V-6245 watts; 30.0 amps 4GQ-240V-8914 watts; 37.1 amps 208V-6994 watts; 33.6 amps 4G- 240V-8878watts; 37.0 amps 208V-6963 watts; 33.5 amps 4Q- 240V-8050 watts; 33.5 amps 208V-6994 watts; 30.0 amps									
Surface burner rating	15,000 BTU Nat./ 13,500 BTU LP/Propane (4.4 kW Nat. / 4.0 kW LP)											
Griddle burner rating	N/A	15,000 BTU Nat./ 13,500 BTU LP/Propane (4.4 kW Nat. / 4.0 kW LP)										
Grill burner rating	N/A	12" - 1@ 18,000 BTU Nat.(5.3 kW)/16,00 BTU LP/Propane (4.7 kW) 24" - 2@ 15,000 BTU Nat.(4.4 kW)/13,500 BTU LP/Propane (4.0 kW)										
Preheat rating	240V - 6000 watts 208V - 4530 watts	240V - 6460 watts 208V - 4850 watts	240V -6000 watts 208V - 4530 watts									
Broil rating	<table><tr><td></td><td>240V</td><td>208V</td></tr><tr><td>Maxi Broil</td><td>8 Pass 3000 watts</td><td>2250 watts</td></tr><tr><td>Mini Broil</td><td>4 Pass 1250 watts</td><td>940 watts</td></tr></table>				240V	208V	Maxi Broil	8 Pass 3000 watts	2250 watts	Mini Broil	4 Pass 1250 watts	940 watts
	240V	208V										
Maxi Broil	8 Pass 3000 watts	2250 watts										
Mini Broil	4 Pass 1250 watts	940 watts										
Bake rating (partial power from broil element)	240V - 2935 watts 208V - 2247 watts	240V - 3440 watts 208V - 2620 watts	Right - 240V - 2935 watts 208V - 2247 watts Left - 240V - 1932 watts 208V - 1494 watts									
Convection cook rating	240V - 2200 watts 208V - 1650 watts											
Oven Interior width	23" (58.4 cm)	29" (73.7 cm)	Right - 23" (58.4 cm) Left - 12 1/8" (30.8 cm)									
Oven Interior height	16 1/8" (41.0 cm)											
Oven Interior depth	15 3/8" (39.1 cm)		Right - 15 3/8" (39.1 cm) Left - 17 1/4" (43.8 cm)									
Oven Interior overall size	3.3 cu. ft.	4.2 cu. ft.	Right - 3.3 cu. ft. Left - 2.1 cu. ft									
Approximate Shipping wt.	424 lbs. (190.8 kg)	6B - 465 lb. (209.3 kg) 4Q - 470 lb. (211.5 kg) 4G - 475 lb. (213.8 kg)	6G - 624 lb. (280.8 kg) 6Q - 620 lb. (279.0 kg) 4GQ - 629 lb. (283.1 kg) 4G- 635 lb. (285.8 kg) 4Q- 625 lb. (281.3 kg)									

Minimum clearances from adjacent combustible construction

•Cooking surface and below (36" [91.4 cm] and below)

•Sides - 0"

•Rear - 0" with backguard or high shelf; 0" with island trim and non-combustible rear wall; 6" (15.2 cm) with island trim and combustible rear wall.

•Top grate support - 36" (91.4 cm)

•Above cooking surface (above 36" [91.4 cm])

•Sides - 6" (15.2 cm)

•Within 6" (15.2 cm) side clearance, wall cabinets no deeper than 13" (33.0 cm) must be minimum 18" (45.7 cm) above cooking surface.

•Wall cabinets directly above product must be minimum 36" (91.4 cm) above cooking surface