STACKING KIT INSTALLATION

1)Position the unit on a level surface, capable of supporting the entire weight of the dryer.
Remember that the unit will be heavier when it is fully loaded.
Clean the surface where the stacking kit is going to be installed.
Place the mounting bracket on the Washer as indicated.

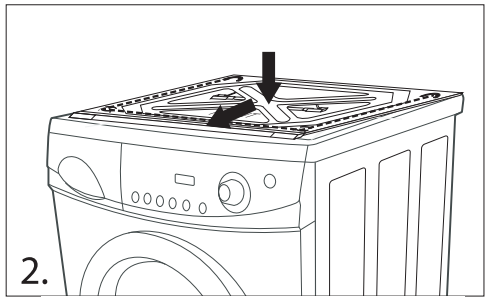

2) Put stacking kit on washer and slide forward with pushing "FRONT" lightly to being stuck by threshold. Make sure the word FRONT printed on the stacking kit is facing forward.

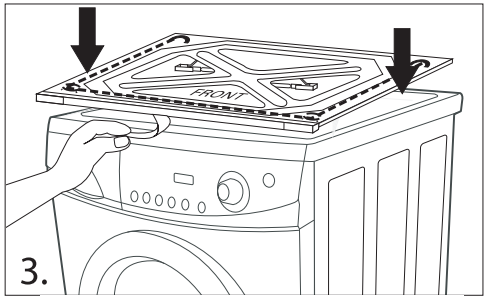

3) Remove the double back tape and firmly attach the stacking kit the top of the washer to assure the proper seal.

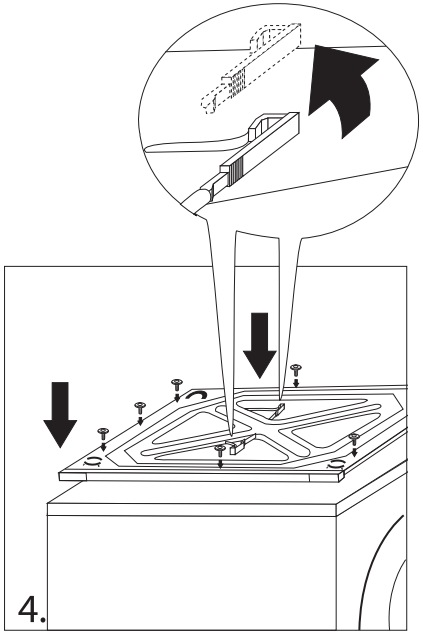

4) Remove the 2 plastic covers (shown in figure 7) attached to the middle of the stacking kit, and save these for later use. Install all 7 screws provided with a power drill and tighten the stacking kit to the unit base securely.

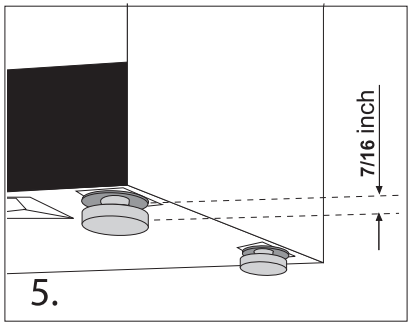

5) Your Dryer is equipped with 4 leveling legs .
Make sure they are lowered so there is a 7/16 inch gap between the foot of the leg and the dryer base.

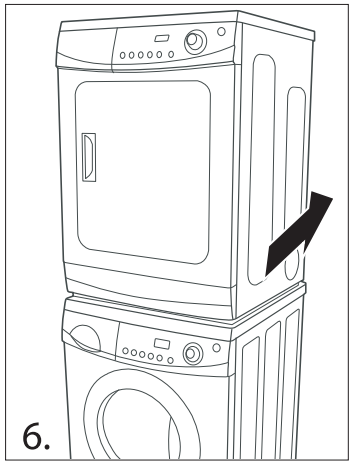

6) Gently push the dryer into position as indicated in figure 6 & 7, sliding the unit into the slots provided.
It is important that the dryer is level.
Make sure all four leveling legs are pushed all the way back into the slots to ensure proper mounting.

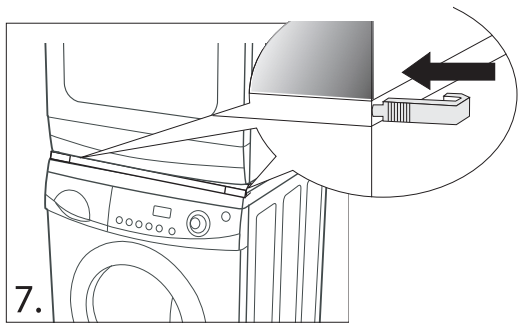

7) Insert the plastic covers (removed in section 4) covering the two front slots of the leveling legs.
Depending upon the location of the unit, it may be necessary to change the side on which the dryer door opens.

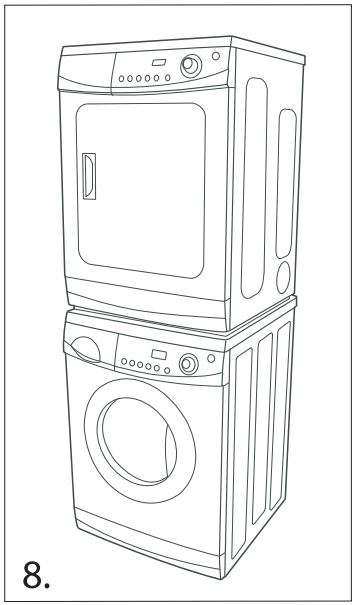

INSTALLATION DE LA TROUSSE DE SUPERPOSITION

1) Placez l'unité sur une surface de niveau pouvant supporter tout le poids de la sécheuse. N'oubliez pas que l'appareil sera plus lourd une fois rempli à pleine capacité. Nettoyez la surface sur laquelle vous installerez la trousse de superposition.
Posez le support de fixation sur la laveuse, comme il est indiqué.

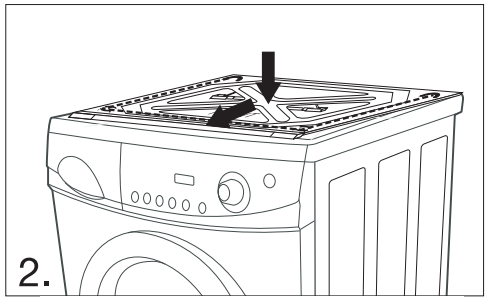

2) Placez la trousse de superposition sur la laveuse et faites glisser doucement la trousse de superposition vers le mot " FRONT " (avant) jusqu'à ce qu'elle s'enclenche dans le seuil. Assurez-vous que le mot " FRONT " imprimé sur la trousse de superposition est orienté vers l'avant.

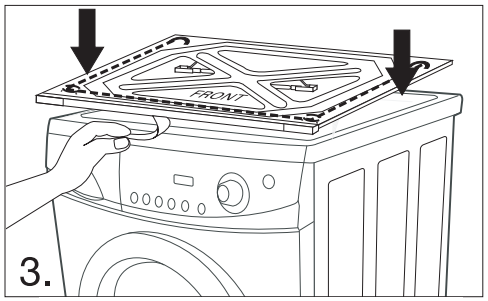

3) Enlevez le ruban double et fixez solidement la trousse de superposition sur le dessus de la laveuse pour assurer un joint adéquat.

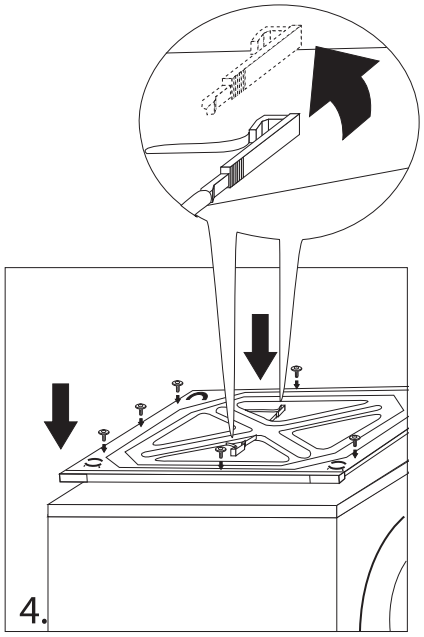

4) Retirez les 2 capuchons en plastique (montrés à la figure 7) fixés à la partie centrale de la trousse de superposition et mettez-les de côté pour plus tard.
Posez les 7 vis fournies à l'aide d'une perceuse électrique pour bien fixer la trousse de superposition à la base de l'unité.

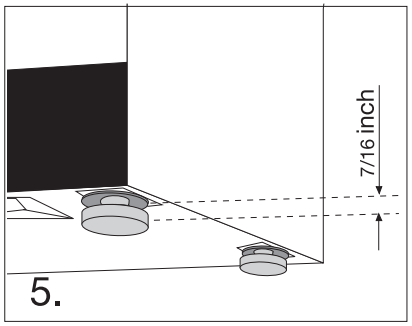

5) Votre sécheuse est munie de 4 pieds de mise à niveau. Abaissez-les de façon à obtenir un écart de 1,1 cm (7/16 po) entre la base du pied et la base de la sécheuse.

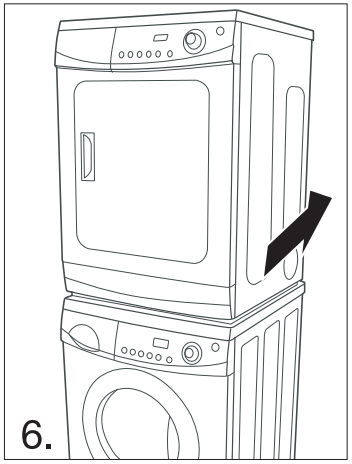

6) Poussez doucement la sécheuse en position comme il est indiqué aux figures 6 et 7, en faisant glisser l'unité dans les rainures aménagées. Il est important que la sécheuse soit de niveau.
Assurez-vous que les quatre pieds de mise à niveau sont complètement rentrés dans les rainures pour obtenir un montage adéquat.

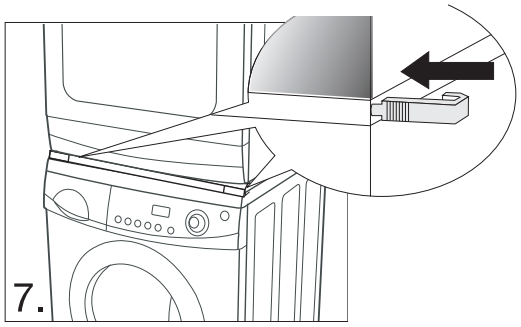
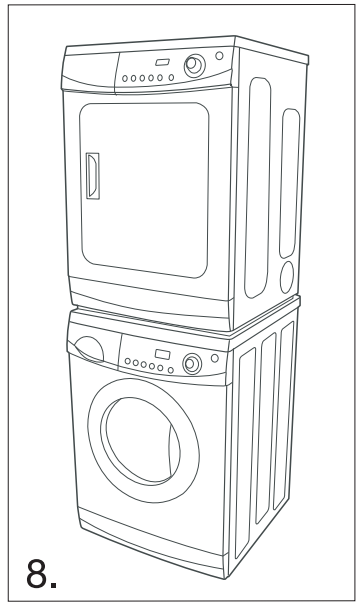
7) Insérez les capuchons en plastique (retirés à la section 4) recouvrant les deux rainures avant des pieds de mise à niveau.
Selon l'endroit de l'installation, il faudra peut-être faire en sorte s'ouvre que la porte de la sécheuse de l'autre côté.