Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

DT-400BAH-OS

OPTI-SERVE SERIES

SANITARY CUBELET ICE MACHINE/DISPENSER

DT-400BAH-OS
4/08
Item # 13198

DIMENSIONS
W x D x H

DT-400BAH-OS
21 x 22 1/2 x 72 1/2*
*with 6" legs



DT-400

DT-400BAH-OS
Air-Cooled
Shown

DT-400BAH-OS

- CleanCycle12® - Every 12 hours, unit performs 15 minute purge to rid itself of impurities
- LED Remote sensor for hands-free operation
- Sealed LED housing prevents moisture from entering, eliminating the possibility of an electrical short
- Corrosion resistant stainless steel exterior
- Up to 409 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Easy to chew, cubelet ice
- Self contained design reducing opportunities for cross contamination
- Dispenses ice and water
- Removable air filters (Air-cooled model only)
- Protected by *HoshiGuard* Antimicrobial Agent

NSF c UL US LISTED ISO HOSHIZAKI • ISO 9001

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.

Five Year - Parts on: Compressor, air-cooled condenser.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

DT-400BAH-OS
SANITARY CUBELET ICE MACHINE/DISPENSER - OPTI-SERVE SERIES

Hoshizaki

DIMENSIONS
W x D x H

DT-400BAH-OS
21 x 22 1/2 x 72 1/2

- Hands-free ice machine/dispenser

AIR-COOLED

Air Temp° F. \ Water Temp° F.	50°	70°	90°
70°	409	388	370
80°	354	338	322
90°	308	**296**	281

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	
	90/70	70/50	90/70	70/50
DT-400BAH-OS	7.6	5.2	12.0	12.0

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
DT-400BAH-OS	Air-Cooled	11.5	N/A	308 lbs.

CUBELET DIMENSIONS



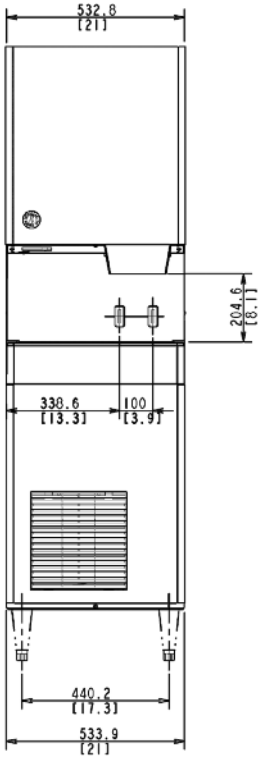

FRONT VIEW

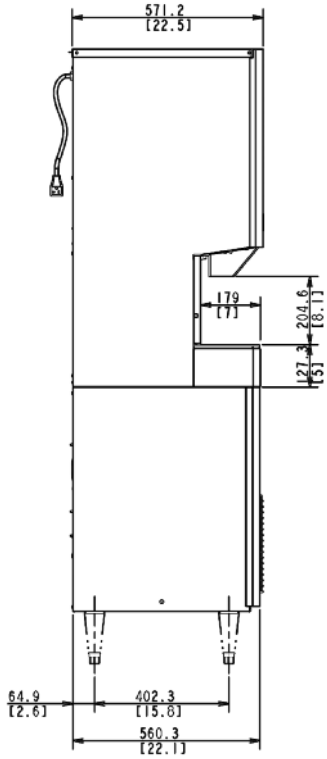

SIDE VIEW

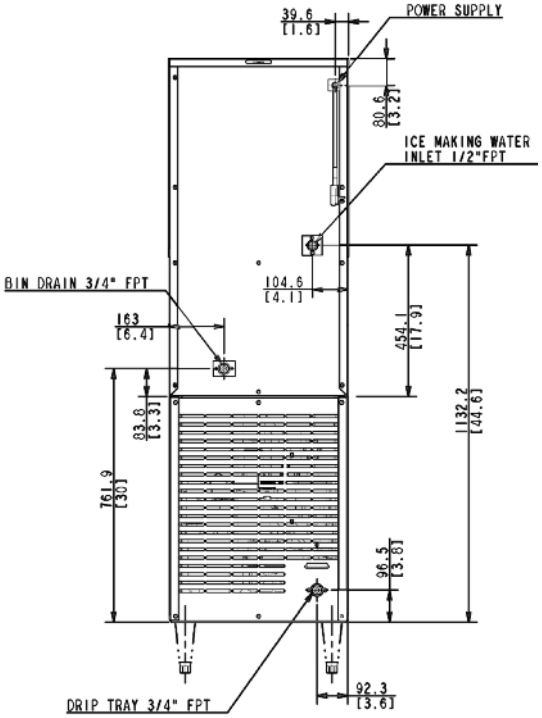

BOTTOM VIEW

ELECTRICAL & PLUMBING/DT-400BAH-OS

- 115V/60/1
- 1/2" OD copper or equivalent independent water supply
- 3/4" independent drain connection

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.