6-CYCLE/6-OPTION DISHWASHER

PRELIMINARY

Stainless Steel
KDTE404DSS

PROSCRUB® TRIO OPTION

Helps provide concentrated cleaning options in the upper and lower racks. In addition to the 40 spray jets at the back of the dishwasher, you get two concentrated spray zones in the upper rack to clean deeper or oddly shaped items.

SATINGLIDE® MAX UPPER AND LOWER RACKS

Create a smooth, premium feeling when pulling out the dishwasher racks, particularly with heavy loads. Premium adjusters make it easy to raise or lower the upper rack while the rails help keep both racks solidly on track.

PRODRY™ OPTION

A selectable option that helps ensure dry dishes with the addition of a fan that optimizes the performance of the recessed heating element.

KDTE404D – 43 dBA*

PERFORMANCE

- Filter-Based Wash System
- 6 Cycles (ProWash,™ Tough, Normal, Light, Express Wash, Rinse Only)
- 6 Options (ProDry,™ ProScrub® Trio, Hi-Temp Wash, Sani Rinse, 4-Hour Delay, Control Lock)
- Dedicated Drying System with ProDry™ Option
- Whisper Quiet® 43 Sound Insulation System
- ENERGY STAR® Qualified
- CEE Tier 1 Qualified

CRAFTSMANSHIP & DESIGN

- Concealed Controls
- Architect® Series II Handle
- Durable Stainless Steel Construction
  – Inner Tub
  – Lower Wash Arms
- 15 Place Setting Capacity
- Status Lights with Exterior Cycle Indicator
- Flood Protection Technology
- DuraKote™ Nylon-Coated Racks

Upper Rack

- Adjustable with SatinGlide® Max System
- Robust Handle with Stainless Steel Insert
- 2 Fold-Down Rows with Two-Position Tines
- 4 Sure-Hold® Light Item Clips
- 2 Fold-Down Shelves with Stemware Holders
- Utility Basket

Lower Rack

- SatinGlide® Max System
- Fold-Down Row with Three-Position Tines
- Sliding Tines
- Culinary Caddy® Utensil Basket
- Silverware Basket with Two Lids

COLOR

- White (WH)
- Black (BL)
- Stainless Steel (SS)

*Per IEC standards, normal cycle.

6-CYCLE/6-OPTION DISHWASHER

KDTE404D

PRELIMINARY

PRODUCT DIMENSIONS

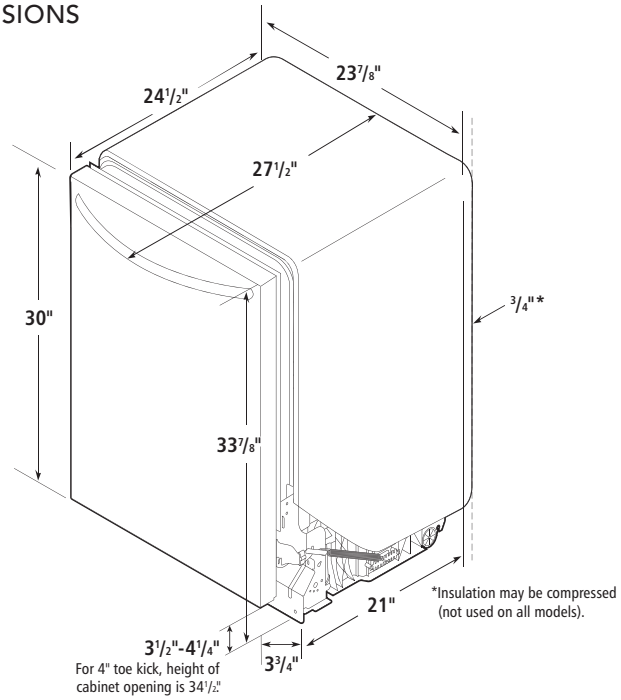

CUTOUT DIMENSIONS

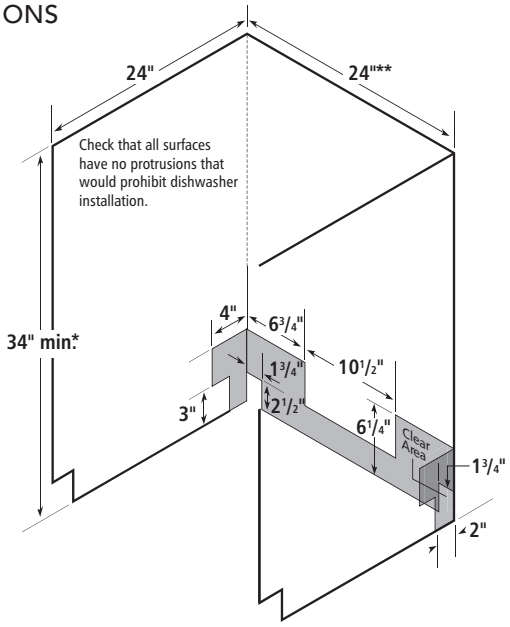

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measured from the lowest point on the underside of countertop. May be reduced to 33 1/2" by removing the wheels and perforated area of insulation (blanket) on dishwasher.

**Minimum, measured from narrowest point of opening.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

For additional information about KitchenAid® appliances, visit KitchenAid.com or call the Customer Experience Center at 800-422-1230. We'll help you select the ideal model and answer questions about appliance operation and performance.

ENERGY STAR

KitchenAid®

®/™ ©2013 KitchenAid. All rights reserved.