

Puristic Wall  
Ventilation Hood

DA 6690 W



# Puristic Wall Ventilation Hood DA 6690 W



## FEATURES

- LED ClearView lighting
- Con@ctivity — communication between hood and cooktop
- Touch on Glass controls
- Four fan speeds (incl. intensive)
- Removable, dishwasher-safe stainless steel grease filter
- Filter saturation indicator
- Delayed shutdown for 5 or 15 minutes
- Automatic shutdown of intensive level, programmable for 10 minutes

## SPECIFICATIONS


DA 6690 W — Item 28669050USA

Vented or Recirculating	625 CFM setting
Canopy Dimensions	35 <sup>3</sup> / <sub>8</sub> " (898mm) W x 3 <sup>3</sup> / <sub>8</sub> " (85mm) H x 19 <sup>1</sup> / <sub>16</sub> " (500mm) D
Dimensions (Standard Height) - Vented	28" — 40 <sup>9</sup> / <sub>16</sub> " (710—1030mm) H
Dimensions (Standard Height) - Recirculating	33 <sup>1</sup> / <sub>16</sub> " — 45 <sup>11</sup> / <sub>16</sub> " (840—1160mm) H
Chimney Dimensions	11 <sup>3</sup> / <sub>8</sub> " (290mm) W x 10 <sup>5</sup> / <sub>8</sub> " (270mm) D
Minimum distance above cooktop	Please refer to page 26 of the installation manual
Color	Available in brushed stainless steel or RAL colors
<b>Electrical</b>	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	Molded plug 2.5 ft (0.75m) NEMA 5-15
Electrical Rating	359 W (Blower: 350 W; Lighting: 3x3 W)
<b>Optional Accessories</b>	
Recirculating Kit	DUW 20 Recirculating Kit
OdorFree Charcoal Filter	DKF 12-1 OdorFree Charcoal Filter
Reducing Collar (air flow max. 400 CFM)	
<b>Shipping</b>	
Shipping Weight	57.2 lbs (26kg)
<b>Support</b>	
Call	800.843.7231
20/20	2020technologies.com

# Puristic Wall Ventilation Hood DA 6690 W



## PRODUCT VIEW

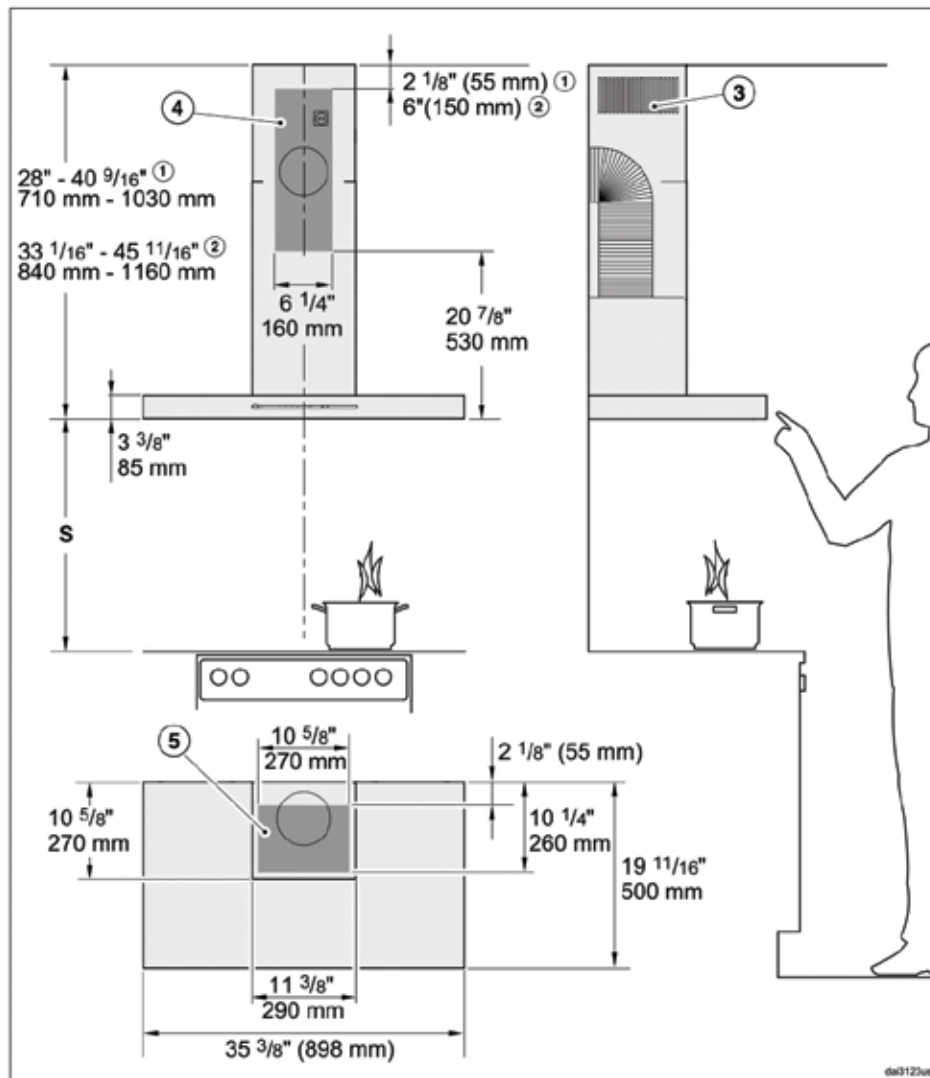

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④⑤ Mounting area (only ④ is required for recirculation ventilation hoods). Wall and ceiling area for exhaust duct opening and for wall socket installation. Only the wall socket installation is required for recirculation hoods.

Vent collar  $\varnothing$  6" (150 mm), with adapter  $\varnothing$  5" (125 mm).

PLEASE NOTE: The majority of the weight of the installed ventilation system will be supported by the lower retaining plate. It must be firmly attached to the stud framing behind the drywall. If studs are not available in the required locations, a plywood backing (min. 1/2" (13 mm) thick) spanning at least two studs must be installed. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.