MARVEL

24" Marvel High-Efficiency Dual Zone Wine Refrigerator

Model # ML24WD

33 ³/₄" H

25 ⁵/₈" D including handle

23 ⁷/₈" W

Performance

- Two independently-controlled temperature compartments offer dual options for storing and serving: the top between 55° F and 62° F and the bottom between 45° F and 55° F

- Up to 2x more efficient than leading competitors

- Dynamic Cooling Technology™ delivers the industry's best temperature stability and rapid cool down, safely bringing wine to temperature without compromising integrity

- Vibration Neutralization System™ protects wine from agitation, allowing it to come to full maturation

- Thermal-efficient cabinet ensures optimum wine preservation and energy efficiency while maximizing capacity

- Argon-filled, UV-resistant tinted dual pane glass door protects contents from damaging ultraviolet light

- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

Storage Capabilities

- 4.9 cu. ft. capacity, stores 40 bottles of wine: upper zone includes (3) 8-bottle roller-glide wine racks and lower zone includes (1) 8-bottle roller-glide wine rack and (2) 4-bottle half-depth roller-glide wine racks

- Heavy-gauge wire wine racks safely cradle each wine bottle

Touchpad Controls

- Multifunction Marvel Intuit™ Integrated Controls allow you to select a precise cabinet temperature for dual zones

Aesthetics

- Two-stage, white theater LED lighting and midnight black interior and natural maple shelf fronts, stainable to match cabinetry

- Easy-to-install panel overlay option features soft-close integrated hinge for a truly flush fit with cabinetry

- Finish options: stainless steel, black or overlay (panel ready)

Additional Convenience

- Close Door Assist System™ gently and automatically draws door to a close, ensuring door is never accidentally left ajar

- Black toe kick adjustable up to 4" with leveling legs

- 1-year parts and labor warranty, 5-year sealed system parts warranty
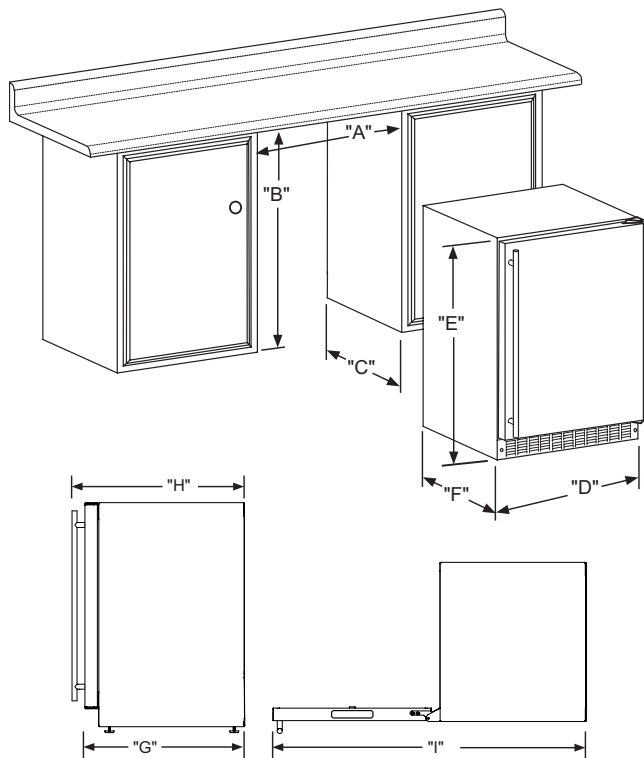
Ordering Options

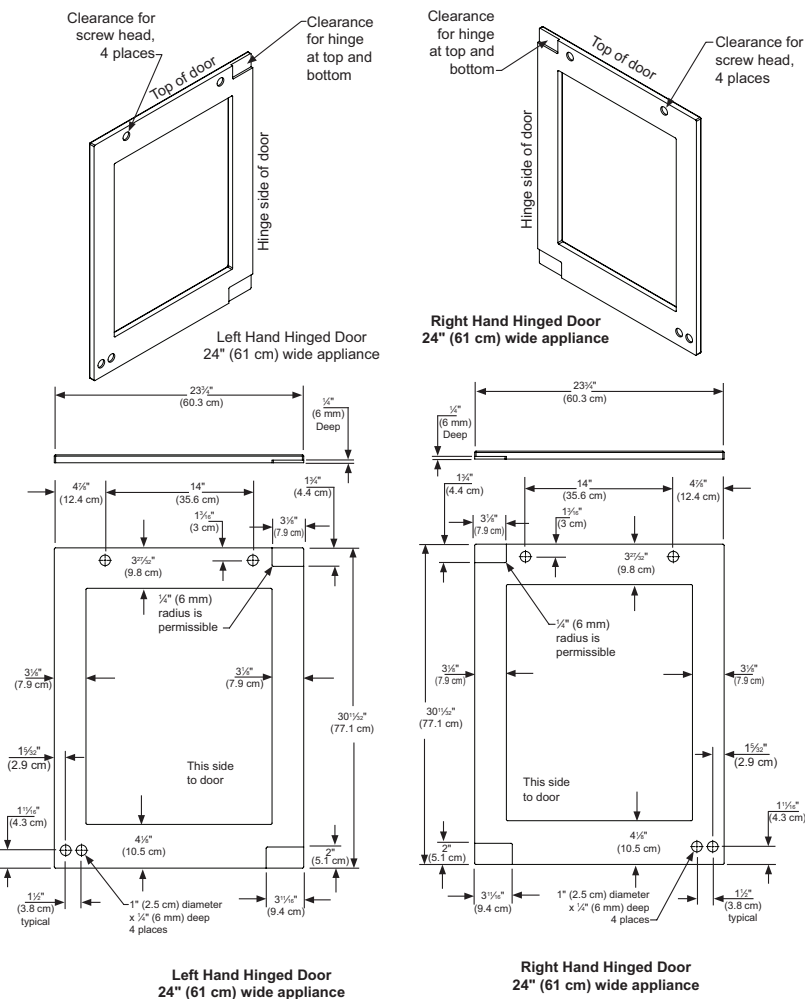|	
Stainless Frame, Glass Door, Right Hinge, Stainless Designer Handle	ML24WDG3RS
Stainless Frame, Glass Door, Left Hinge, Stainless Designer Handle	ML24WDG3LS
Smooth Black Frame, Glass Door, Right Hinge, Black Designer Handle	ML24WDG3RB
Smooth Black Frame, Glass Door, Left Hinge, Black Designer Handle	ML24WDG3LB
Panel-Ready Framed Glass Door, Integrated Right Hinge (Handle Not Included)*	ML24WDF4RP
Panel-Ready Framed Glass Door, Integrated Left Hinge (Handle Not Included)*	ML24WDF4LP
Panel-Ready Solid Overlay Door, Integrated Right Hinge (Handle Not Included)*	ML24WDP4RP
Panel-Ready Solid Overlay Door, Integrated Left Hinge (Handle Not Included)*	ML24WDP4LP

*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.

Finish Options

Stainless Steel

Framed Overlay (Panel Ready)*

Black Frame

Solid Overlay (Panel Ready)*

Made in the USA

Product Dimensions

Panel Overlay Dimensions

Left Hand Hinged Door
24" (61 cm) wide appliance

Right Hand Hinged Door
24" (61 cm) wide appliance

Rough-In Dimensions

A. Rough-In Width		24″
B. Rough-In Height	Solid Door	34″ to 35″
	Overlay Door	34″ 1/4 to 35″ 1/4
C. Rough-In Depth		24″

Product Dimensions

D. Width		23 7/8″
E. Height	Solid Door	33 3/4″ to 34 3/4″
	Overlay Door	34″ to 35″
F. Depth		21 1/2
G. Depth to Front of Door	Solid Door	23 23/32″
	Overlay Door	22 7/8″ Without Handle
H. Depth to Handle		25 21/32″ (Stainless Steel)
I. Depth with door at 90°	Solid Door	46 13/32″
	Overlay Door	46 1/2″

Product Features

Interior Cabinet Finish	Black
Capacity	Up to 40 wine bottles 24 Upper Zone 16 Lower Zone
Shelving System	Roller-Glide System
Shelf Fronts	Natural Maple
Other Storage	NA
Interior Lighting	White LED
Toe Grill Finish	Black
Hinge	Classic Hinge
Handle	Slim Designer Handle (Panel Overlay Does Not Include Handle)
Control Type	Intuit™
Temperature Range	Upper Zone: 55° to 62° F Lower Zone: 45° to 55° F
Lock	No
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	6″
Shipping Weight	160 lbs
Finishes	Stainless Steel, Overlay, Black
Vacation Mode	Yes
Agency Approvals	CSA

For comprehensive installation instructions, please visit
www.marvelrefrigeration.com to access the owner's guide.

Panel Overlay Dimensions

Clearance for screw head, 4 places

Top of door

Hinge side of door

Left Hand Hinged Door
24" (61 cm) wide appliance

Clearance for hinge at top and bottom

Clearance for screw head, 4 places

Top of door

Hinge side of door

Right Hand Hinged Door
24" (61 cm) wide appliance

Clearance for hinge at top and bottom

23¾" (60.3 cm)

¼" (6 mm) Deep

4⅞" (12.4 cm)

14" (35.6 cm)

1¾" (4.4 cm)

1⅜" (3 cm)

3⅛" (7.9 cm)

¼" (6 mm) radius is permissible

30½" (77.1 cm)

This side facing interior

1⁵⁄₃₂" (2.9 cm)

1¹¹⁄₁₆" (4.3 cm)

2" (5.1 cm)

1½" (3.8 cm) typical

1" (2.5 cm) diameter x ¼" (6 mm) deep 4 places

3¹¹⁄₁₆" (9.4 cm)

Left Hand Hinged Door
24" (61 cm) wide appliance

¼" (6 mm) Deep

1¾" (4.4 cm)

14" (35.6 cm)

4⅞" (12.4 cm)

3⅛" (7.9 cm)

1⅜" (3 cm)

¼" (6 mm) radius is permissible

30½" (77.1 cm)

This side facing interior

1⁵⁄₃₂" (2.9 cm)

1¹¹⁄₁₆" (4.3 cm)

2" (5.1 cm)

3¹¹⁄₁₆" (9.4 cm)

1" (2.5 cm) diameter x ¼" (6 mm) deep 4 places

1½" (3.8 cm) typical

Right Hand Hinged Door
24" (61 cm) wide appliance