HOTPOINT®

July 2005

Complete your kitchen with the look of stainless.

HOTPOINT®

In Silver Metallic

Hotpoint in silver metallic. Today's alternative to stainless.

Offer a striking contemporary look

- Unique silver metallic finish complements any kitchen décor, countertop and cabinetry regardless of their color or finish
- Full-line of appliances offer a distinct design advantage

Take advantage of this durable design option

- Silver metallic finish resists fingerprints and is easy to wipe clean
- Refrigerators hold magnets for everyday convenience

Enhance the look of your kitchen with the look of stainless steel

- Stainless steel is a growing trend and GE is leading the way
- Increases perceived value of your property
- Coordinates with other appliance colors

Table of **Contents**

Refrigeration
- Side-By-Sides 6-7
- Top-Freezers 8-16
- GE Spacemaker® 17
- GE Upright Freezers 18
- GE Chest Freezers 19
- Specifications 20-23

Free-Standing Ranges
- Smooth Top 24
- Coil Top 25
- Electric 26
  - 30" Ranges 26-31
  - Specialty Application Ranges 31
  - Specifications 32-33
- Gas 34
  - 30" Ranges 34-37
  - Specialty Application Ranges 37
  - Specifications 38-39

Hoods 40
- Specifications 41

Microwave Ovens
- Counter Saver Plus™ and Countertop 42
- GE Spacemaker II™ and Countertop 43
- GE Trim and Hanging Kits 43
- Specifications 44-45

Dishwashers 46-47
- GE Spacemaker® Undersink 48
- GE Built-In 18" 48
- GE Convertible 48
- Specifications 50-52

GE Disposers and GE Compactors 49
- Specifications 53

Washers and Dryers
- Super and Extra-Large Capacity Washers 54
- Super and Extra-Large Capacity Dryers 55
- GE Spacemaker® Washers and Dryers 56
- GE Unitized Washer and Dryer 57
- Specifications 58-61

GE Air Conditioning
- GE Air Conditioning 62-65
- GE Slide-Aire and Heat/Cool 66
- GE Dehumidifiers, GE Portable and Low Profile Air Conditioners 67
- GE Built-in Series 68-69
- Specifications 70-74

Warranties 75

Consumer Services ..... Back cover

Side-by-Side **Refrigerators**

Hotpoint® side-by-side refrigerators combine storage convenience with state-of-the-art technology. Outside, an extra-tall LightTouch! dispenser delivers filtered water and ice at the slightest touch.

LightTouch! dispenser
Taller LightTouch! dispenser fills sport bottles, pitchers, even blenders! Delivers chilled, filtered water and ice.

Adjustable gallon door bins
Door bins hold gallon containers and six-packs in the fresh food compartment.

FrostGuard™ technology
Defrosts only as needed, reducing freezer burn.

Upfront electronic dial temperature controls
Conveniently located controls are easy to set and see.

Sealed pans
Provide the perfect storage environment for fresh foods.

HSM25GFR

HSM25GFR
- Silver metallic exterior
- 25.0 cubic foot capacity
- Upfront electronic dial temperature controls
- Tall LightTouch! dispenser
- Three adjustable glass shelves
- Clear vegetable/fruit crisper
- Four door bins (2 adjustable with gallon storage)
- GE SmartWater™ filtration
- FrostGuard™ technology
- Deluxe quiet design
- NeverClean™ condenser

Not all features available on all models.
Complete features and specifications on page 20.

HSS25GFP

HSS25GFP
- Similar features as HSM25GFR in white

Complete features and specifications on page 20.

Top-Freezer **Refrigerators**

Hotpoint® top-freezer refrigerators are designed for total convenience and flexibility. Adjustable shelves provide easy access to contents, while upfront controls allow easy adjustment of temperatures.

Upfront illuminated temperature controls
Conveniently located controls are easy to set and see.

Fixed gallon door storage
Provides storage for gallon containers, six-packs and other large fresh food items.

Clear crispers
Provide easy storage for vegetables and fruits.

Snack pan
Excellent for rewrapped meats, cheese, hors d'oeuvres, pudding and other snacks.

Dairy compartment
Clear, lift-open cover provides easy access to butter, cheese and other dairy products.

Spillproof freezer floor
Seamless design makes freezer cleanup simple.

HTS22GBP

HTS22GBP

- 21.8 cubic foot capacity
- Upfront illuminated fresh food temperature controls
- Two full-width, glass shelves
- Two full-width door bins (1 with gallon storage)
- One split door shelf with gallon storage
- Two clear vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker
- Deluxe quiet design
- Available in white and bisque

Not all features available on all models.
Complete features and specifications on page 20.

HTM18IBP

HTM18IBP

- Silver metallic exterior
- 17.9 cubic foot capacity
- Illuminated upfront slimline temperature controls
- One full-width, two split adjustable glass shelves
- Two clear vegetable/fruit crispers
- Two full-width gallon door bins, one split gallon door shelf
- Spillproof freezer floor

Complete features and specifications on page 20.

Top-Freezer **Refrigerators**

HTS18GBS
- 18.2 cubic foot capacity
- Upfront temperature controls
- Two full-width adjustable glass shelves
- Two fixed gallon door shelves
- Can storage door shelf
- Two clear vegetable/fruit crispers
- Clear snack pan
- Deluxe quiet design
- NeverClean™ condenser
- Available in white

HTS18CCS
- 18.2 cubic foot capacity
- Upfront temperature controls
- Factory-installed automatic icemaker
- Two fixed gallon door shelves
- Can storage door shelf
- Two full-width adjustable wire shelves
- Two classic white vegetable/fruit crispers
- Deluxe quiet design
- NeverClean condenser
- Available in white and bisque

HTS18CBS (not shown)
- Similar features and appearance as HTS18CCS without factory-installed icemaker.
- Available in white and bisque

HTS18GBS

HTS18CCS

Complete features and specifications on page 20.

HTS18BCP
- 18.0 cubic foot capacity
- Upfront illuminated temperature controls
- Two full-width adjustable wire shelves
- Three fixed door shelves (2 with gallon storage)
- Two classic white vegetable/fruit crispers
- Equipped with factory-installed icemaker
- Spillproof freezer floor
- Deluxe quiet design
- NeverClean condenser
- Available in white

HTS18BBP
- Similar features and appearance as HTS18BCP without factory-installed icemaker.
- Available in white and bisque

HTS18BCP

HTS18BBP

Complete features and specifications on page 21.

Top-Freezer **Refrigerators**

Gallon door storage
Accommodates gallon containers for quick access to most-used items.

HTS17HBS
- 16.6 cubic foot capacity
- Upfront temperature controls
- One full-width, two split adjustable glass shelves
- Two fixed gallon door shelves
- Two clear vegetable/ fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean™ condenser
- Available in white and bisque

HTS17GBS
- 16.6 cubic foot capacity
- Upfront temperature controls
- Two full-width adjustable glass shelves
- Two fixed gallon door shelves
- Two clear vegetable/ fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in white

HTS17HBS

HTS17GBS

Not all features available on all models.
Complete features and specifications on page 21.

HTS17BCS
- 16.6 cubic foot capacity
- Upfront temperature controls
- Factory-installed automatic icemaker
- Two full-width adjustable wire shelves
- Two fixed gallon door shelves
- Two classic white vegetable/fruit crispers
- Deluxe quiet design
- NeverClean condenser
- Available in white

HTS17BBS (not shown)
- Similar features and appearance as HTS17BCS without factory-installed icemaker.
- Available in white and bisque

HTR17BBS
- 16.6 cubic foot capacity
- Upfront temperature controls
- Recessed door handles
- Two full-width adjustable wire shelves
- Two fixed gallon door shelves
- Two classic white vegetable/fruit crispers
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in white and bisque

HTS17BCS

HTR17BBS

Complete features and specifications on page 21.

Top-Freezer **Refrigerators**

HTM17BBS
- Silver metallic exterior
- 16.6 cubic foot capacity
- Upfront temperature controls
- Two full-width adjustable wire shelves
- Two fixed gallon door shelves
- Two classic white vegetable/fruit crispers
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean™ condenser

HTS16BBS
- 15.7 cubic foot capacity
- Upfront temperature controls
- Two full-width adjustable wire shelves
- Two fixed gallon door shelves
- Two classic white vegetable/ fruit crispers
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in white and bisque

HTH16BBS (not shown)
- Similar features and appearance as HTS16BBS except ENERGY STAR®-qualified.
- Available in white and bisque

HTM17BBS

HTS16BBS

Complete features and specifications on page 21.

Recessed handles
Color-matched recessed door handles reflect the latest in European design and appearance.

HTR16BBS
- 15.7 cubic foot capacity
- Upfront temperature controls
- Recessed handles
- Two full-width adjustable wire shelves
- Two fixed gallon door shelves
- Two classic white vegetable/fruit crispers
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in white and bisque

HTR16ABS
- 15.6 cubic foot capacity
- Upfront temperature controls
- Recessed handles
- Two full-width adjustable wire cabinet shelves
- Two fixed gallon door shelves
- One full-width white vegetable/fruit crisper
- Equipped for optional automatic icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in white and bisque

HTR16BBS

HTR16ABS

Not all features available on all models.
Complete features and specifications on page 21.

GE® Top-Freezer **Refrigerators**

GTS12BBP
- 11.9 cubic foot capacity
- Two full-width, adjustable wire cabinet shelves
- Two full-width and one half fixed door shelves
- One full-width, white vegetable/fruit crisper
- Equipped for optional automatic icemaker
- Available in white and bisque

GTR11AAP
- 11.4 cubic foot capacity
- Two full-width wire cabinet shelves
- One full-width white vegetable/fruit crisper
- One wire full-width freezer shelf
- Available in white

GTS12BBP

GTR11AAP

Complete features and specifications on page 21.

GMR06AAP
- 6.0 cubic foot capacity
- Two wire cabinet shelves, one adjustable
- One full-width, two half-width door shelves
- Can rack
- Built-in or free-standing capability
- Color-matched visor handle
- Available in white and black

GMR04HAS (not shown)
- 4.3 cubic foot capacity
- Two full-width, one half-width glass cabinet shelves
- One full-width, two half-width door shelves
- Can rack
- Available in stainless

GMR04AAM
- 4.4 cubic foot capacity
- Two full-width, one half-width wire cabinet shelves
- Two full-width, one half-width door shelves
- Can rack
- Available in white and black

GMR02BAN
- 1.7 cubic foot capacity
- One fixed wire cabinet shelf
- One full-width, one half-width door shelves
- Available in white and black

GMR06AAP

GMR04AAM

GMR02BAN

Complete features and specifications on page 22.

GE® Upright **Freezers**

Lock provides security.

FUF20DP
- 20.3 cu. ft. capacity
- Five cabinet shelves, three adjustable
- One slide-out bulk storage basket
- Six door shelves
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUF17DP (not shown)
- 16.7 cu. ft. capacity
- Four cabinet shelves, three adjustable
- One slide-out bulk storage basket
- Five door shelves
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUF14DP (not shown)
- 13.7 cu. ft. capacity
- Three cabinet shelves, two adjustable
- One slide-out bulk storage basket
- Five door shelves
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUM21DR
- 20.6 cu. ft. capacity
- Five cabinet shelves, one adjustable
- One slide-out bulk storage basket
- Six door shelves
- Defrost water drain
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUM17DR (not shown)
- 17.1 cu. ft. capacity
- Four cabinet shelves, one adjustable
- One slide-out bulk storage basket
- Five door shelves
- Defrost water drain
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUM14DR (not shown)
- 14.1 cu. ft. capacity
- Four cabinet shelves, one adjustable
- One slide-out bulk storage basket
- Five door shelves
- Defrost water drain
- Adjustable temperature control
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FUM14SR (not shown)
- 14.1 cu. ft. capacity
- Three cabinet shelves
- Five door shelves
- Defrost water drain
- Adjustable temperature control
- Limited food loss warranty*
- Available in white

FUM5SN (not shown)
- 5.0 cu. ft. capacity
- Two cabinet shelves
- Three door shelves
- Adjustable temperature control
- Limited food loss warranty*
- Available in white

FUF20DP

FUM21DR

*See written warranty for complete details.

Not all features available on all models.

Complete features and specifications on page 23.

Bulk storage baskets lift out and slide from side-to-side for fast, easy loading and unloading.

FCM25RM
- 25.1 cu. ft. capacity
- Four lift-out and sliding bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FCM20DP (not shown)
- 19.7 cu. ft. capacity
- Three lift-out and sliding bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FCM15DP
- 14.8 cu. ft. capacity
- Two lift-out and sliding bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FCM15SP (not shown)
- 14.8 cu. ft. capacity
- One lift-out and sliding bulk storage basket
- Adjustable temperature control
- Upfront defrost drain
- Limited food loss warranty*
- Available in white

FCM9DM
- 8.8 cu. ft. capacity
- Two lift-out and sliding bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Built-in lock
- Interior light
- Limited food loss warranty*
- Available in white

FCM7DR (not shown)
- 7.0 cu. ft. capacity
- Power “ON” light
- Two slide-out bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Limited food loss warranty*
- Available in white

FCM5DR (not shown)
- 5.0 cu. ft. capacity
- Power “ON” light
- One slide-out bulk storage baskets
- Adjustable temperature control
- Upfront defrost drain
- Available in white

FCM5SM (not shown)
- 5.0 cu. ft. capacity
- One lift-out and sliding bulk storage basket
- Adjustable temperature control
- Upfront defrost drain
- Available in white

FCM25RM

FCM15DP

FCM9DM

*See written warranty for complete details.

Not all features available on all models.

Complete features and specifications on page 23.

Refrigeration **Specifications**

Side-by-Side Refrigerators	HSM25GFR	HSS25GFP
Capacity		
Total (cu. ft.)	25.0	25.0
Fresh food (cu. ft.)	15.44	15.44
Freezer (cu. ft.)	9.56	9.56
Shelf area (sq. ft.)	22.4	22.4
Fresh Food Features		
Upfront electronic dial temperature controls	●	●
Electronic sensors	●	●
GE SmartWater™ Filter	●	●
LightTouch! dispenser	Crushed ice, Cubes, Water	Crushed ice, Cubes, Water
Light	●	●
Cabinet shelves	3 Glass	3 Glass
(adjustable)	3	3
Vegetable/fruit crisper	2 Clear	2 Clear
Door shelves	4 (2 adj. with gallon storage)	4 (2 adj. with gallon storage)
Dairy compartment	Opaque	Opaque
Quiet Package	Deluxe	Deluxe
NeverClean™ condenser	●	●
Freezer Features		
FrostGuard™ technology	●	●
Factory-installed icemaker & bin	●	●
Wire cabinet shelves	3 (2 adj.)	3 (2 adj.)
Storage bin	●	●
Door shelves	5 Fixed	5 Fixed
Interior light	●	●
Appearance		
Color(s) available*	Silver Metallic	WW
Deluxe door handles	Black	Color-Matched short
Textured steel door and case	Case only	●
Adjustable rollers	Front	Front
Weights & Dimensions		
Height to top of hinge (in.) A	69-3/4	69-3/4
Height to top of case (in.) B	68-3/4	68-3/4
Case depth without door (in.) C	28	28
Case depth less door handle (in.) D	31-1/4	31-1/4
Case depth with door handle (in.) E	33-9/16	33-9/16
Depth with fresh food door open 90° (in.) F	49-3/8	49-3/8
Width (in.) G	35-3/4	35-3/4
Width w/door open 90° w/door handle (in.) H	38-3/16	38-3/16
Air clearances Each side (in.)	1/8	1/8
Top (in.)	1	1
Back (in.)	1	1
Approximate shipping weight (lbs.)	344	344

*Color(s) available: WW = White on white.
Add 9/16" for water hook-up. Hook-up fits in 5/8" back air clearance when calculating installation depth.
If installed against a wall, allow clearance of 12-1/8" on 25 cu. ft. models on freezer side to remove bin.
To remove fresh food pans, remove door bins.
Clearances required to remove fresh food full-size pan without disassembling: 15" on 25 cu. ft.
Allow additional space for any necessary leveling adjustments.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-Freezer Refrigerators	HTS22GBP	HTM18IBP	HTS18GBS	HTS18CCS HTS18CBS
Capacity				
Total (cu. ft.)	21.8	17.9	18.2	18.2
Fresh food (cu. ft.)	15.47	12.89	13.89	13.89
Freezer (cu. ft.)	6.37	5.03	4.27	4.27
Shelf area (sq. ft.)	24.7	22.6	21.7	18.9 / 19.8
Features				
Upfront temperature controls	Illuminated	Illuminated	●	●
Cabinet shelves	2 Glass	3 Glass	2 Glass	2 Wire
(adjustable)	2 Full-Width	1 Full-width, 2 Split	2 Full-Width	2 Full-Width
Vegetable/fruit crisper(s)	2 Clear	2 Clear	2 Clear	2 Opaque
Snack pan	●	●	●	
Fixed door bins	2 full-width (1 with gallon storage)	2 full-width with gallon storage		
Fixed door shelves	1 split with gallon storage	1 split with gallon storage	3 full-width (2 with gallon storage)	3 full-width (2 with gallon storage)
Dairy compartment	●	●	●	●
Interior light system	Dual	Dual	Single	Single
Quiet Package–Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe
NeverClean condenser	●	●	●	●
ENERGY STAR®				
Freezer Features				
Factory-installed icemaker	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	● / Opt. (IM4A)
Ice 'N Easy trays	2	2	2	– / 2
Ice storage bin				Ice Bucket / –
Ice shelf				– / ●
Spillproof freezer floor	●	●		
Wire freezer compartment shelves	1 F/W (2 pos.)	Step	Step	
Fixed door shelves	2	2	2	2
Appearance				
Color(s) available*	WW, CC	Silver Metallic	WW	WW, CC
Door handle(s)*	CM	Black	CM	CM
Customer installed handles				
Exterior design	Rounded Doors	Rounded Doors	Square Doors	Square Doors
Reversible doors	●	●	●	●
Choose right or left door opening				●
Adjustable rollers	Front	Front	Front	Front
Weights & Dimensions				
Height to top of hinge (in.) A	67-1/2	66-5/8	67-3/8	67-3/8
Height to top of case (in.) B	66-7/8	66-1/8	66-7/8	66-7/8
Height to mid-freezer (in.)	54-1/2	53-15/16	57	57
Case depth without door (in.) C	27-5/8	27-1/2	26-3/4	26-3/4
Case depth less door handle (in.) D	31-5/8	30-1/4	30-1/2	30-1/2
Case depth with door handle (in.) E	33-5/8	32-1/8	32-3/8	32-3/8
Depth w/fresh food door open 90° (in.) F	63	58-1/8	56-3/8	56-3/8
Width (in.) G	32-7/8	29-1/2	28	28
Width w/door open 90° with door handle (in.) H	35	32	30-3/4	30-3/4
Air clearances Each side (in.)	1/8	1/8	3/4	3/4
Top (in.)	1	1	1	1
Back (in.)	1	1	1	1
Approx. shipping weight (lbs.)	260	214	226	183/177

*Color(s) available: WW = White on white, CC = Bisque on bisque, CM = Color-Matched.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Side-By-Side Refrigerators

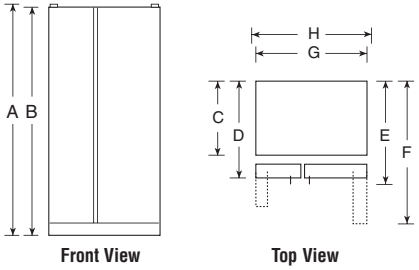

Front View **Top View**

Top-Freezer No-Frost Refrigerator

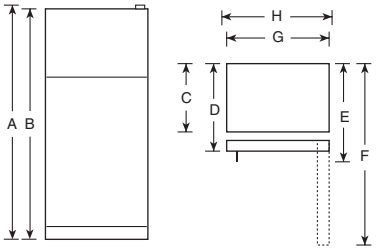

Front View **Top View**

See page 75 for warranty information.

	HTS18BCP HTS18BBP	HTS17HBS	HTS17GBS	HTM17BBS	HTS17BCS HTS17BBS	HTR17BBS	HTR16BBS	HTH16BBS	HTS16BBS	HTR16ABS	GTS12BBP	GTR11AAP
	18.0	16.6	16.6	16.6	16.6	16.6	15.7	15.7	15.7	15.6	11.9	11.4
	12.93	12.54	12.54	12.54	12.54	12.54	11.57	11.44	11.57	11.53	8.94	8.45
	5.09	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	2.95	2.99
	20.8	23.8	21.0	19.2	18.3 / 19.2	19.2	19.2	21.9	19.2	18.2	12.1	13.4
	●	●	●	●	●	●	●	●	●	●		
	2 Wire	3 Glass	2 Glass	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire
	2 Full-Width	1 Full-width, 2 Split	2 Full-Width	2 Full-width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width
	2 Opaque	2 Clear	2 Clear	2 Opaque	2 Opaque	2 Opaque	2 Opaque	2 Opaque	2 Opaque	1 FW Opaque	1 FW Divided Opaq.	1 FW Opaque
		●	●									
	3 (2 with gallon storage)	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 full-width with gallon storage	2 Full-Width, 1 Split	4
	●	●	●	●	●	●	●	●	●		●	
	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Deluxe	Single Standard	Single Standard
	●	●	●	●	●	●	●	●	●	●		
								●				
	● / Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	● / Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	
	— / 2	2	2	2	— / 2	2	2	2	2	1	1	2
	Ice Bucket / —				Ice Bucket / —							
				●	– / ●	●	●	●	●			
	●											
	Step	Step	Step									1 F/W
	2	2	2	2	2	2	2	2	2	2	2	2
	WW / WW, CC	WW, CC	WW	Silver Metallic	WW / WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW
	CM	CM	CM	Black	CM	CM Recessed	CM Recessed	CM	CM	CM Recessed	CM	CM Recessed
				●								
	Square Doors	Rounded Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Rounded Doors
	●	●	●	●	●	●	●	●	●	●	●	●
	●				●	●	●	●	●	●	●	
	Front	Front	Front	Front	Front	Front	Front	Front	Front	Front		
	66-5/8	64-3/4	64-3/4	64-3/4	64-3/4	64-3/4	61-3/4	61-3/4	61-3/4	61-3/4	60-1/2	57-7/8
	66-1/8	64-1/4	64-1/4	64-1/4	64-1/4	64-1/4	61-1/4	61-1/4	61-1/4	61-1/4	60	57-3/8
	53-15/16	54-3/8	54-3/8	54-3/8	54-3/8	54-3/8	51-3/8	51-3/8	51-3/8	51-3/8	52	50
	27-1/2	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8	27-3/4	28-1/4
	30-1/4	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8	30-5/8	30-5/8
	32-1/8	31	31	31	31	29-1/8	29-1/8	31	31	29-1/8	32-3/8	30-5/8
	58-1/8	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8	51-5/8	52-3/4
	29-1/2	28	28	28	28	28	28	28	28	28	23-3/8	23-7/8
	32	30-1/2	30-1/2	30-1/2	30-1/2	28-5/8	28-5/8	30-1/2	30-1/2	28-5/8	26-1/2	25-1/8
	1/8	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1	1
	1	1	1	1	1	1	1	1	1	1	4	4
	1	1	1	1	1	1	1	1	1	1	2	3
	206/204	183	183	169	175/169	169	165	166	166	163	170	163

Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.

All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

Listed by Underwriters Laboratories, Inc.

See page 75 for warranty information.

Refrigeration **Specifications**

GE Spacemaker® Compact Refrigerators	**GMR06AAP**	**GMR04HAS**	**GMR04AAM**	**GMR02BAN**
Capacity				
Total (cu. ft.)	6.0	4.3	4.4	1.7
Fresh food (cu. ft.)	5.51	3.89	3.99	1.49
Freezer (cu. ft.)	.49*	.42**	.39*	.16*
Shelf area (sq. ft.)	8.8	5.6	5.6	2.9
Features				
Ice 'N Easy trays	2 Mini	1 Mini	1 Mini	1 Mini
Manual defrost	●	●	●	●
Cabinet shelves	2 Wire (1 Adj.)	2 F/W, 1 Half-width glass	2 F/W, 1 Half-width wire	1 Wire
Can rack	●	●	●	
Door shelves	1 F/W, 2 Half-width	1 F/W, 2 Half-width	2 F/W, 1 Half-width wire	1 F/W, 1 Half-width
Interior light	●			
Economical/Quiet				
Cabinet/door insulation	Foam	Polystyrene	Polystyrene	Foam
Cabinet/door liner	HIPS	ABS	ABS	ABS
Appearance				
Color(s) available	White, Black	Stainless Steel	White, Black	White, Black
Door handles	White or Black Visor	Black Recessed	Color-Matched Recessed	Color-Matched Recessed
Rounded doors		●	●	●
Reversible doors	●			
Weights & Dimensions				
Height (in.) A	34-1/8	32-3/4	32-7/8	19-1/2
Width (in.) B	23-5/8	20-1/2	20	17-3/8
Depth with handle (in.) C	24-1/4	21	21-3/4	19
Depth with door open 90° (in.) D	45-1/2	39-7/8	40-1/8	34-3/4
Air clearances Each side (in.)	0†	1/2	1/2	1/2
Top (in.)	0	2	2	2
Back (in.)	0	2	2	2
Approx. shipping weight (lbs.)	88	79	77	51
Accessories				
Custom trim (optional)	TPK6**–Black only			

*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks.** It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

**Do not substitute TNK6 for this kit. Not compatible.

†If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.

Spacemaker™ Refrigerator

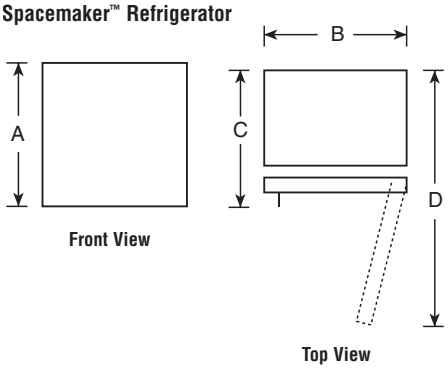

Note: Right-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.

Left-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

See page 75 for warranty information.

GE Upright Freezers	Frost-Free			Manual Defrost				
	FUF20DP	FUF17DP	FUF14DP	FUM21DR	FUM17DR	FUM14DR	FUM14SR	FUM5SN
Capacity								
Total volume (cu. ft.)	20.3	16.7	13.7	20.6	17.1	14.1	14.1	5.0
Shelf area (sq. ft.)	23.9	18.4	14.3	25.3	19.2	17.9	15.0	6.0
Features								
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Limited food loss warranty	●	●	●	●	●	●	●	●
Door shelves (total)	6	5	5	6	5	5	5	3
Defrost water drain				●	●	●	●	
Interior light	●	●	●	●	●	●		
Lock	●	●	●	●	●	●		
Cabinet shelves (total)	5 (3 Adj.)	4 (3 Adj.)	3 (2 Adj.)	5 (1 Adj.)	4 (1 Adj.)	4 (1 Adj.)	3	2
Slide-out bulk storage basket	1	1	1	1	1	1		
Economical/Quiet								
Defrost	Frost-Free	Frost-Free	Frost-Free	Manual	Manual	Manual	Manual	Manual
Magnetic door gasket	●	●	●	●	●	●	●	●
Cabinet liner	Baked enamel-on-	Baked	Baked	Baked	Baked	Baked	Baked	Baked
Wrap-around condenser	●	●	●	●	●	●	●	●
Appearance								
Color available	White	White	White	White	White	White	White	White
Door handle	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed
Textured steel case/door	●	●	●	●	●	●	●	●
Weights & Dimensions								
Height (in.) A	70	64-1/2	59	70	64-1/2	59	59	33-1/2
Width (in.) B	32	32	28	32	32	28	28	21-3/8
Depth (in.) C	28-1/2	26-1/2	28-1/2	28-1/2	26-1/2	28-1/2	28-1/2	26-1/8
Depth with door open 90° (in.) D	59-1/8	57-1/8	55-1/8	59-1/8	57-1/8	55-1/8	55-1/8	45-3/4
Air clearances Each side (in.)	3	3	3	3	3	3	3	1
Top (in.)	3	3	3	3	3	3	3	4
Back (in.)	3	3	3	3	3	3	3	4
Approx. shipping weight (lbs.)	235	213	186	224	200	177	177	80

Upright Freezers

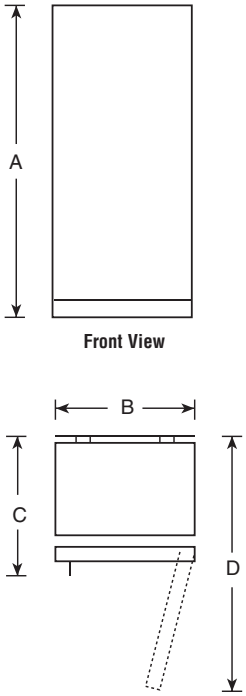

GE Upright Freezers	FCM25RM	FCM20DP	FCM15DP	FCM15SP	FCM9DM	FCM7DR	FCM5DR	FCM5SM
Capacity								
Total volume (cu. ft.)	25.1	19.7	14.8	14.8	8.8	7.0	5.0	5.0
Features								
Manual defrost	●	●	●	●	●	●	●	●
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Power "ON" light						●	●	
Wrap-around condenser	●	●	●	●	●	●	●	●
Wrap-around evaporator	●	●	●	●	●	●	●	●
Limited food loss warranty	●	●	●	●	●	●	●	
Defrost water drain	●	●	●	●	●	●	●	●
Interior light	●	●	●		●			
Lock	●	●	●		●			
Lift-out and sliding bulk storage basket(s)	4	3	2	1	2	2	1	1
Fast Freeze							●	
Economical/Quiet								
Insulation (cabinet and lid)–Foam	●	●	●	●	●	●	●	●
Cabinet liner	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Textured Aluminum	Textured Aluminum	Textured Aluminum
Appearance								
Color available	White	White	White	White	White	White	White	White
Handle	●	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed
Textured steel case and lid	●	●	●	●	●			
Weights & Dimensions								
Height (in.) A	35	35	35	35	34-1/4	31-7/8	31-7/8	33
Width (in.) B	73-7/8	61-1/4	48	48	41	37-1/4	29-3/8	29-1/8
Depth (in.) C	28-3/4	29-1/2	29-1/2	29-1/2	23-1/4	23-5/8	23-5/8	22-3/16
Height with lid open (in.) D	59-3/4	60-3/4	60-3/4	60-3/4	54-1/4	53-1/2	53-1/2	53-3/16
Air clearances Each side (in.)	3	3	3	3	3	3	3	3
Back (in.)	3	3	3	3	3	3	3	3
Approx. shipping weight (lbs.)	245	195	161	161	127	122	111	101

Chest Freezers

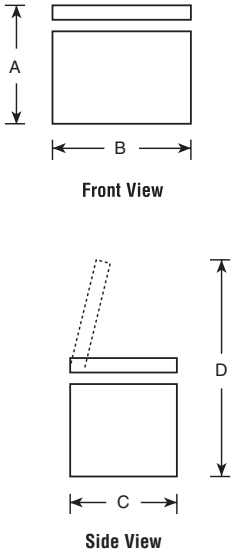

See page 75 for warranty information.

Smooth Top **Ranges**

Hotpoint® free-standing smooth top ranges provide quick cooking response. The fast, ribbon heating elements are positioned beneath the smooth cooktop and direct heat straight up to the pan. This sophisticated cooking method provides even heat for uniform cooking. Electronic oven controls provide an easy, two-step self-clean oven operation.

5.0 cu. ft. capacity
Hotpoint's smooth top ranges have an oven that is big enough to handle just about any cooking need.

Two-step self-clean
Simply latch the oven door and push the "Self-Clean" button. The oven does the rest.



Ribbon heating elements
Unlike conventional elements, the heat comes from brightly glowing ribbon elements positioned beneath the smooth fingerprint-and scratch-resistant, patterned ceramic-glass surface.

Touchpad controls
Set your oven to bake, broil, or self-clean quickly and easily—with the touch of a button.

RB800SJ

Silver metallic exterior
Unique finish complements any kitchen décor, countertop and cabinetry regardless of their color or finish.

Frameless glass oven door
The full-width frameless door is easy to clean and offers contemporary styling.

Warming drawer
Provides variable temperature control for keeping foods warm.

Electronic oven controls
Easy-to-use electronic oven controls provide:
- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.

Not all features available on all models.

Hotpoint free-standing coil ranges are perfect solutions for today's busy schedules! Self-clean ovens save you time and effort. On ranges with one-piece, upswept cooktops, a simple wipe-up does the job. White on white models are designed to complement the elegance and efficiency of today's kitchens.

5.0 cu. ft. capacity
Hotpoint's coil ranges have an oven that is big enough to handle just about any cooking possibility.

One-piece upswept cooktop
No cracks or crevices to trap dirt! The porcelain enamel-on-steel surface wipes clean easily.

Lift-up cooktop
Cooktop lifts up to allow easy clean-up of hard-to-reach spots underneath.

Plug-in surface elements
Unplug to remove drip bowls and clean in the dishwasher. Recessed areas are designed to catch spillovers and make cleaning simple.

RB757WH

Two-step self-clean
Simply latch the oven door and push the "Self-Clean" button. The oven does the rest.

Frameless glass oven door
The full-width frameless door is easy to clean and offers contemporary styling.

Calrod® surface elements
The design of the removable Calrod surface elements assures fast, clean cooking and even heat distribution.

Removable full-width storage drawer
Conveniently store cooking utensils close at hand. Drawer removes easily for cleaning underneath.

Electronic oven controls
Easy-to-use electronic oven controls provide:
- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.

Not all features available on all models.

30" Electric **Ranges**

30" Free-Standing Electric Ranges

These models feature 5.0 cu. ft. capacity self-clean ovens; electronic clock and minute timer; two oven shelves; broiler pan; lift-off oven door; interior oven light; infinite heat controls.

RB800SJ
- Silver metallic exterior
- Ceramic glass cooktop
- Ribbon heating elements
- Super-large, self-clean oven
- Warming drawer
- Big view window
- Two oven racks
- Audible preheat signal

RB800WJ
- White on white
- Ceramic glass cooktop
- Ribbon heating elements
- Super-large, self-clean oven
- Warming drawer
- Big view window
- Two oven racks
- Audible preheat signal

RB800CJ (not shown)
- Bisque on bisque
- Same features and appearance as RB800WJ.

RB800BJ (not shown)
- Black on black
- Same features and appearance as RB800WJ.

RB790SH
- Silver metallic exterior
- Ceramic glass cooktop
- Two 8" and two 6" ribbon heating elements
- Big view window
- One-piece upswept cooktop
- EasySet III oven controls

RB790WK (not shown)
- White on white
- Same features and appearance as RB790SH.

RB790BK (not shown)
- Black on black
- Same features and appearance as RB790SH.

RB787BH
- Black on black
- Smooth, easy-to-clean fingerprint- and scratch-resistant patterned ceramic-glass cooktop
- Two 8" and two 6" ribbon heating elements
- Hot surface indicator lights
- Auto oven shut-off
- Two-step self-clean
- Single oven control knob
- Frameless glass oven door with window
- Designer-style handle

RB787WH
- White on white
- Same features and appearance as RB787BH.

RB787CH (not shown)
- Bisque on bisque
- Same features and appearance as RB787BH.

RB800SJ
Ribbon Range

RB800WJ
Ribbon Range

Complete features and specifications on page 32.

RB790SH
Ribbon Range

RB787BH
Ribbon Range

RB787WH
Ribbon Range

Complete features and specifications on page 32.

30" Electric **Ranges**

30" Free-Standing Electric Ranges

These models feature 5.0 cu. ft. capacity self-clean ovens; electronic clock and minute timer; two oven shelves; broiler pan; lift-off oven door; interior oven light; infinite heat controls; removable, full-width storage drawer.

RB757WH
- White on white
- Porcelain-enameled upswept cooktop
- Auto oven shut-off
- Two-step self-clean
- Two 8" and two 6" plug-in Calrod® heating elements with removable one-piece chrome drip bowls
- Lift-up cooktop
- Frameless glass oven door with window
- Designer-style handle

RB757CH (not shown)
- Bisque on bisque
- Same features and appearance as RB757WH.

RB757EH
- Black on black
- Same features and appearance as RB757WH.

RB757BH
- White or Bisque
- Same features and appearance as RB757WH, except has black door and control panel.

RB757WH
Self-Clean Oven

RB757EH
Self-Clean Oven

Complete features and specifications on page 32.

Electronic oven controls
Easy-to-use electronic oven controls provide:
• Simple touch pad oven operation • Auto Self-Clean
• Self-clean cycling light • Preheated oven light with audible preheat signal • Auto oven shut-off • Electronic clock and timer
• Automatic oven timer • Oven "ON" light • Delay Bake option.

RB757BH
Self-Clean Oven

Complete features and specifications on page 32.

30" Electric **Ranges**

30" Free-Standing Electric Ranges

These models feature standard-clean ovens, easy-to-clean, upswept, porcelain-enameled cooktop; 5.0 cu. ft. capacity; two oven shelves; plug-in Calrod® heating elements; one-piece removable drip bowls; full-width removable storage drawer and broiler pan with grid.

RB540SH
- Silver metallic exterior
- Two 8" and two 6" plug-in Calrod® heating elements
- Big view window
- Porcelain-enameled upswept cooktop
- Black drip bowls

RB536WH
- White on white
- Electronic clock/timer
- Lift-up cooktop
- Two 8" and two 6" plug-in heating elements
- Frameless glass oven door with window
- Designer-style handle

RB526H
- White on white or Bisque on bisque
- Two 8" and two 6" plug-in heating elements
- Color-matched oven door with window
- Designer-style handle
- Electronic clock/timer

RB525BH
- White or Bisque
- One 8" and three 6" plug-in heating elements
- Frameless solid black glass oven door
- Chrome visor door handle

RB525H (not shown)
- White or Bisque
- Same features and appearance as RB525BH, except has color-matched painted oven door.

RB540SH

RB536WH

Complete features and specifications on page 32.

RB526H

RB525BH

24" Compact Electric Range

RA524W

- White
- Standard-clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Push-to-turn controls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element “ON” indicator lights
- 2 oven shelves
- Oven cycling light
- Broiler pan with grid

20" Compact Electric Range

RA520W

- White or Bisque
- Standard-clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element “ON” indicator lights
- 2 oven shelves
- Oven cycling light
- Broiler pan with grid

Complete features and specifications on page 33.

Electric Range **Specifications**

30" electric ranges	RB800SJ RB800WJ RB800CJ RB800BJ	RB790SH RB790WK RB790BK	RB787WH RB787CH RB787BH	RB757WH RB757CH RB757EH RB757BH	RB540SH	RB536WH	RB526H	RB525BH	RB525H
Features									
Self-clean oven	●	●	●	●					
Oven capacity	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Cleaning time	Variable	Variable	Variable	Variable					
Standard-clean oven					●	●	●	●	●
Oven shelves	2	2	2	2	2	2	2	2	2
Porcelain-enameled upswept cooktop	Radiant	Radiant	Radiant	Coil	Coil	Coil	Coil	Coil	Coil
Patterned cooktop	●	●	●						
Lift-up cooktop				●	●	●	●	●	●
8-inch heating elements	2 (2000W)	2 (2000W)	2 (2000W)	2	2	2	2	1	1
6-inch heating elements	2 (1500W)	2 (1500W)	2 (1500W)	2	2	2	2	3	3
Ribbon heating elements	●	●	●						
Plug-in Calrod® heating elements				●	●	●	●	●	●
Removable one-piece drip bowls				Chrome	Black	Chrome	Chrome	Chrome	Chrome
Electronic oven control	Easy Set III	Easy Set III	Easy Set III	Easy Set III					
Electronic clock and minute timer	●	●	●	●	●	●	●		
Electronic automatic oven timer	●	●	●	●					
Oven temperature display	●	●	●	●					
Auto oven shut-off	w/override	w/override	w/override	w/override					
Audible preheat signal	●	●	●	●					
Hot surface indicator lights	●	●	●						
Heating element "ON" indicator lights	●	●	●	●	●	●	●	●	●
Oven cycling light	●	●	●	●	●	●	●	●	●
Interior oven light	Control	Control	Control	Control	Switch	Switch	Switch		
Self-clean cool down time display	●	●	●	●					
Auto self-clean	●	●	●	●					
Delay Clean option	●	●	●	●					
Delay start	●	●	●	●					
Broiler pan	●	●	●	●	●	●	●	●	●
Warming drawer with handle	●								
Appearance									
Color appearance*	SA WW CC BB	SA WW BB	WW CC BB	WW CC BB WH/CT	SA	WW	WW/CC	WH/CT	WH/CT
Oven door with window	Big view	Big view	●	●	Big view	●	●		
Door handle	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Visor	Visor
Lift-off oven door	Silver Metallic White Bisque Black	Silver Metallic White Glass Black Glass	White Glass Bisque Glass Black Glass	White Glass Bisque Glass Black Glass Black Glass	Silver Metallic	White Glass	CM*	Black Glass	CM*
Full-width removable storage drawer	●	●	●	●	●	●	●	●	●
Weights and Dimensions									
Overall oven interior dimensions (W x H x D in inches)	23-3/4 x 19 x 18-1/2								
KW rating @ 240V	10.5	10.5	10.5	11.7	12.6	12.6	11.0	10.1	10.1
@ 208V	7.9	7.9	7.9	8.8	9.9	9.9	8.7	8.0	8.0
Amp rating @ 240v/208v	40	40	40	40	40	40	40	40	40
Approx. shipping weight (lbs.)	166	166	166	155	158	158	150	150	155

*SA=Silver Metallic, WW=White with white door, CC=Bisque with bisque door, BB=Black with black door, WH=White with black door, CT=Bisque with black door, CM=Oven door is color-matched to cooktop and drawer front (either White or Bisque).

30" free-standing range installation information (in inches)

*Dimensions from wall to front of closed oven door handle: 28-1/2" on models RB800/790/787/757/540/536; 28-3/8" on RB526H and RB525BH; 28" on RB525H

†The range may be placed with a 0" clearance (flush) at the back wall and side walls if the range side trims extend beyond the cabinet fronts at least 1/4". Self-Clean models only.



Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.



Listed by Underwriters Laboratories

All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

30" electric range dimensions (in inches)

Models	A Width	B Height	C* Depth	D Depth with door open
RB800SJ/WJ/CJ/BJ	29-7/8	46-1/2	26-3/8	46-3/8
RB790SH	29-7/8	46-1/2	26-3/8	46-3/8
RB787WH/CH/BH	29-7/8	46-1/2	26-3/8	46-3/8
RB757WH/EH/CH/BH	29-7/8	46-1/2	26-3/8	46-3/8
RB540SH	29-7/8	46-1/2	26-3/8	46-3/8
RB536WH/CH	29-7/8	46-1/2	26-3/8	46-3/8
RB526H	29-7/8	46-1/2	26-3/8	46-3/8
RB525BH	29-7/8	46-1/2	26-3/8	46-3/8
RB525H	29-7/8	46-1/2	26-3/8	46-3/8

*Dimensions from wall to front of closed oven door.

Note: 30" Electric Ranges conform to U.L. requirements for 0" spacing from walls below countertops. Allow 1-1/2" spacing from the side of the range to adjacent vertical walls above the cooktop surface.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

FULL ONE-YEAR WARRANTY One year from date of original purchase, we will provide free of charge, parts and service labor in your home to repair or replace any part of the appliance that fails because of a manufacturing defect. Complete details from your dealer.

See page 75 for warranty information.

24" and 20" electric ranges	24" range RA524W	20" range RA520W
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	●	●
Porcelain-enameled subtop	●	●
8-inch heating elements	1 Plug-in	1 Plug-in
6-inch heating elements	3 Plug-in	3 Plug-in
Removable drip bowls	Chrome	Chrome
Push-to-turn controls	●	●
Heating element "ON" indicator light	2	2
Oven cycling light	●	●
Broiler pan with grid	●	●
Appearance		
Color appearance*	WH	WH/CT
Porcelain-enameled oven door	Solid CM*	Solid CM*
Four leveling legs	●	●
Weights and Dimensions		
Overall oven interior dimensions (W x H x D in inches)	19 x 14 x 19	16 x 15 x 19
KW rating @ 240V	8.2	8.2
@ 208V	6.2	6.2
Approx. ship. wt. (lbs.)	145	120

*WH=White with color-matched door, CT=Bisque with color-matched door, CM=Oven door is color-matched to cooktop and drawer front.

24" free-standing range dimensions and installation information (in inches)

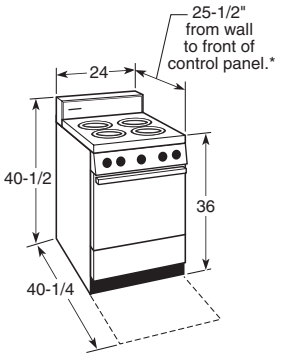

*Depth including handle 25-9/16". Depth to front of control knobs 26-1/8"

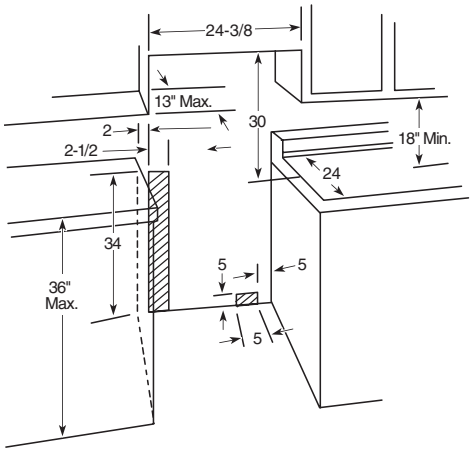

Note: 24" Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop.

20" free-standing range dimensions and installation information (in inches)

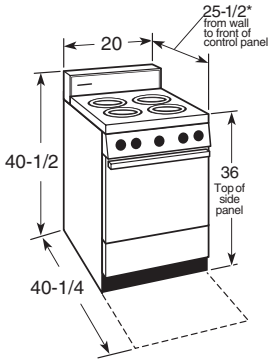

*Depth including handle 25-9/16". Depth to front of control knobs 26-1/8"

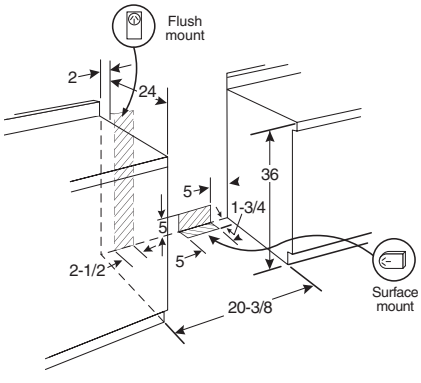

Note: Compact 20" Electric Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop.

Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawings for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Listed by Underwriters Laboratories

All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

See page 75 for warranty information.

Gas **Ranges**

Hotpoint Capacity Plus™ gas ranges feature an extra-large oven capacity and are available in self-clean or standard-clean ovens. Select models feature sealed burners that provide both simmer capability and high output, an extra-large broiler pan and grid, six embossed rack positions and porcelain-enameled upswept cooktop.

Sealed gas burners
Special burner design helps contain spills and boiling-over liquids from dripping beneath cooktop for easy clean-up.

Simmer 600 burner
Offers true simmer capability with a low (600 BTU) setting. Provides low, even heat distribution for delicate foods and sauces.

EasySet clock and oven timer
Easy-to-use electronic touch pad controls and delayed baking function make cooking simple.

Performance Plus burner
Provides high output (12,000 BTU) for faster boiling and to heat foods quickly.

RGB790SEH

Silver metallic exterior
Unique finish complements any kitchen décor, countertop and cabinetry regardless of their color or finish.

Lift-up cooktop with easy-clean subtop
Standard burner models have a cooktop that lifts up for easy access to porcelain-enameled subtop. Twin rod supports allow cooktop to lift and lock into place. Free from pipes or wires that interfere with clean-up.

Capacity Plus™ gas ranges
Extra-large capacity with a sixth embossed rack position increases cooking flexibility.

One-piece upswept cooktop
Free from cracks or crevices that trap dirt. The porcelain enamel-on-steel surface wipes clean easily.

Not all features available on all models.

CAPACITY PLUS™ 30" Free-Standing Gas Ranges

These models feature more usable oven capacity than any other leading manufacturers' brand; a sixth embossed rack position; extra-large broiler pan; porcelain-enameled upswept cooktop; interior oven light and electronic pilotless ignition.

◀ **RGB790SEH**
(shown at left)
- Silver metallic exterior
- Extra-large, self-clean oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- All purpose burners

RGB745WEH
- White on white
- Extra-large, self-clean oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- In-oven broiling
- Frameless white glass oven door with window
- EasySet IV clock and oven timer
- Removable grey porcelain-enameled drip pans
- Removable storage drawer

RGB745EEH (not shown)
- Black on black
- Same features and appearance as RGB745WEH.

RGB745BEH
- White or Bisque
- Same features as RGB745WEH, except has black control panel and black glass oven door.

RGB740BEH
- White or Bisque
- Similar to RGB745, except no oven window.

RGB540SEH
- Silver metallic exterior
- Extra-large, standard-clean oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- All purpose burners

RGB745WEH
CAPACITY PLUS™

RGB745BEH
CAPACITY PLUS™

RGB740BEH
CAPACITY PLUS™

RGB540SEH
CAPACITY PLUS™

Complete features and specifications on page 38.

30" Gas **Ranges**

CAPACITY PLUS™ 30" Free-Standing Gas Ranges

These models feature an extra-large standard oven; six embossed rack positions; twin cooktop burners and lift-up cooktop.

RGB533WEH
- White on white
- Extra-large standard-clean oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Frameless glass oven door with window
- Electronic clock/timer

RGB533CEH (not shown)
- Bisque on bisque
- Same features and appearance as RGB533WEH

RGB528PEH
- White on white
- Extra-large standard-clean oven
- White porcelain-enameled oven door with window
- Electronic clock/timer
- Twin cooktop burners
- Lift-up cooktop

RGB524PEH
- White or Bisque
- Extra-large standard-clean oven
- Solid color-matched porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB524PPH
- White or Bisque
- Same features as RGB524PEH, except with standing pilot ignition system.

RGB508PEH
- White or Bisque
- Extra-large standard-clean oven
- Solid color-matched porcelain-enameled oven door
- Drop-down broiler door
- Electronic pilotless ignition

RGB508PPH
- White or Bisque
- Same features as RGB508PEH, except with standing pilot ignition system.

RGB533WEH
CAPACITY PLUS™

RGB528PEH
CAPACITY PLUS™

Complete features and specifications on page 38.

RGB524PEH/PPH
CAPACITY PLUS™

RGB508PEH/PPH
CAPACITY PLUS™

24" Compact Gas Ranges

RGA524EW/PW

RGA524EW
- White
- Standard-clean oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls
- 2 oven shelves
- Broiler drawer
- Broiler pan with grid

RGA524PW
- White
- Same features as RGA524EW, except with standing-pilot ignition system.

20" Compact Gas Ranges

RGA520EW/PW

RGA520EW
- White
- Standard-clean oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls
- 2 oven shelves
- Broiler drawer
- Broiler pan with grid

RGA520PW
- White
- Same features as RGA520EW, except with standing-pilot ignition system.

Complete features and specifications on pages 38-39.

Gas Range **Specifications**

30" *CAPACITY PLUS*™ Gas Ranges	**RGB790SEH**	**RGB745WEH RGB745EEH RGB745BEH**	**RGB740BEH**	**RGB540SEH**	**RGB533WEH RGB533CEH**	**RGB528PEH**	**RGB524PEH RGB524PPH**	**RGB508PEH RGB508PPH**
Features								
Extra-large oven	Self-Clean	Self-Clean	Self-Clean	Standard-Clean	Standard-Clean	Standard-Clean	Standard-Clean	Standard-Clean
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed	Twin	Twin	Twin
Performance Plus burner (Nat.)	(1) 12,000/ 1,000 BTU	(1) 12,000/ 1,000 BTU	(1) 12,000/ 1,000 BTU	(1) 12,000/ 1,000 BTU	(1) 12,000/ 1,000 BTU			
Simmer 600 burner (Nat.)	(1) 5,000/ 600 BTU	(1) 5,000/ 600 BTU	(1) 5,000/ 600 BTU	(1) 5,000/ 600 BTU	(1) 5,000/ 600 BTU			
All purpose sealed burners (Nat.)	(2) 9,500/ 850 BTU	(2) 9,500/ 850 BTU	(2) 9,500/ 850 BTU	(2) 9,500/ 850 BTU	(2) 9,500/ 850 BTU			
Oven controls	EasySet IV	EasySet IV	EasySet IV	Electronic Clock/Timer	Electronic Clock/Timer	Electronic Clock/Timer	Knob	Knob
Automatic oven timer	Electronic	Electronic	Electronic					
Porcelain-enameled cooktop	Upswept	Upswept	Upswept	Upswept	Upswept	Upswept	●	●
Lift-up cooktop				●		●	●	●
Easy-clean subtop				●		●	●	●
Valves (degree of turn)	270°	270°	270°	270°	270°	140°	140°	140°
Removable drip pans	Black Porc.-Enam.	Grey Porc.-Enam. Black Porc.-Enam. Black Porc.-Enam.	Black Porc.-Enam.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.
Removable square grates	Black Heavy-steel	Grey Heavy-steel Black Heavy-steel Black Heavy-steel	Black Heavy-steel	Black	Grey Taupe	Grey	Black	Black
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic Pilot	Electronic Pilot
Oven shelves	2	2	2	2	2	2	2	2
Six embossed rack positions	●	●	●	●	●	●	●	●
Interior oven light	●	●	●	●	●	●		
In-oven broiling	●	●	●					
Slide-out broiler drawer				●	●	●	●	Drop down door
Removable storage drawer	●	●	●					
Appearance								
Color appearance*	Silver Metallic	WW BB WH/CT	WH/CT	Silver Metallic	WW CC	WW	WH/CT WH/CT	WH/CT WH/CT
Frameless oven door	Silver Metallic	White Glass Black Glass Black Glass	Black Glass	Silver Metallic	White Glass Bisque Glass	White Porc.-Enam.	Solid CM Porc.-Enam.	Solid CM Porc.-Enam.
Oven door with window	Big view	●		Big view	●	●		
Handle style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Visor	Visor	Visor
Removable oven door	●	●	●	●	●	●	●	●
Weights and Dimensions								
Overall oven interior dimensions (WxHxD in inches)	24x18.5x19							
Approx. shipping weight (lbs.)	210	210	210	185	185	165	147	166
Power/Ratings								
Gas range electrical rating†	120V, 60 Hz, 5A							
Top burners†† (000's BTU) NAT/LP	(1)-12.0/11.0 (1)-5.0/5.0 (2)-9.5/9.5					9.1/8.0		
Oven/broiler burners†† (000's BTU)	16.0/16.0 - Oven 12.5/12.0 - Broil			18.0/16.5				
Accessories								
LP conversion kit	●	●	●	●	●	●	●	●

*WW=White with white door, CC=Bisque with bisque door, WH=White with black door, CT=Bisque with black door, CM=Indicates color of oven door matches range cooktop (either White or Bisque).
†Electrical rating not applicable to standing pilot models RGB524PPH/RGB508PPH
††Factory set for natural gas.



30" gas range dimensions (in inches)

Models	B Height	C* Depth	D Depth with door open
RGB790SEH	46-1/2	26-1/4	46-3/8
RGB745WEH/EEH/BEH	46-1/2	26-1/4	46-3/8
RGB740BEH	46-1/2	26-1/4	46-3/8
RGB540SEH	46-1/2	26-1/4	46-3/8
RGB533WEH/CEH	46-1/2	26-1/4	46-3/8
RGB528PEH	46-1/2	26-1/2	46-3/8
RGB524PEH/PPH	44	26-1/2	46-3/8
RGB508PEH/PPH	39-7/8	26-1/2	46-3/8

*Depth from wall to front of closed oven door.

30" gas range installation information (in inches)

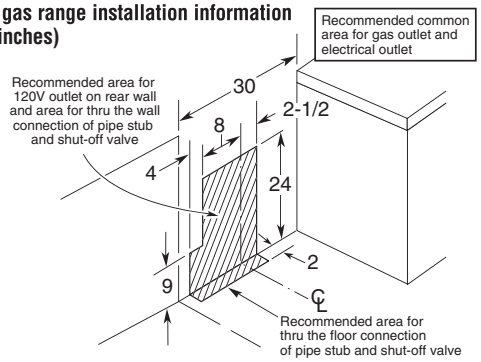

All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Optional gas range accessory drip pans
(Available at additional cost)
To order these accessory drip pans, call toll-free 800-626-2002.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

See page 75 for warranty information.

24" and 20" Gas Ranges	24" range RGA524EW/PW	20" range RGA520EW/PW
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	●	●
Porcelain-enameled subtop	●	●
Round grates	●	●
Ignition system	Electronic/Pilot	Electronic/Pilot
Push-to-turn controls	●	●
Broiler pan with grid	●	●
Separate broiler drawer (with tip down door)	●	●
Appearance		
Color appearance*	WH	WH
Porcelain-enameled oven door	Solid color-matched	Solid color-matched
Removable oven door	●	
Four leveling legs	●	●
Weights and Dimensions		
Overall oven interior dimensions (WxHxD in inches)	19 x 14 x 19	14-7/8 x 16 x 19-1/2
Burner BTU: Top (Nat/LP)	9,000/8,000	9,000/8,000
Oven (Nat/LP)	18,000/18,000	18,000/18,000
Gas range electrical rating**	120V, 60 Hz, 5A	120V, 60 Hz, 5A
Approx. ship. wt. (lbs.)	140	124

*WH=White with color-matched door
Factory set for natural gas. Can be converted to LP by a qualified technician.
**Electrical rating not applicable to standing pilot model RGA624PF and RGA620PF.

24" gas range dimensions and installation information (in inches)

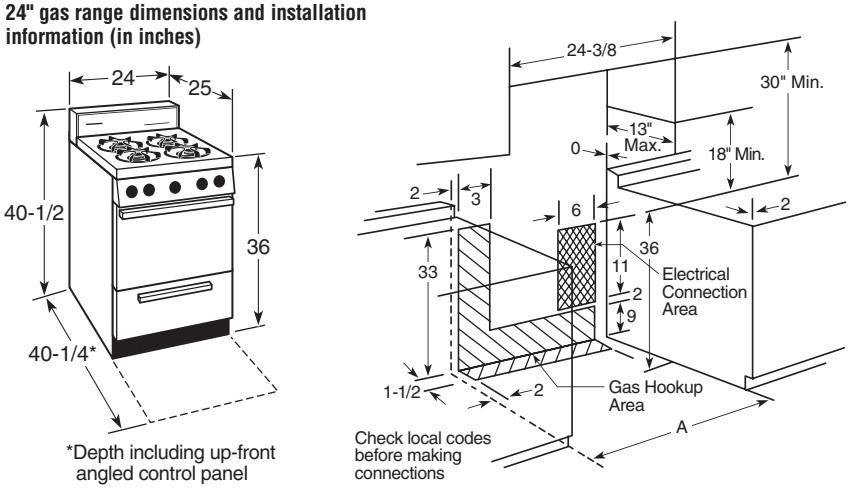

20" gas range dimensions and installation information (in inches)

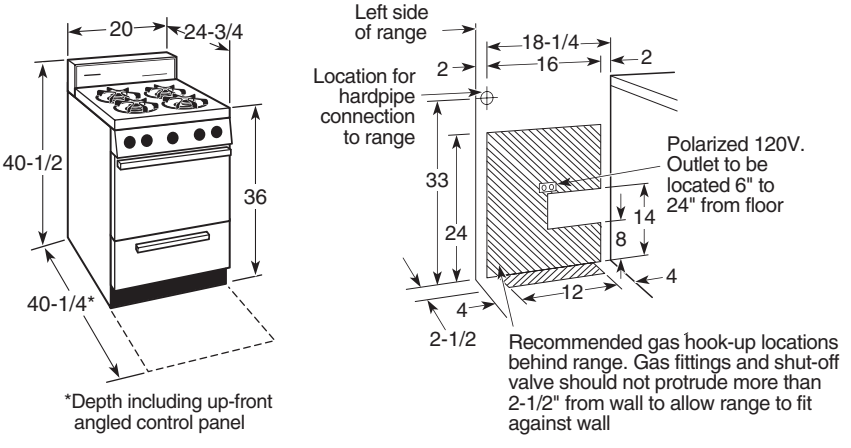

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

See page 75 for warranty information.

Hoods

Hotpoint Standard Hoods

RN328H

RN328H
- 30" width
- Silver metallic exterior
- Non-vented
- Variable two-speed fan control
- Cooktop light
- Removable grease filter

JV666H
- 36" width
- Stainless steel
- Four-speed fan control
- Two halogen cooktop lights (50 watts each)
- Night-light setting
- Vertical (round 410 CFM, rectangular 380 CFM) or rear (390 CFM) exhaust
- 3-1/4" x 10" rectangular duct (convertible to 7" round duct)

JV665H (not shown)
- Same features and appearance as JV666H except available in White on white, Bisque on bisque or Black on black.

GE Profile™—High-Performance Hoods

JV666H

JV635H

JV635H
- 30" width
- Black on black (shown), Bisque on bisque or White on white
- Four-speed fan control
- Two halogen cooktop lights (50 watts each)
- Night-light setting
- Vertical (round 410 CFM, rectangular (380 CFM) or rear (390 CFM) exhaust

JV636H (not shown)
- Same features and appearance as JV635H except Stainless steel.

JV565H
- 36" width
- White on white (shown), Bisque on bisque or Black on black
- Two-speed fan control
- Vertical (round 250 CFM, rectangular 240 CFM) or rear (240 CFM) exhaust)
- Two halogen cooktop lights (50 watts each)
- Convertible exhaust options (7" round, rectangular or non-vented)
- Rectangular damper included

GE Deluxe Hoods

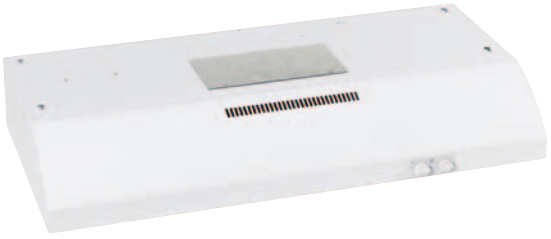

JV367H

GE Profile—Performance Hoods

JV565H

GE Standard Hoods

JV338H

JV566H (not shown)
- 36" width
- Same features and appearance as JV565H except Stainless steel

JV535H (not shown)
- 30" width.
- Same features and appearance as JV565H except available in White on white, Bisque on bisque, or Black on black

JV536H (not shown)
- 30" width
- Stainless steel

JV367H
- 36" width
- White on white (shown), Bisque on bisque or Black on black
- Rotary control
- Three-speed fan
- Convertible exhaust (shipped in non-vented configuration, convertible to 7" round or rectangular exhaust)
- Rectangular damper included

JV347H (not shown)
- 30" width
- White on white, Bisque on bisque or Black on black

JV338H
- 30" width
- White on white, Bisque on bisque or Black on black
- Round and rectangular ducting
- Rectangular damper included
- Variable two-speed fan control
- Cooktop light

JN327H (not shown)
- 30" width
- White on white, Bisque on bisque or Black on black
- Non-vented
- Variable two-speed fan control
- Cooktop light

JXDA22 round damper accessory, available at additional cost (Models JV666/665/636/635/566/565/536/535/367/347/338).

JXHC1 cord kit allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.

Light bulbs not included

Complete features and specifications on page 41.

Hood **Specifications**

	Width	Hotpoint	GE Profile						GE		
		Standard	High-Performance				Performance		Deluxe	Standard	
	30"	RN328H			JV636H	JV635H	JV536H	JV535H	JV347H	JV338H	JN327H
Hoods	36"		JV666H	JV665H			JV566H	JV565H	JV367H		
Features											
Two-speed fan control		●					●	●		●	●
Three-speed fan control									●		
Four-speed fan control			●	●	●	●					
Damper included (rectangular)			●	●	●	●	●	●	●	●	
Optional damper accessory (round)		JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22		
CFM/Sone rating: Back rectangular			390/7.5	390/7.5	390/7.5	390/7.5	240/4.5	240/4.5	180/7.0	160/7.0	
Top round			410/7.0	410/7.0	410/7.0	410/7.0	250/4.5	250/4.5	200/6.0	170/5.5	
Top rectangular			380/7.5	380/7.5	380/7.5	380/7.5	240/5.0	240/5.0	200/6.0	170/5.5	
Removable grease filters		Disposable 1-Pc. Filter†††	2†	2†	2†	2†	2††	2††	Disposable 1-Pc. Filter†††	1†††	Disposable 1-Pc. Filter†††
Filter size (sq. in.)		90	207	207	171	171	171/207	171/207	90	90	90
Cooktop light(s)*		1	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	1	1	1
Night light position on light switch		●	●	●	●	●	●				
3-1/4" x 10" rectangular duct			●	●	●	●	●	●	●	●	
7" round duct			●	●	●	●	●	●	●	●	
Non-vented		●					●	●			●
Appearance											
Color appearance**		Silver Metallic	SS	WW/CC/BB	SS	WW/CC/BB	SS	WW/CC/BB	WW/CC/BB	WW/CC/BB	WW/CC/BB
Weights & Dimensions											
Approx. shipping weight (lbs.)		19	35	35	30	30	30	30	20	17	19
Power/Ratings											
Current rating amps @ 120V		2.5	2.5	2.5	2.5	2.5	1.4	1.4	2.5	2.5	2.5

*Light bulbs not furnished.
**SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
†WB02X11011 (30") or WB02X11012 (36") removable charcoal filter is available for additional cost. (Models JV666, 665, 636, 635).
††WB02X10707 (30") or WB02X10708 (36") removable charcoal filter is available for additional cost. (Models JV566, 565, 536, 535).
†††WB2X8391 replacement grease filter and WB02X10700 replacement charcoal filter are available for additional cost. (Models JV367/347/338, JN327 and RN328).
Call toll-free 800.626.2002

Dimensions (in inches)

Model	A	B	C	D
RN328	5-1/2	29-7/8	17-1/2	12
JV666/JV665	4-3/4	35-7/8	20	12
JV636/JV635	4-3/4	29-7/8	20	12
JV536/JV535	4-3/4	29-7/8	20	12
JV566/JV565	4-3/4	35-7/8	20	12
JN327	5-1/2	29-7/8	17-1/2	12
JV338	5-1/2	29-7/8	17-1/2	12
JV347	5-1/2	29-7/8	17-1/2	12
JV367	5-1/2	35-7/8	17-1/2	12

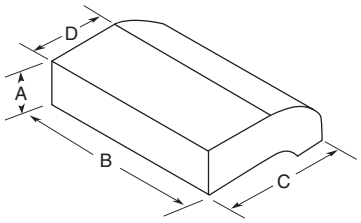

JXHC1 Cord Kit

Allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.

Hood Dimensions (in inches)

1 Models JV666H, JV665H, JV636H, JV635H,JV536H, JV535H, JV566H and JV565H

Exhaust outlet connects to 3-1/4" x 10" duct (vertically or horizontally) and 7" round (vertically). Includes rectangular damper and 7" round damper adapter.

Round damper accessory, JXDA22 available at additional cost.

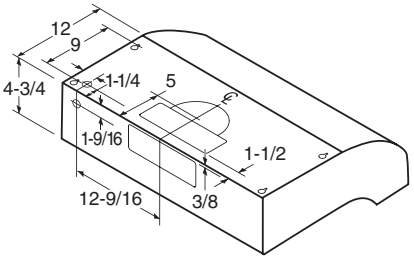

2 Models JV367H* JV347H and JV338H

*JV367H, JV347H and JV338H—Refer to this drawing for rectangular exhaust option. Refer to drawing 3 for round exhaust option.

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

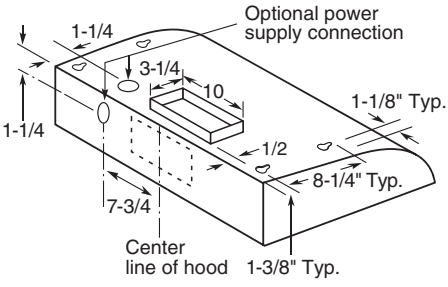

3 Models JV367H, JV347H and JV338H*

*JV367H, JV347H and JV338H—Refer to this drawing for round exhaust option. Refer to drawing 2 for rectangular exhaust option. Exhaust outlet connects to 7" diameter duct. Vent top only.

Round damper accessory, JXDA22, available at additional cost.

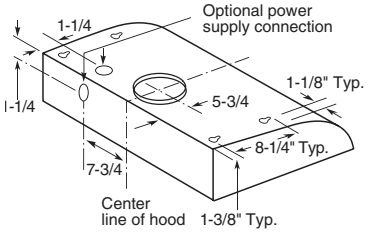

4 Model JN327H and RN328H

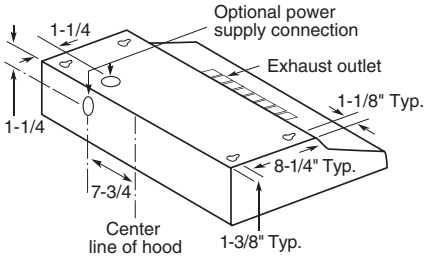

(Models JV347, JV367, and JV338 only)

Listed by Underwriters Laboratories

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

See page 75 for warranty information.

Counter Saver Plus™ **Microwave Ovens**

Installed over your range, a Counter Saver Plus microwave oven keeps your counter clear, while keeping up with the demands of your busy lifestyle. It has all the convenience features you need to quickly heat, reheat and defrost everyday foods, along with a built-in venting system, high-capacity exhaust fan and full-view cooktop lighting.

Auto Defrost
Automatically sets defrosting time and power level for fast defrosting.

Reheat
Offers the flexibility of automatically reheating a variety of popular foods.

Popcorn
Maximizes popping without scorching pre-packaged popcorn.

Turntable
Continually rotates food to ensure even cooking.

RVM1635SK
- 1.6 cu. ft. cavity
- 1000 watts*
- Silver metallic

RVM1635BK
- Black on black (not shown)

RVM1635WK
- White on white (not shown)

RVM1435WK
- 1.4 cu. ft. cavity
- 950 watts*
- White on white

RVM1435BK
- Black on black (not shown)

Microwave Oven with Convenience Cooking

Countertop Microwave Oven

REM25SJ
- Silver metallic exterior
- 1.0 cu. ft. capacity—800 watts*
- Convenience cooking controls
- Auto and Time Defrost
- Optional hanging kit included
- Child lock out
- Add 30 seconds

*IEC-705 Test Procedure

Not all features available on all models.
Complete features and specifications on page 44.

GE® Microwave Ovens with Convenience Cooking

These models feature Convenience cooking controls; Turntable; Auto/Time Defrost; Electronic touch controls; Electronic digital display with clock; Express Cook; Child lockout; Optional undercabinet mounting kit†

GE Spacemaker II™ Oven

JEM25WF
- White on white
- Mid-size 1.0 cu. ft. cavity
- 800 watts*
- Turntable on/off
- Optional trim kit**

JEM25BF Black on black (not shown)

GE Convenience Oven

JE740WK
- White on white
- Compact .7 cu. ft. cavity
- 700 watts*
- Optional trim kit**

JE740BK Black on black (not shown)

*IEC-705 Test Procedure
**Optional trim kit—Custom Trim Kits available in both 27" and 30" configurations at an additional cost.
†Optional undercabinet mounting kit available at an additional cost.

Complete features and specifications on page 45.

GE Microwave Oven Trim and Hanging Kits

Built-In Trim Kit for 1.0 cu. ft. Microwave Ovens

For a custom built-in appearance, this kit allows built-in installation of the Spacemaker® II microwave oven into a wall or cabinet alone.

Trim Kits for Model JEM25
JX827WN—White
JX827BN—Black

Hanging Kit for .7 and 1.0 cu. ft. Microwave Ovens

This hanging kit allows installation under a cabinet, freeing up valuable counter space. A mounting template provides all the necessary measurements for installation on practically any wood or metal cabinet.

Hanging Kit for Models JE740, JEM25, REM25
Part. No. JXA019K

Microwave Oven **Specifications**

Counter Saver Plus™ microwave oven	**RVM1635SK RVM1635WK RVM1635BK**	**RVM1435WK RVM1435BK**
Capacity		
Oven cavity (cu. ft.)	1.6	1.4
Features		
Watts (IEC-705 Test Procedure)	1000	950
Power levels	10	10
Electronic touch controls	●	●
Clock	●	●
Display On/Off	●	●
Turntable	●	●
Time Cook	I & II	I & II
Auto/Time Defrost	●	●
Convenience controls	●	●
Popcorn pad	●	●
Beverage pad	●	●
Reheat pad	●	●
Express cook pads (1-6 minutes)	●	●
Instant On controls	●	●
Add 30 seconds	●	●
Kitchen timer	●	●
Cooking complete reminder	●	●
Delay Start	●	●
Child lockout	●	●
Full-View cooktop lighting	●	●
High-capacity exhaust fan	200-CFM	200-CFM
Easy-mount installation	●	●
Appearance		
Door color	Silver Metallic/White/Black	White/Black
Case color	Black/White/Black	White/Black
Weights & Dimensions		
Overall oven interior dimension WxHxD (in inches)	20 x 9-3/8 x 14-2/5	19-1/3 x 9-3/8 x 13-15/16
Approx. shipping weight (lbs.)	67	67
Power/Ratings		
Input Volt/Hertz	120/60Hz	120/60Hz
Input Amps/Watts (max)	15/1.58Kw	15/1.58Kw
Accessories		
Recirculating charcoal filter kit (optional)	JX81J	JX81J
Warranty		
Full one-year in-home warranty*	●	●
Limited four-year magnetron warranty* (5 years total)	●	●

*See written warranty for details.

Microwave oven		**REM25SJ**
Capacity		
Oven cavity (cu. ft.)		1.0
Features		
Watts (IEC-705 Test Procedure)		800
Electronic touch controls		●
Electronic digital display w/clock		●
Convenience controls	Beverage	●
	Cook	●
	Popcorn	●
	Reheat	●
	Snacks	●
Express Cook		●
Instant On controls		●
Time cook I & II		●
Add 30 Seconds		●
Auto/Time Defrost		●
Power levels		10
Turntable On/Off		●
Kitchen timer		●
Cooking complete reminder		●
Delay Start/Reminder		●
Child lockout		●
Appearance		
Color appearance		Silver Metallic
Door color		Silver Metallic
Case color		Black
Weights & Dimensions		
Approx. shipping weight. (lbs.)		40
WxHxD (in inches)	Cavity	16-1/2 x 8-1/16 x 12-15/32
	Exterior**	23-25/32 x 11-3/16 x 12-9/32
Power/Ratings		
2450 Frequency (MHz)		●
Electrical input @ 120V	Watts	1300
	Amperage	11.5
Accessory		
Cooking guide label		●
Hanging kit (Part No. JXA019K)		Included
Right-angle plug		●
Warranty		
Full one-year warranty*		In-Home
Limited four-year Magnetron warranty* (5 years total)		●

*See written warranty for details.
**Exterior dimensions: height includes feet, depth does not include handle.

Dimensions (in inches)

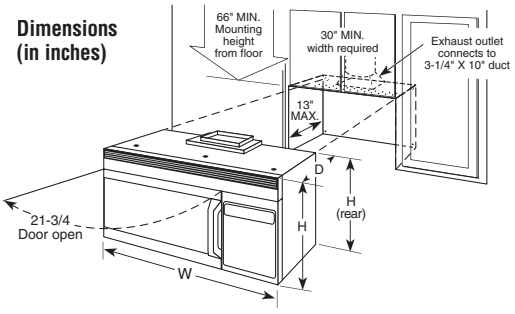

Overall Exterior Dimensions (in inches)

Model	W	D	H	H (Rear)
RVM1635	29-7/8	15-3/4	15-3/4	16-1/2
RVM1435	29-7/8	15-3/4	15-3/4	16-1/2

Important: When installing the Counter Saver Plus microwave oven over a range, allow minimum of 2" from bottom of Counter Saver Plus microwave oven to top of range backguard to allow for removal of light covers.

Optional accessories (Available at additional cost)



JX81J–Recirculating Charcoal Filter Kit
To be used when the Counter Saver Plus microwave oven cannot be vented to the outside.

Ventilation options

The Counter Saver Plus microwave oven is designed for adaptation to the following three types of ventilation:

Outside Exhaust (Vertical)

Outside Exhaust (Horizontal)

Recirculating (Non-vented ductless—Delivered from factory in the vertical exhaust position)

Note: Before installing, consult installation instructions for current dimensional data on these three types of ventilation.

Installation instructions: Before installing, consult installation instructions packed with product for current dimensional data.

See page 75 for warranty information.

Listed by Underwriters Laboratories

GE® Spacemaker II™ microwave ovens		JEM25WF JEM25BF
Capacity		
Oven cavity (cu. ft.)		1.0
Features		
Watts (IEC-705 Test Procedure)		800
Electronic touch controls		●
Electronic digital display w/clock		●
Convenience controls	Beverage	●
	Cook	●
	Popcorn	●
	Reheat	●
	Snacks	●
Express Cook		●
Instant On controls		●
Time cook I & II		●
Add 30 Seconds		●
Auto/Time Defrost		●
Power levels		10
Turntable On/Off		●
Kitchen timer		●
Cooking complete reminder		●
Delay Start/Reminder		●
Child lockout		●
Appearance		
Color appearance		White on white Black on black
Door color		White Black
Case color		White Black
Weight & Dimensions		
Approx. shipping weight. (lbs.)		40
WxHxD (in inches)	Cavity	16-1/2 x 8-1/16 x 12-15/32
	Exterior†	23-25/32 x 11-3/16 x 12-9/32
Power/Ratings		
2450 Frequency (MHz)		●
Electrical input @ 120V	Watts	1300
	Amperage	11.5
Accessory		
Cooking guide label		●
Hanging kit (Part No. JXA019K)*		Optional
Optional built-in kit		JX827WN JX827BN
Right-angle plug		●
Warranty		
Full one-year warranty**		In-Home
Limited nine-year Magnetron warranty** (10 years total)		●

*Part No. JXA019K is available at additional cost.
**See written warranty for details.
†Exterior dimensions: height includes feet, depth does not include handle.

GE microwave ovens		JE740WK JE740BK
Capacity		
Oven cavity (cu. ft.)		.7
Features		
Watts (IEC-705 Test Procedure)		700
Electronic touch controls		●
Electronic digital display w/clock (LED)		●
Convenience controls	Beverage	●
	Vegetable	●
	Popcorn	●
	Reheat	●
	Snacks	●
	Pizza	●
	Potato	●
Express Cook		●
Instant On controls		●
Time cook		I & II
Add 30 Seconds		●
Auto/Defrost		●
Power levels		10
Turntable		●
Kitchen timer		●
Delay Start/Reminder		●
Cooking complete reminder		●
Child lockout		●
Appearance		
Color appearance		White on white Black on black
Door color		White Black
Case color		White Black
Weight & Dimensions		
Approx. shipping weight. (lbs.)		27
WxHxD (in inches)	Cavity	12-3/16 x 7-13/16 x 11-9/16
	Exterior*	17-15/16 x 11-1/16 x 12-5/16
Power/Ratings		
2450 Frequency (MHz)		●
Electrical input @ 120V	Watts	1150
	Amperage	10.5
Accessory		
Cooking guide label		●
Hanging kit (Part No. JXA019K)**		Optional
Right-angle plug		●
Warranty		
Full one-year warranty†		Carry-In
Four-year magnetron warranty† (10 years total)		Nine-Year (10 years total)

*Exterior dimensions: height includes feet.
**Part No. JXA019K is available at additional cost.
†See written warranty for details.

Cut-Out Dimensions (in inches)

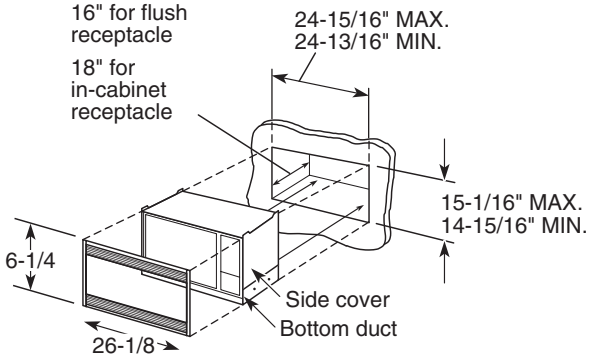

Built-In Trim Kit For 1.0 Cu. Ft. Microwave Ovens

For a custom built-in appearance, this kit allows built-in installation of the Spacemaker II microwave oven into a wall or cabinet alone, and is U.L.-approved for installation over a GE single electric wall oven. This kit should not be installed over a gas wall oven.

Trim Kits for Model JEM25

JX827WN—White, JX827BN—Black

Undercabinet Mounting Kit Part No. JXA019K For Spacemaker II and Microwave Oven Models JEM25, REM25 and JE740 (Available at additional cost)

Not to be used over a thermal oven.



Undercabinet Installation

Install Spacemaker II and microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

Installation instructions: Before installing, consult installation instructions packed with product for current dimensional data.

See page 75 for warranty information.

Dishwashers

Hotpoint dishwashers offer quality, capacity and quiet performance at an exceptional value

Hotpoint dishwashers deliver outstanding performance…quietly.
Wash performance, quiet operation and dependability make Hotpoint a great choice.

Power Wash II system
Provides three-level wash action with powerful water jets to effectively remove food soils.

CHANGE FOR THE BETTER WITH ENERGY STAR

ENERGY STAR®-qualified
Hotpoint dishwashers* are certified to exceed ENERGY STAR guidelines for energy efficiency.
*Excluding HDA1000G

Hot PreWash option
Preheats water before the main wash cycle for excellent performance time after time.

HDA3740GSA
- Silver metallic exterior
- Trimless door design
- Power Wash II system
- Hot PreWash option
- QuietDesign™ sound package
- TouchTap™ controls
- 1-5–hour Delay Start
- Super upper rack
- Deluxe lower rack

ENERGY STAR

Self-cleaning filter
Effectively traps and removes food soils. No hand-cleaning of any filter by consumer is necessary.

QuietPower™ motor
Runs quietly and efficiently to keep the kitchen peaceful.

Not all features available on all models.
Complete features and specifications on page 50.

High quality features for performance and convenience

HDA3700GBB

HDA3700GBB
- Trimless door design
- Power Wash II system
- Hot PreWash option
- QuietDesign sound package
- TouchTap controls
- 1-5–hour Delay Start
- Deluxe Plus upper rack
- Deluxe lower rack
- 6 cycles/31 options
- Pots & Pans cycle
- Heavy Wash cycle
- Water Saver cycle
- Plate Warmer cycle
- Hi-Temp Wash
- Deluxe silverware basket

HDA3700GWW White on white

HDA3400GBB

HDA3400GBB
- Trimless door design
- Power Wash II system
- Hot PreWash option
- QuietPower motor
- Pushbutton controls
- Deluxe Plus upper rack
- Deluxe lower rack
- 5 cycles/22 options
- Pots & Pans cycle
- Water Saver cycle
- Plate Warmer cycle
- Hi-Temp Wash
- Deluxe silverware basket

HDA3400GWW White on white
HDA3400GCC Bisque on bisque

HDA2000GBB

HDA2000GBB
- Trimless door design
- Deluxe lower rack
- Hot PreWash option
- QuietPower motor
- 4 cycles/9 options
- Heavy Wash cycle
- Water Saver cycle
- Rinse Only cycle
- Heated Dry
- Deluxe silverware basket

HDA2000GWW White on white
HDA2000GCC Bisque on bisque

Available for contract sales only.

HDA1000GWH

HDA1000GWH
- Trimless door design
- Deluxe lower rack
- Hot PreWash option
- QuietPower motor
- 1 cycle/4 options
- Durable tub and door liner
- Normal Wash cycle
- Heated Dry
- Deluxe silverware basket

White door with black control panel.

Complete features and specifications on page 50.

GE Spacemaker® Under-the-Sink **Dishwashers**

Installed under a single sink

Installed under a cooktop

GSM2100GWW
- White on white
- Trimless door design
- Spacemaker upper rack
- Deluxe lower rack
- Deluxe silverware basket
- QuietPower™ motor
- HotStart™ option
- 5 cycles/12 options
- Two wash levels
- Pots & Pans cycle
- Normal Wash cycle
- Short Wash cycle (on dial)
- Plate Warmer cycle (on dial)
- Rinse Only cycle (on dial)
- PermaTuf® tub

GSM2100GCC Bisque on bisque
GSM2100GBB Black on black (not shown)

Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.

GE Spacemaker 18" Built-in **Dishwasher** with **Stainless Interior**



GSM1800JBB
- Black on black
- Bright annealed stainless steel interior
- Full-length, flat door
- Nylon racks
- Removable upper rack
- China/Crystal cycle
- Pots & Pans cycle
- Heated Dry option
- 7 cycles/12 options
- Plate Warmer cycle

GSM1860JSS Stainless Steel (not shown)

GSM1800JWW White on white (not shown)

GE Nautilus™ Convertible **Dishwashers**

These models feature ENERGY STAR®-qualified; Candlelight woodgrain laminate top; PowerScrub™ wash system; QuietDesign™ sound package; Five wash levels; Piranha™ hard food disposer; Pots & Pans cycle; Normal Wash cycle; Short Wash cycle; Plate Warmer cycle; Rinse Only cycle; Heated Dry option; Hi-Temp Wash option; HotStart option; Super upper rack; Deluxe lower rack; QuietPower motor; Trimless door design.

Portable now

Built-in later

GSC3400JWW
- White on white
- TouchTap™ controls
- 1-6–hour Delay Start
- China/Crystal cycle
- 7 cycles/39 options
- Deluxe split silverware basket
- Rinse aid dispenser with indicator

GSC3400JBB Black on black (not shown)

GSC3200JBB
- Black on black
- Pushbutton controls
- 5 cycles/22 options
- Deluxe silverware basket

GSC3200JWW White on white (not shown)

Complete features and specifications on pages 51-52.

These models feature stainless steel; dual-swivel; anti-jam grinding blades; Manual reset overload protector; Removable splash guard (continuous feed models only); Drain connector kit.

GFC1020F

GFC720F

GFC530F/ GFC535F

GFC520F/ GFC525F

GFC320F/ GFC325F

GFB760F

Continuous feed disposers

GFC1020F
- Heavy-duty 1 HP motor
- 2800-RPM grinding action
- Super capacity
- QuietPower III sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement plus six-year limited warranty*

GFC720F
- Heavy-duty 3/4 HP motor
- 2700-RPM grinding action
- Super capacity
- QuietPower II sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement plus four-year limited warranty*

GFC530F
- Heavy-duty 1/2 HP motor
- 2600-RPM grinding action
- Extra-large capacity
- QuietPower I sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement plus two-year limited warranty*

GFC535F
Similar to GFC530 but has attached line cord

GFC520F
- Heavy-duty 1/2 HP motor
- 2600-RPM grinding action
- Large capacity
- Standard sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement plus one-year limited warranty*

GFC525F
Similar to GFC520 but has attached line cord

GFC320F
- 1/3 HP motor
- 1900-RPM grinding action
- Large capacity
- Standard sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement warranty*

GFC325F
Similar to GFC320 but has attached line cord

Batch feed disposer

GFB760F
- Heavy-duty 3/4 HP motor
- 2700-RPM grinding action
- Super capacity
- QuietPower II sound insulation package
- EZ-Mount installation
- Stainless steel sink flange
- Sink stopper
- One-year full replacement plus four-year limited warranty*

GE Profile™ Built-In **Compactors**

GCG1540FSS Stainless steel
- Built-in only
- 1.4 cu. ft. capacity
- 1/3-HP motor
- Removable key lock
- Toe pedal opener
- Rear wheels allow easy movement and installation
- Heavy-gauge steel construction

GCG1530FWW White on white (not shown)
GCG1550FCC Bisque on bisque (not shown)-Discontinues November 2005
GCG1520FBB Black on black (not shown)

*See written warranty for details

Complete features and specifications on page 53.

Dishwasher **Specifications**

Built-in dishwashers		ENERGY STAR® HDA3740GSA HDA3700GWW HDA3700GBB	ENERGY STAR HDA3400GWW HDA3400GCC HDA3400GBB	ENERGY STAR Contract Only HDA2000GWW HDA2000GCC HDA2000GBB	HDA1000GWH
Features					
Power Wash II system		●	●		
Self-cleaning filter		●	●		
Food disposer		●	●	●	●
Wash levels		3	3	2	2
Cycles/Options		6/31	5/22	4/9	1/4
Pots & Pans cycle		●	●		
Heavy Wash cycle		●		Dial	
Normal Wash cycle		●	●	Dial	Dial
Water Saver cycle		Dial	Dial	Dial	
Plate Warmer cycle		Dial	Dial		
Rinse Only cycle		Dial	Dial	Dial	
Delay Start		1-5–hour			
Heated Dry		●	●	Rocker	Rocker
Hi-Temp Wash		●	●		
Hot PreWash option		●	Dial	Dial	Dial
Control Type		TouchTap™ w/Dial	Pushbutton w/Dial	Dial w/Rocker	Dial w/Rocker
Touchpads		7			
Pushbuttons			6		
Cycle progress indicator		1 "cycle on"			
Rack System	Upper	Deluxe Plus	Deluxe Plus	Standard	Standard
	Lower	Deluxe	Deluxe	Deluxe	Deluxe
Silverware basket		Deluxe	Deluxe	Deluxe	Deluxe
Hard countertop installation		GPF65	GPF65	GPF65	GPF65
Rinse aid dispenser		●	●	●	●
Center throw door latch		●	●	●	●
Quiet					
Sound insulation package		QuietDesign™	Standard	Standard	
QuietPower™ motor		●	●	●	●
Appearance					
Colors available*		SA, WW, BB	WW, CC, BB	WW, CC, BB	WH
Color panels	Door	Trimless	Trimless	Trimless	Trimless
	Access	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions					
Height w/legs retracted (in.)		34	34	34	34
Overall width (in.)		24	24	24	24
Overall depth (in.)		25-3/4	25-3/4	25-3/4	25-3/4
Approx. shipping wt. (lbs.)		80	80	80	80
Accessories					
Requires kit for 1/4" panel capability (w/trim)		GPF425W/B	GPF325W/C/B	GPF325W/C/B	GPF325W
Requires kit for 3/4" panel capability (trimless)		GPF475	GPF375	GPF375	GPF375

*Colors available: SA = Silver metallic, WW = White on white, CC = Bisque on bisque, BB = Black on black, WH = White door with black control panel.

Dishwasher rough-in information (in inches)

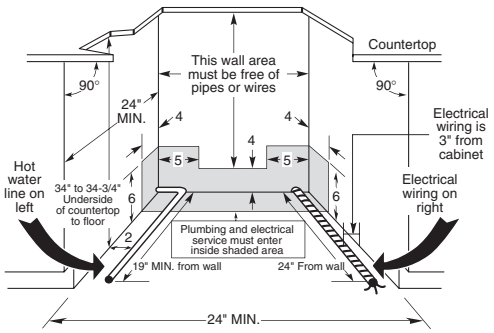

Dishwasher dimensions (in inches)

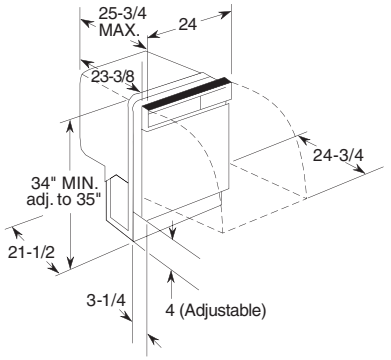

Specifications and electrical rating

120 Volts AC, 60 Hertz, 6.2 Amps total connected load 500 Watt Calrod® heater. For use on adequately wired 120 volt, 15 amp circuit having two-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Dishwasher includes drain hose and leveling legs.

Note: Before installing, consult installation instructions packed with product for current dimensional data.

Listed by Underwriters Laboratories

See page 75 for warranty information.

Dishwasher accessories

Side panel for all models:

Contains one panel and adjustable toekick for end cabinet installation of built-in model.
Does not attach to dishwasher.
Specify color: GPS5WW—White GPS5CC—Bisque

Optional dishwasher accessories:

GPF65—Brackets for under non-wood countertop installation
GPF95—Stainless sink for Spacemaker® dishwasher single bowl 21-1/4" x 25" drain hole on right; elbow and strainer included
GPF96—Stainless sink for Spacemaker dishwasher single bowl 21-1/4" x 25" drain hole on left; elbow and strainer included
GPF97—Stainless sink for Spacemaker dishwasher double bowl 21-1/4" x 33" elbow and strainer included
GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.

Wood panel capability:

Model: GSM1800J
GPF18B—1/4" panel trim kit
Models: HDA3400, HDA2000, HDA1000, GSM2100, GSC3200
GPF325W/C/B—1/4" panel trim kit (door and access)
GPF375—3/4" trimless panel trim kit (door and access [GPF100—heavy-duty spring kit included])
Models: HDA3700, GSC3400
GPF425W/C/B—1/4" panel trim (door and access)
GPF475—3/4" trimless panel kit (door and access [GPF100—heavy-duty spring kit included])

Wood insert cutout dimensions (in inches)

Kits: GPF325, GPF375, GPF425 and GPF475



Detail D
Side View GPF375/GPF475:



Kit	A	B	C	D – Panel Thickness
GPF325	18-7/8	23-9/16	3-11/16	1/4
GPF375	18-15/16	23-5/8*	4-1/4 to 3-3/4**	3/4
GPF425	19-3/4	23-9/16	3-11/16	1/4
GPF475	19-7/8	23-5/8*	3-11/16 to 4-1/4**	3/4

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)
**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Wood insert cutout dimensions (in inches)

Kits: GPF18B



Kit	A	B	Panel Thickness
GPF18B	22-3/16	17-3/16	1/4

GE® Nautilus convertible dishwashers	ENERGY STAR GSC3400JWW GSC3400JBB	ENERGY STAR GSC3200JWW GSC3200JBB
Features		
Wash system	PowerScrub™	PowerScrub
Wash levels	5	5
Water filtration	Dual	Dual
Hard food disposer	Piranha™	Piranha
Cycles	7	5
Pots & Pans	●	●
Heavy Wash	●	
Normal Wash	●	●
China/Crystal	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only	Dial	Dial
Options	39	22
Delay Start option	1-6-hour	
Heated Dry	●	●
Energy Saver	●	
Hi-Temp Wash	●	●
HotStart™	●	Dial
Racks (upper/lower)	Super/Deluxe	Super/Deluxe
Silverware basket	Deluxe split w/2 cell covers	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
TouchTap controls	8	
Pushbuttons		6
Hard countertop installation	GPF65	GPF65
Rinse aid dispenser	w/Indicator	●
Center throw door latch	●	●
Quiet		
Sound insulation package	QuietDesign	QuietDesign
PermaTuf® tub and door liner	●	●
QuietPower motor	●	●
Sealed toekick	●	●
Appearance		
Colors available*	WW, BB	WW, BB
Color panels—door & access	Trimless	Trimless
Decorative wood laminate top	Woodgrain	Woodgrain
Weights & Dimensions		
Overall height w/legs extended (in.)	36-3/8	36-3/8
Overall width (in.)	24-7/8	24-7/8
Overall depth (in.)	27	27
Approx. shipping weight (lbs.)	130	130
Accessories		
Requires kit for 1/4" panel capability with trim	GPF425W/B	GPF325W/B
Requires kit for trimless 3/4" panel capability	GPF475	GPF375

*Colors available: WW = White on white, BB = Black on black (with bisque side panels).

GE Spacemaker® 18" built-in dishwasher	ENERGY STAR GSM1860JSS GSM1800JWW GSM1800JBB
Features	
Tub and door liner	Stainless steel
Wash levels	2
Cycles	7
Pots & Pans	Dial
Heavy Wash	Dial
Normal Wash	Dial
Light Wash	Dial
China/Crystal	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	Rocker
Racking (upper/lower)	Nylon
Removable upper rack	●
Utility shelves	●
Silverware basket	Standard
Control type	Turn-to-start
Cycle progress indicator	Dial
Hard countertop installation	N/A
Rinse aid dispenser	w/adjustment
120°F inlet water capability	●
Leveling screws	●
Quiet	
Tub insulation	Standard
Appearance	
Colors available*	SS, WW, BB
Weights & Dimensions	
Height w/legs retracted (in.)	32-1/2
Overall width (in.)	18
Overall depth (in.)	22-1/2
Approx. shipping weight (lbs.)	100
Accessories	
Requires kit for 1/4" panel capability with trim	GPF18B

*Colors available: SS = Stainless steel, WW = White on white, BB = Black on black.

Figure 1

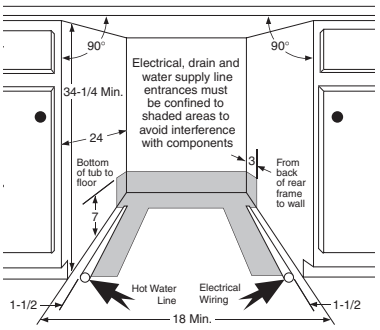

Dishwasher Rough-In Information

Figure 2



Note: Dishwasher must not be installed more than ten feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Spacemaker Built-In Dimensions GSM1800J (in inches)

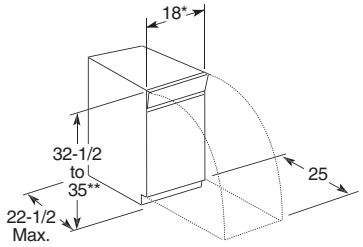

*Width adjustable from 17-5/8" to 18".
**Meets ADA countertop height requirement of 34".

Electrical rating

Voltage AC 120
Hertz 60
Total connected load amperage 9.0
Calrod heater watts 550

For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Convertible Dishwasher Dimensions (in inches)

Portable

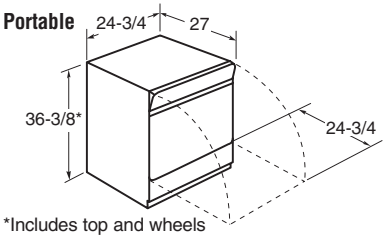

*Includes top and wheels

Built-In

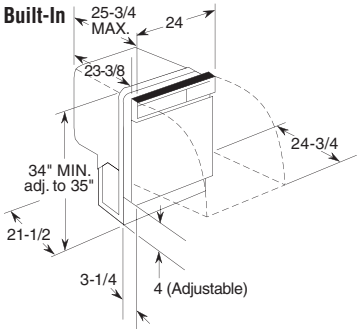

Electrical rating

Voltage AC 120
Hertz 60
Total connected load amperage 6.2
Calrod heater watts 500

For use on adequately wired 120V, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Important Note: GE kit number WD35M34 needed when adapting GE convertible dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE convertible dishwasher for under-the-counter installation.

See page 75 for warranty information.

Dishwasher **Specifications**

GE Spacemaker® under-the-sink dishwasher	ENERGY STAR® GSM2100GWW GSM2100GCC GSM2100GBB
Features	
Wash levels	2
Food disposer	●
Cycles	5
Pots & Pans	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	●
HotStart™	Dial
Racks, shelf & basket	
Upper rack	Spacemaker
Lower rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-to-start
Cycle progress indicator	Dial
Pushbuttons	4
Hard countertop installation	GPF65
Optional heavy door spring	GPF100
Rinse aid dispenser	●
Steel door	●
Center throw door latch	●
Quiet	
PermaTuf® tub and door liner	●
QuietPower™ motor	●
Appearance	
Colors available*	WW, CC, BB
Color panels—door & access	Trimless
Weights & Dimensions	
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	72
Accessories	
Requires kit for 1/4" panel capability with trim	GPF325W/C/B
Requires kit for trimless 3/4" panel capability	GPF375

*Colors available: WW = White on white, CC = Bisque on bisque, BB=Black on black.

Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.

Plumbing/Electrical Rough-In (in inches)

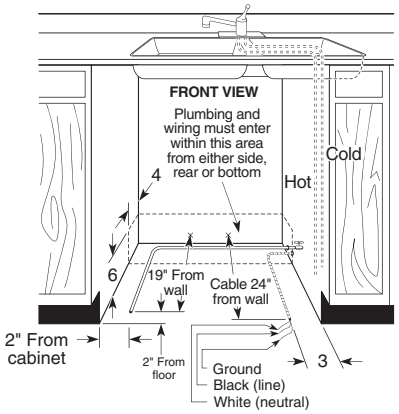

Plumbing: Hot Water Only: Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 6.2. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.

Specifications: Inlet Water Temperature Recommended: Minimum 120°F at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

See page 75 for warranty information.

Cabinet Cutout for Sink (in inches)

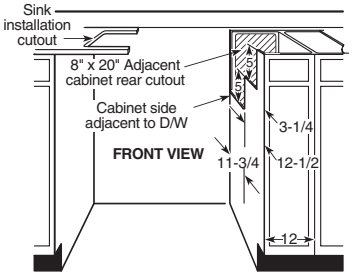

Cabinet cutouts for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

Stainless Steel Sinks Single- and Double-Bowl Models Dimensions (in inches)

Model Number	Overall Size L	Overall Size W	Inside Each Compartment L	Inside Each Compartment W	Inside Each Compartment D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners L	Cutout In Countertop 1-1/2" Radius Corners W	No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2".
Above models are fully sound deadened.
*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.
**All have four holes, but one hole has a removable plug.

Cabinet Rough-In (in inches)

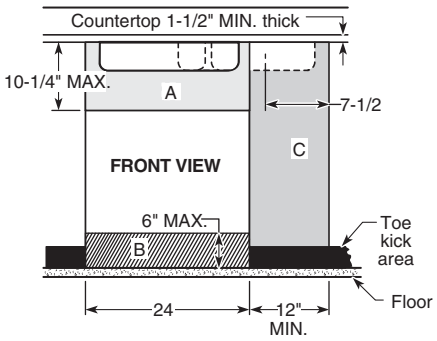

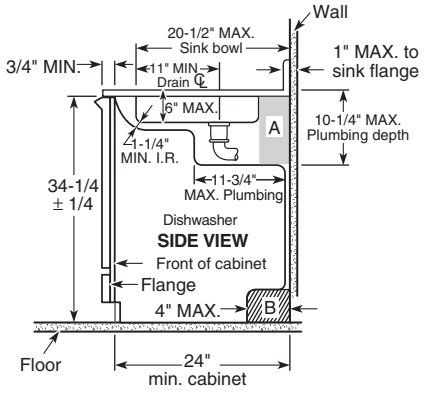

Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-In for Installation with Disposer (in inches)

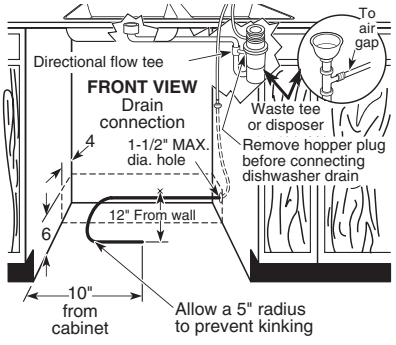

Rear View Plumbing Arrangement (in inches)

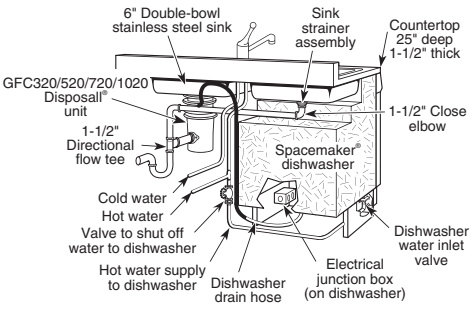

A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Disposer and Built-In Compactor **Specifications**

GE Disposall® food waste disposers	**Continuous Feed**								**Batch Feed**
	GFC1020F	**GFC720F**	**GFC530F**	**GFC535F**	**GFC520F**	**GFC525F**	**GFC320F**	**GFC325F**	**GFB760F**
Features									
Motor horsepower	1	3/4	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Wall switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct wire	Direct wire	Direct wire	Line cord	Direct wire	Line cord	Direct wire	Line cord	Direct wire
Impellers									
Dual-swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Armature shaft material	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel	Cold-rolled carbon steel
Grinding speed (RPMs)	2,800	2,700	2,600	2,600	2,600	2,600	1,900	1,900	2,700
Capacity	Super	Super	Extra-large	Extra-large	Large	Large	Large	Large	Super
Mounting type	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount
Turntable material	Stainless	Stainless	Stainless	Stainless	Galv. steel	Galv. steel	Galv. steel	Galv. steel	Stainless
Two-level precutter	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Splash guard	●	●	●	●	●	●	●	●	
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Drain elbow	●	●	●	●	●	●	●	●	●
Quiet									
Sound insulation package	QuietPower [3]	QuietPower [2]	QuietPower [1]	QuietPower [1]	Standard	Standard	Standard	Standard	QuietPower [2]
Weights & Dimensions									
Approx. shipping weight (lbs.)	14.9	12.45	9.6	9.9	8.8	9.1	8.4	8.7	13.75
Net weight (lbs.)	13.2	10.7	8.05	8.35	7.8	8.1	7.4	7.7	11
Dishwasher inlet diameter (in.)	1	1	1	1	1	1	1	1	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Power Ratings									
Volts, Hertz, Amps	120; 60; 7.0	120; 60; 6.0	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.0	120; 60; 4.0	120; 60; 6.0
Warranty*									
One-year full replacement							●	●	
One-year full replacement plus One-year limited replacement					●	●			
One-year full replacement plus Two-year limited replacement			●	●					
One-year full replacement plus Four-year limited replacement		●							●
One-year full replacement plus Six-year limited replacement	●								

*See written warranty for details.

GE Profile™ built-in compactors	**GCG1540FSS, GCG1530FWW, GCG1550FCC, GCG1520FBB**
Features	
Cycle time	27 seconds max., 14 seconds min.
Drive system	2-Point
Motor horsepower	1/3
Compression ratio (average)	75% reduction of volume
Ram force (lb.) (max.)	2,300
Front level legs and rear wheels	●
Capacity	1.4 cu. ft.
Side release bin	●
Toe/foot pedal drawer opener	●
Lock/start control w/removable key	●
Automatic anti-jam	●
Slide-out drawer	●
Appearance	
Color appearance*	SS, WW, CC, BB
Color-matched	●
Heavy-gauge steel construction	●
1/4" panel capability	●
Weights & Dimensions	
Total shipping weight (lbs.)	152
Total appliance weight (lbs.)	141
Overall height (in.)	34-1/8 to 34-1/2
Overall width (in.)	15
Overall depth (in.)	24-1/4
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4
Clearance for drop-down drawer side	6" or more on right side
Drawer extension for removal	23" or more in front of appliance
Custom panel size H x W (in.)	23-15/16 x 14-5/8
Accessories	
Compactor bags (5 included)	WC60X5017
Warranty	
Full one-year warranty**	●

*Colors available: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

**See written warranty for details.

Compactor Dimensions (in inches)



Compactor Accessories:

New 1/4" panel trim kits (color-matched)

GPF82S—Stainless steel
GPF82W—White
GPF82B—Black
Discontinues November 2005

Disposer Accessories:

Colored sink flanges
GPF76—White
GPF78—Bisque
Discontinues November 2005

See page 75 for warranty information.

Washers

Super and extra-large capacity washers

VWSR4150D
- 3.2 cu. ft. super capacity plus washer
- Variable water levels
- 15 cycles
- 4 wash/spin speed combinations
- Extra Rinse
- Auto presoaks
- GentlePower™ Agitator
- Bleach dispenser
- Fabric softener dispenser

VBSR3100D
- 3.2 cu. ft. super capacity washer
- 3 water levels
- 10 cycles
- 3 wash/spin speed combinations
- 3 wash/rinse temperature settings
- FlexCare™ Agitator
- Bleach dispenser

VVSR1070D
- 3.2 cu. ft. super capacity washer
- 3 water levels
- 7 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- FlexCare Agitator

VBXR1090D
- 2.7 cu. ft. extra-large capacity washer
- 3 water levels
- 9 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- FlexCare Agitator
- Bleach dispenser

Extra Rinse option
Ideal for those with sensitive skin, this option removes excess detergent residue from fabric fibers.

Automatic presoak cycle
This option soaks heavily soiled clothes for 15 or 30 minutes, then automatically goes into the cotton wash cycle. No need for a second trip to the washer!

GentlePower agitator
This dual-action agitator maximizes wash performance with a rotating spiral and flexible fins. The upper spiral continually circulates the wash load, pulling clothes from the top and lifting them from the bottom. The bottom fins move back and forth to provide gentle, effective cleaning action.

Delicate cycle
This extra-care setting uses gentle agitation to protect fine handwashables such as lingerie and sweaters.

VWSR4150D

VBSR3100D

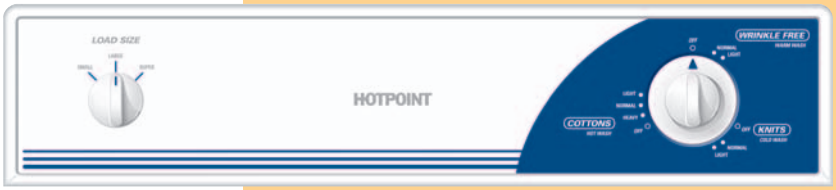

VVSR1070D

VBXR1090D

VWSR4150D

Not all features available on all models.
Complete features and specifications on page 58.

Super and extra-large capacity dryers

NWSR483EB Electric
NWSR483GB Gas
- 7.0 cu. ft. super capacity dryer
- Automatic dry control
- 8 cycles
- 4 heat selections
- Press Guard Wrinkle Care
- Upfront lint filter
- Variable end-of-cycle signal
- Dryer interior light
- Reversible door

NBXR463EB Electric
NBXR463GB Gas
- 6.0 cu. ft. extra-large capacity dryer
- Automatic dry control
- 6 cycles
- 4 heat selections
- Upfront lint filter
- Reversible door

NVLR333EE Electric
NVLR333GE Gas
- 5.8 cu. ft. extra-large capacity dryer
- Automatic dry control
- 3 cycles
- 3 heat selections
- Upfront lint filter
- Reversible door

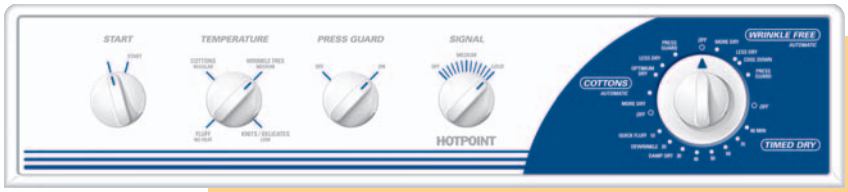

NWSR483EB (Electric), NWSR483GB (Gas)

NBXR463EB (Electric), NBXR463GB (Gas)

NVLR333EE (Electric), NVLR333GE (Gas)

Press Guard Wrinkle Care
This no-heat tumble cycle saves you the trouble of rushing to remove clothes by signaling every five minutes, for up to 20 minutes, after clothes are dry.

Variable end-of-cycle signal
Great when you're busy, this audible signal reminds you when clothes are dry. The signal volume can be adjusted according to your needs, whether your laundry room is next to the nursery or in the basement.

Automatic dry control
For each load, the dryer monitors the temperature with an automatic thermostat and ends the cycle when clothes are properly dried.

Dryer interior light
This brilliant light puts small items like socks and washcloths into clear view, making unloading faster and easier.

NWSR483EB/GB

Not all features available on all models.
Complete features and specifications on page 58.

GE Spacemaker®: **Portable/Stationary Models**



Stainless steel tub
Extra-large 2.5 cu. ft. stainless steel tub with lint filter.



Fabric softener dispenser
Easily accessible detergent/ fabric softener dispenser.

Portable/Stationary toploads washer

WSLP1100DWW (Portable)
- White on white
- 24" 2.5 cu. ft. extra-large capacity
- 120V
- Stainless steel basket
- 1 wash/spin speed
- 10 cycles
- 3 wash/rinse temperatures
- 4 water levels
- Load sensing
- Electronic controls
- Digital countdown
- Bifold lid
- Bleach dispenser
- Fabric softener dispenser
- Lint filters
- Easy-roll rollers

WSLS1100DWW (Stationary) (not shown)
- White on white
- 120V

DSDR24D shown with WSLS1100D Washer and DSKS433EB Dryer

DSDR24D
- Stack Rack White (only) (Available at additional cost)
- For use with portable or stationary Spacemaker washers and stationary dryers

Stationary dryers

DSKS433EB
- White on white or White with black controls
- 3.6 cu. ft. capacity
- 240V
- 3 drying cycles
- 4 heat selections

WMK-35 Wall-Mount Kit
(Available at additional cost, applies *only* to stationary models.)

DSKS333ECWW
- White on white
- 3.6 cu. ft. capacity
- 120V
- 3 drying cycles
- 3 heat selections
- 15-amp dryer cord attached

WMK-35 Wall-Mount Kit
(Available at additional cost, applies *only* to stationary models.)

Portable dryers

DSKP333ECWW (not shown)
- White on white
- 3.6 cu. ft. capacity
- 120V
- 3 drying cycles
- 3 heat selections
- 15-amp dryer cord attached

Not all features available on all models.
Complete features and specifications on page 59.

WSM2700D Electric
WSM2780D Gas

- White on white
  (Electric model also available in Bisque on bisque)
- Full size 27" 2.7 cu. ft. extra-large capacity washer features 3 cycles, 3 wash/rinse temperature options, 3 water level selections
- Dryer features Automatic dry control as well as 4 cycles

WSM2420D Electric
WSM2480D Gas

- White on white
  (Electric model also available in Bisque on bisque)
- 24" 1.9 cu. ft. large capacity washer features 3 cycles, 3 wash/rinse temperature options, 3 water level selections
- Dryer features Automatic dry control as well as 4 cycles

Complete features and specifications on page 60.

Washer and Dryer **Specifications**

Washers	VWSR4150D	VBSR3100D	VVSR1070D	VBXR1090D
Capacity				
Capacity cu. ft.	3.2 Super Plus	3.2 Super Plus	3.2 Super	2.7 Extra-large
Controls				
Rotary	●	●	●	●
Wash/rinse temps	3	3	3 timer	3
Water levels	Variable	3	3	3
Wash system				
Wash basket	ExtrAction™	ExtrAction	PermaTuf® II	PermaTuf II
Wash mechanism	GentlePower™ Agitator	GentlePower Agitator	FlexCare™ Agitator	FlexCare Agitator
Wash/spin combinations	4	3	1	1
Drive system				
Transmission	Steel	Steel	Steel	Steel
Maximum spin speed	630 RPM	630 RPM	630 RPM	630 RPM
Dispensers				
Bleach	●	●		●
Fabric softener	●			
Wash cycles				
Number of cycles	15	10	7	9
Cottons regular	●	●	●	●
Auto soak (30 min.)	●			
Auto soak (15 min.)	●			
Extra heavy soil		●		●
Heavy soil	●	●	●	●
Medium soil	●	●	Normal	●
Light soil	●	●	●	●
Easy care	Wrinkle free	Wrinkle free	Wrinkle free	Wrinkle free
Auto soak (15 min.)	●			
Heavy soil	●	●		●
Medium soil	●	●	Normal	●
Light soil	●	●	●	●
Extra light soil				●
Casuals-pulsed				●
Heavy soil				●
Medium soil				●
Light soil				●
Delicate	●	●	Knits	
Medium soil		●	●	
Light soil	●	●	●	
Special cycles				
2nd rinse	Cottons & easy care			
Rinse & spin (Quick rinse)	●	●		
Prewash	●			
Spin Only	●			
Additional features				
Quiet performance	Quiet-by-Design™	Quiet-by-Design™	Quiet-by-Design™	Quiet-by-Design™
Instructions/guides	Color lid instructions	Color lid instructions	Color lid instructions	Color lid instructions
Appearance				
Colors available*	WW	WW	WW	WW/CC
Weights & dimensions				
Approx. shipping weight (lbs.)	160	160	160	160
H x W x D in inches	42 x 27 x 25-1/2	42 x 27 x 25-1/2	42 x 27 x 25-1/2	42 x 27 x 25-1/2

*WW = White on white, CC = Bisque on bisque

	Electric	NWSR483EB	NBXR463EB	NVLR333EE
Dryers	Gas	NWSR483GB	NBXR463GB	NVLR333GE
Capacity				
Capacity cu. ft		7.0 Super	6.0 Extra-large	5.8 Extra-large
Controls				
Rotary		●	●	●
Heat selections		4	4	3
Dry system				
Temperature sensor		Thermostat	Thermostat	Thermostat
Dryer drum		DuraDrum™	DuraDrum™	DuraDrum™
Drum baffles		White	White	White
Signal				
End-of-cycle		Variable		
Dry cycles				
Number of cycles		8	6	3
Cottons regular				
Automatic dry cottons		●	●	●
Optional		●		
Easy care				
Automatic dry easy care		●	●	●
Wrinkle care		●		
Timed dry				
Maximum time available		80 Mins.	80 Mins.	70 Mins.
Special cycles				
Dewrinkle		●	●	
Additional features				
Quiet performance		Quiet-by-Design™	Quiet-by-Design™	Quiet-by-Design™
Dryer interior light		●		
Appearance				
Colors Available*		WW	WW	WW/CC
Weights & dimensions				
Approx. shipping weight - elect.		119	112	112
Approx. shipping weight - gas		125	115	115
H x W x D in inches		42 x 27 x 25-1/2**	42 x 27 x 25-1/2**	42 x 27 x 25-1/2**

*WW = White on white, CC = Bisque on bisque.
**24-1/2" from the edge of the side panel to the front.
25-1/2" from front to edge of endcaps.

Washer Dimensions (in inches)

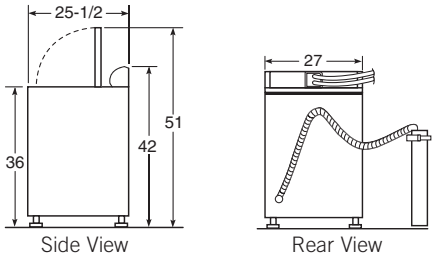

Washer specifications:
Electrical rating: 115V, 60 Hz, 10 Amps
Circuit requirements: An individual properly grounded branch circuit, with a three-prong grounding-type receptacle protected by a 15-or 20-amp circuit breaker or time-delay fuse, is required.

Washer Note: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

See page 75 for warranty information.

Dryer dimensions (in inches)

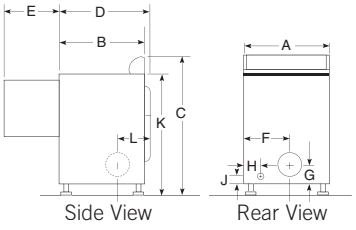

	Extra-Large 5.8 and 6.0 Capacity	Super 7.0 Capacity
A	27	27
B	25-1/2*	25-1/2*
C	42	42
D	25-3/4	28-1/4
E	23-1/2	23-1/2
F	11-1/2	11-1/2
G	3-1/2	3-1/2
H	2	2
J	2-1/2	2-1/2
K	36	36
L	5-1/4	8-1/2

*24-1/2" from the edge of the side panel to the front.
25-1/2" from front to edge of end caps.

Dryer Specifications

Exhaust Options:
Electric: 4-way via rear, right, left and bottom.
Gas: For 5.8, 6.0 and 7.0 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Power Cord Locations

5.8, 6.0 and 7.0 cu. ft. Dryers



Circuit requirements:
Electric: An individual properly grounded branch circuit protected by a 30-amp circuit breaker or time-delay fuse, is required.
Gas: An individual, properly grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse, is required.
Gas (BTU/HR): 22,000 for 5.8, 6.0 and 7.0 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 5.8, 6.0 and 7.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Electric dryer rating:
240V, 5600W, 24A, 60 Hz–5.8, 6.0, 7.0 cu. ft. dryers.
208V, 4400W, 22A, 60 Hz–5.8, 6.0, 7.0 cu. ft. dryers

Gas dryer electric rating:
120V, 60 Hz, 6A

Listed by Underwriters Laboratories

GE Spacemaker® Portable/Stationary Washers	Stationary WSLS1100D	Portable WSLP1100D
Capacity		
Capacity (cu. ft.)	2.5 Extra-Large	2.5 Extra-Large
Features		
Wash/spin speed combinations	1	1
Wash/rinse temperatures	3	3
Water levels	4	4
Number of cycles	10	10
Cycle countdown	Digital	Digital
Regular		
Heavy Soil	●	●
Medium Soil	●	●
Perm. Press		
Medium Soil	●	●
Light Soil	●	●
Easy Care		
Delicates	●	●
Spin only	●	●
One touch load sensing	●	●
Automatic cool down	●	●
Bleach dispenser	●	●
Fabric softener dispenser	●	●
Automatic detergent dispenser	●	●
Lint filter	2 Removable	2 Removable
Washer lid type	Bi-fold	Bi-fold
Quiet pump	●	●
Easy-roll rollers		●
Unicouple connector		●
Basket material	Stainless Steel	Stainless Steel
Appearance		
Colors available*	WW	WW, WH
Weights & Dimensions		
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps	
Dimensions (HxWxD in inches)**	37-1/2† x 23-5/8 x 26	38 x 23-5/8 x 26
Approx. shipping wt. (lbs.)	114	116

*Colors available: WW = White on white, WH = White with black controls.
**Depth measured from front of control knob.
†With leveling legs extended.

GE Spacemaker® Portable/Stationary Dryers	DSKS433EB	DSKP333EC* DSKS333EC
Capacity		
Capacity (cu. ft.)	3.6	3.6
Features		
Dry control	Automatic	Automatic
Heat selections	4	3 (timer)
Number of dry cycles	3	3
Auto. Perm. Press & Delicate	●	
Auto. Reg.	●	●
Timed Regular (min.)	140	150
Air Fluff (min.)	(Heat Selection)	30
Separate start switch	●	●
Control location	Mid-Band	Top Mid-Band
Lint filter	Upfront	Upfront
Appearance		
Colors available**	WW, WH	WW
Weight & Dimensions		
Exhaust options***	4-Way	4 way – Rear, Bottom, Left, Right 4 way – Rear, Top, Left, Right
Circuit requirements	240/208V†, 60 Hertz, 30 Amp	120V, 60 Hertz, 15 Amp
Power cord	No Cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	33-1/4 x 23-7/8 x 24-1/2
Wall-mount kit (available at additional cost)	WMK-35	– WMK-35
Approx. shipping wt. (lbs.)	108	108

*DSKP333EC dryer comes equipped with casters and stationary leveling legs.
**Colors available: WW = White on white, WH = White with black controls.
***DSKS433EB and DSKP333EC are shipped exhausted through the top.
†Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp) DSKS433EB and DSKS333EC approved for use with washer/dryer stack rack DSDR24D.
Circuit Requirements: An individual, properly grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

Top Vent Installation Dimensions (in inches)

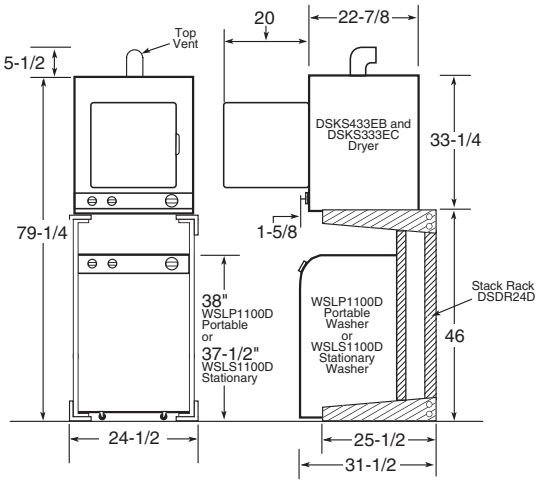

Wall-Mount Installation Dimensions (in inches)

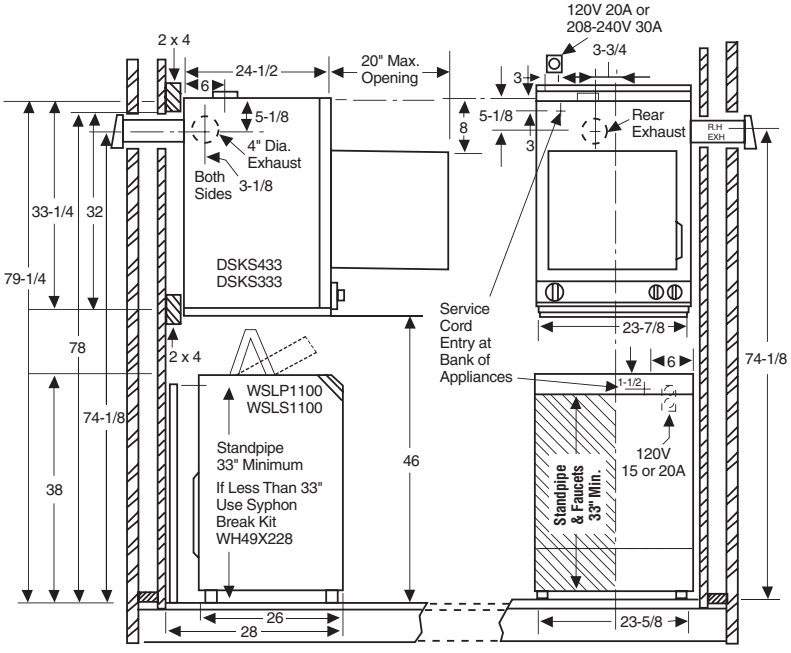

See page 75 for warranty information.

Washer and Dryer **Specifications**

GE® Unitized Spacemaker® washers and dryers

Electric / Gas	WSM2700D / WSM2780D		WSM2420D / WSM2480D	
Washer	**Washer**	**Dryer**	**Washer**	**Dryer**
Capacity				
Capacity	X-Large/2.7	X-Large/2.7	Compact/1.9	Compact/1.9
Features				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	●		●	
Perm. Press	●		●	
Delicates	●		●	
Unbalanced load control	●		●	
Lint filter	●		●	
Dryer				
Features				
Automatic dry control		●		●
Number of dry cycles		4		4
Auto Regular		●		●
Auto Perm Press				●
Delicates		●		
Timed		●		●
Air Fluff		●		●
Control location		Mid-Band		Mid-Band
Exhaust options		Rear		Rear/Sides
Appearance				
Colors available†	WW/CC WW		WW/CC WW	
Weight & Dimensions				
Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16*		71-3/4 x 23-7/8 x 27-1/4*	
Approx. shipping wt. (lbs.)	300		238	

*Depth dimension assumes water hook-up is recessed in the wall.
†WW = White on white, CC = Bisque on bisque
Note: The third prong on the WSM2780W plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

Models WSM2700D and WSM2780D Dimensions (in inches)

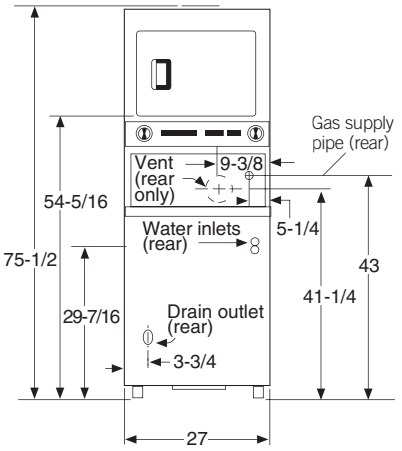

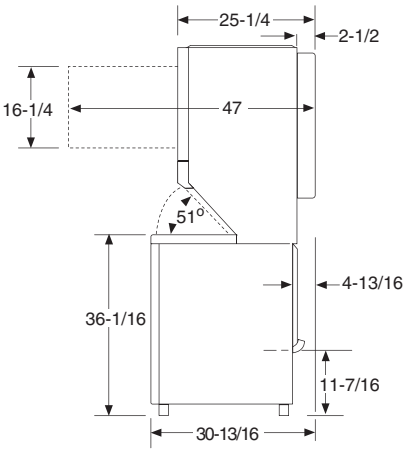

Models WSM2420D and WSM2480D Dimensions (in inches)

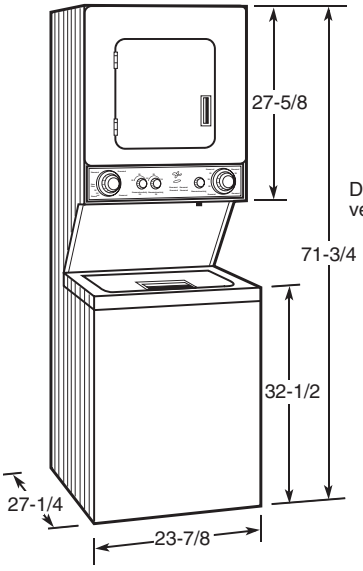

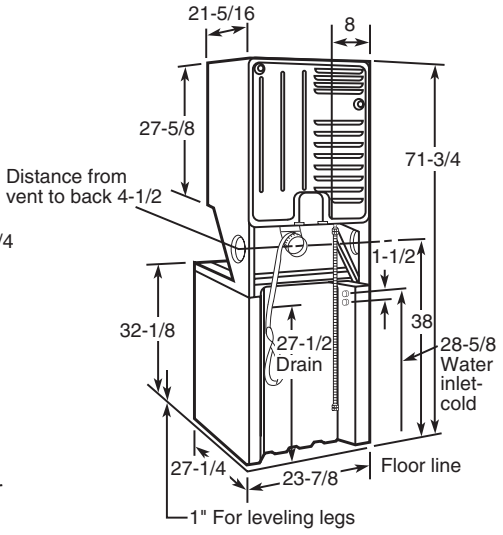

Electrical requirements

WSM2700D: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

WSM2420D: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

NOTE: THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

WSM2480D: Gas dryer—This appliance should be connected to an individual, properly-grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15 or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

Gas rated input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

WSM2780D: Gas dryer—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

WSM2780D Gas Rated input 20,000 BTU/HR. Factory equipped for natural gas.

LP gas supply requires a conversion kit.
Kits:
WSM2780D-WE25X10017
WSM2480D-WE25X0219

Have a qualified gas technician install a conversion kit before use.

Exhaust information
See “Dryer Exhausting Information” on page 61.
For complete information see installation instructions packed with the product.

See page 75 for warranty information.

Dryer exhausting information

For complete information see installation instructions packed with dryer.

Important note:
GE Kit Number 14-A018 needed when converting rear exhaust to bottom or side.
(On Extra-large (5.7) capacity models only.)

Ducting materials
For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length. The following kit or parts are available from your local service organization.
Kit WX8X75—7' aluminum duct and 4' hood, short tail.
(OR individual parts):
WX8X65 7' aluminum flex duct only
WX8X58 4' clamps (2)
WX8X67 4' exhaust hood

See installation instructions for complete information.

Exhaust length calculation:
1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.

2. The maximum length of 4' rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum lengths for flexible ducts are less than for rigid duct. See table in installation instructions. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet must be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Special installation requirements

Alcove or closet Installation:
- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outdoors. See EXHAUST INFORMATION above and installation instructions.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
  0" either side
  3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.
- No other fuel-burning appliance shall be installed in the same closet with the dryer.

Bathroom or bedroom installation:
- The dryer MUST be exhausted to the outdoors. See installation instructions.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum clearances other than alcove or closet installations
- Minimum clearances to combustible surfaces:
  0" both sides
  3" rear

For more information on venting kits and accessories, please call 1-800-GE-CARES.

Dryer Exhausting Information—Use Metal Duct Only
Vertical and Horizontal Ducting



Domestic Dryer Models	Number of 90° Turns	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct, Exhaust Hood Type **A** 4" Opening	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct, Exhaust Hood Type **B** 2-1/2" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct, Exhaust Hood Type **A** 4" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct, Exhaust Hood Type **B** 2-1/2" Opening
	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
7.0, 6.0 and 5.8	2	45 ft.	35 ft.	30 ft.	20 ft.
Capacity Models	3	35 ft.	25 ft.	20 ft.	15 ft.
all Electric Dryers	4	25 ft.	15 ft.	15 ft.	10 ft.
	0	90 ft.	60 ft.	55 ft.	45 ft.
7.0, 6.0 and 5.8	1	60 ft.	45 ft.	40 ft.	30 ft.
Capacity Models	2	45 ft.	35 ft.	30 ft.	20 ft.
all Gas Dryers3	35 ft.	25 ft.	20 ft.	15 ft.	
Spacemaker® Models					
DSKS433EB	0	46 ft.	37 ft.	30 ft.	24 ft.
DSKS333EC	1	38 ft.	30 ft.	25 ft.	20 ft.
DSKP333EC	2	31 ft.	22 ft.	20 ft.	14 ft.
WSM2780D	3	24 ft.	15 ft.	16 ft.	10 ft.
	0	56 ft.	42 ft.	30 ft.	22 ft.
	1	46 ft.	36 ft.	22 ft.	14 ft.
Spacemaker Model	2	34 ft.	28 ft.	16 ft.	10 ft.
WSM2700D	3	32 ft.	18 ft.	10 ft.	5 ft.
Spacemaker Models	0	43 ft.	36 ft.	30 ft.	24 ft.
WSM2420D	1	33 ft.	26 ft.	24 ft.	18 ft.
WSM2480D	2	23 ft.	16 ft.	16 ft.	10 ft.

Listed by Underwriters Laboratories

See page 75 for warranty information.

GE® Air Conditioning

GE ENERGY STAR®-Qualified Electronic Room Air Conditioners

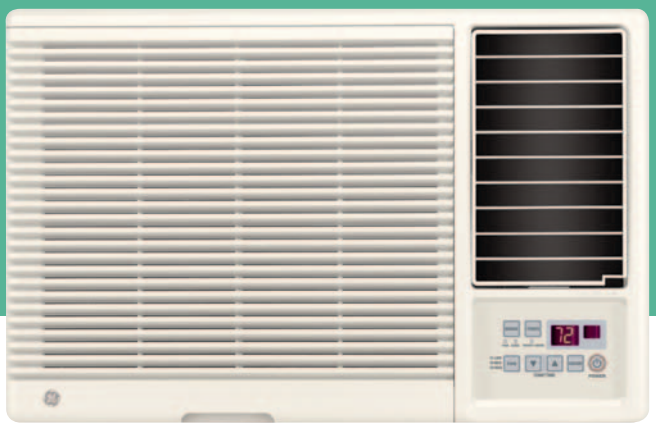

- ENERGY STAR®-qualified
- 3 Cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 24-Hour timer
- Auto circulaire™
- Energy saver feature
- Ez mount window kit
- Power interruption restart

AGM24DH
- 23,800/23,300 BTU, 9.4/9.4 EER, 230/208 Volts (Top discharge unit)

AGM18DH
- 17,800/17,300 BTU, 10.7/10.7 EER, 230/208 Volts

AGM14AH
- 13,800 BTU, 10.8 EER, 115 Volts

AGM12AH
- 12,000 BTU, 10.8 EER, 115 Volts

AGM10AH
- 10,000 BTU, 10.8 EER, 115 Volts

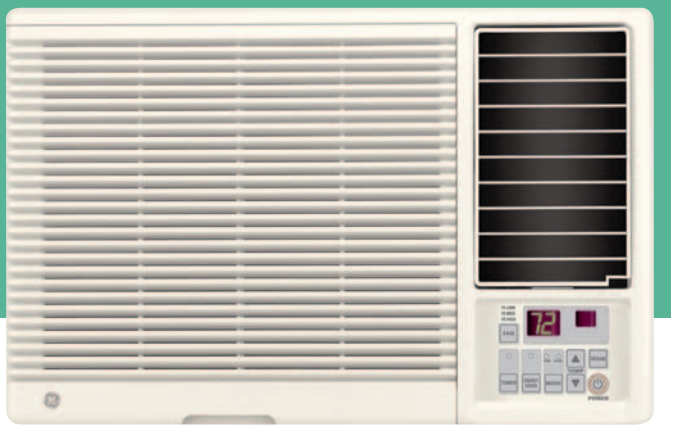

- ENERGY STAR-qualified
- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 24-hour timer
- Auto Circulaire
- Energy Saver feature
- EZ Mount window kit
- Power interruption restart

AGM08LH
- 8,000 BTU, 10.8 EER, 115 Volts

AGM06LH
- 5,950 BTU, 10.7 EER, 115 Volts

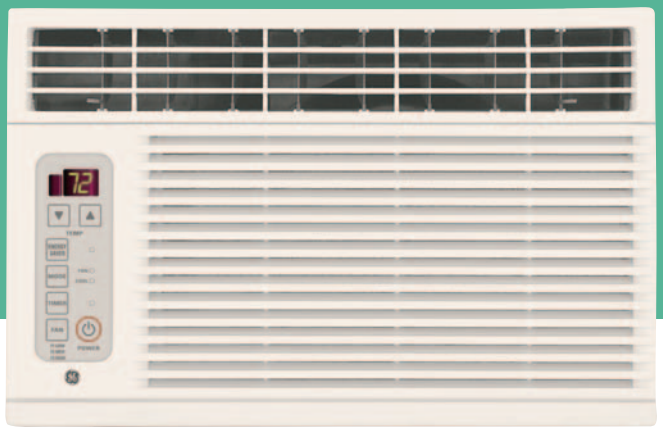

- ENERGY STAR-qualified
- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 24-hour timer
- Energy Saver feature
- EZ Mount window kit
- Power interruption restart

AGM05LH
- 5,200 BTU, 10.7 EER, 115 Volts

Complete features and specifications on page 70.

GE Electronic Room Air Conditioners

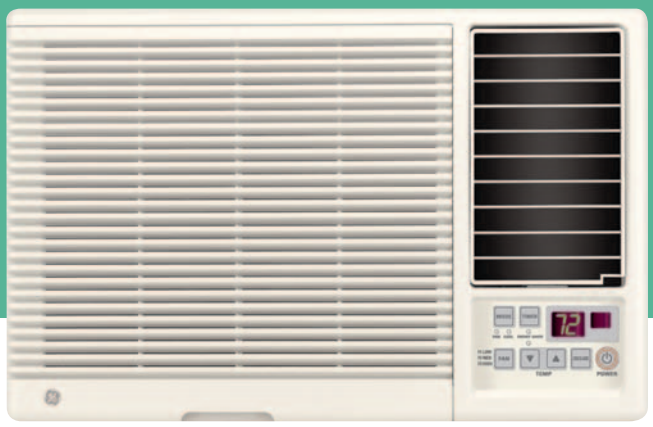

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Slide-out chassis
- 12-hour timer
- Auto Circulaire
- Energy saver feature
- EZ Mount window kit
- Power interruption restart

AGQ24DH
- 23,800/23,300 BTU, 8.5/8.5 EER, 230/208 Volts

AGQ18DH
- 18,000/17,500 BTU, 9.7/9.7 EER, 230/208 Volts

AGQ14AH
- 13,800 BTU, 10.0 EER, 115 Volts

AGQ12AH
- 12,000 BTU, 9.8 EER, 115 Volts (This model does not include Auto Circulaire or Energy saver feature)

AGQ12DH
- 12,000/11,500 BTU, 9.8/9.8 EER, 230/208 Volts (This model does not include Auto Circulaire or Energy saver feature)

AGQ10AH
- 10,000 BTU, 9.8 EER, 115 Volts (This model does not include Auto Circulaire or Energy saver feature)

AGQ08AH
- 8,000 BTU, 9.8 EER, 115 Volts (This model does not include Auto Circulaire or Energy saver feature)

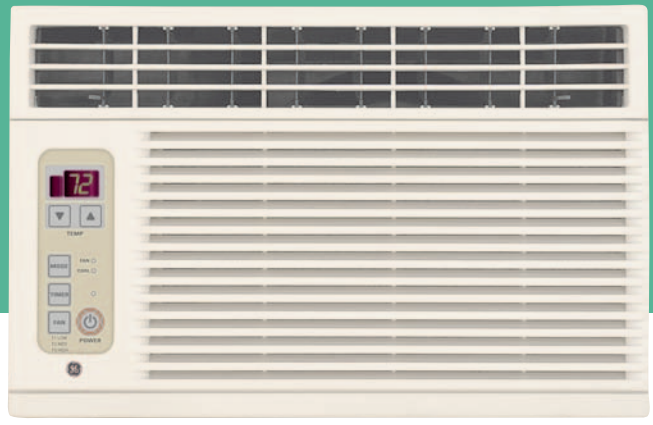

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 12-hour timer
- EZ Mount window kit
- Power interruption restart

AGQ06LH
- 6,000 BTU, 9.7 EER, 115 Volts

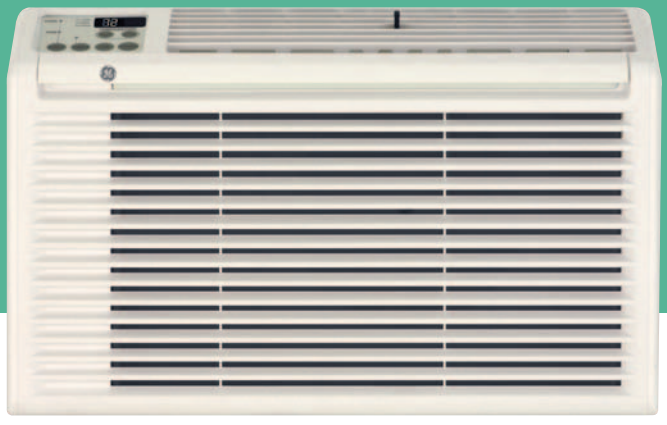

- 3 cool/3 fan speeds
- Electronic thermostat with remote
- Fixed chassis
- 12-hour timer
- EZ Mount window kit
- Power interruption restart

AGQ05LH
- 5,150 BTU, 9.7 EER, 115 Volts

Complete features and specifications on page 70.

GE® Air Conditioning

GE ENERGY STAR®-Qualified Mechanical Room Air Conditioners

- 3 cool/2 fan speeds
- 8-position thermostat
- Slide-out chassis
- Auto Circulaire™
- Energy Saver feature
- EZ Mount window kit

AGV24DH
- 23,800/23,300 BTU, 8.5/8.5 EER, 230/208 Volts

AGV18DH
- 18,000/17,500 BTU, 9.7/9.7 EER, 230/208 Volts

AGV14AH
- 13,800 BTU, 10.0 EER, 115 Volts

- 3 cool/2 fan speeds
- 8-position thermostat
- Slide-out chassis
- EZ Mount window kit

AGV12AH
- 12,000 BTU, 9.8 EER, 115 Volts

AGV10AH
- 10,000 BTU, 9.8 EER, 115 Volts

AGV08AH
- 8,000 BTU, 9.8 EER, 115 Volts

Complete features and specifications on page 71.

GE Mechanical Room Air Conditioners

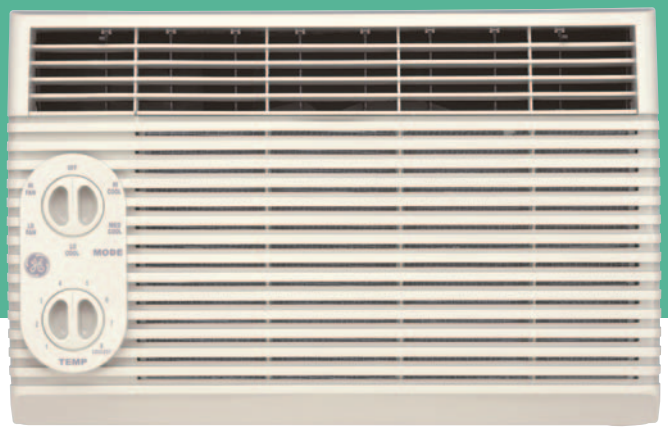

- 3 cool/2 fan speeds
- 8-position thermostat
- Fixed chassis
- EZ Mount window kit

AGV06LH
- 6,000 BTU, 9.7 EER, 115 Volts

- 2 cool/2 fan speeds
- Adjustable thermostat
- Fixed chassis
- EZ Mount window kit

AGV05LH
- 5,150 BTU, 9.7 EER, 115 Volts

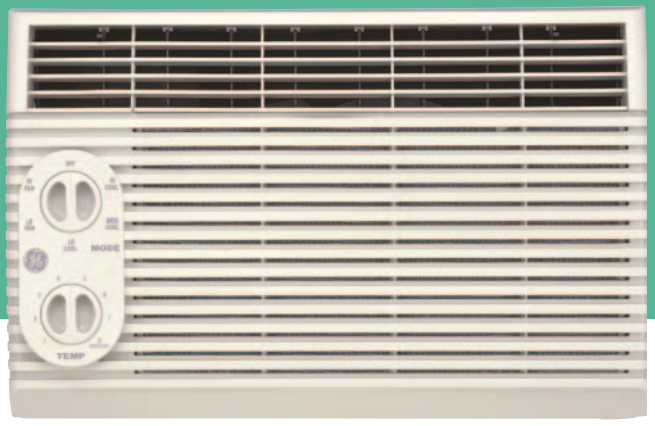

- ENERGY STAR®-qualified
- 3 cool/2 fan speeds
- 8-position thermostat
- Fixed chassis
- EZ Mount window kit

AGF05LH
- 5,200 BTU, 10.7 EER, 115 Volts

Complete features and specifications on page 71.

GE® Air Conditioning

GE Slide-Aire

- 10-position thermostat
- Vertical slider kit panel
- Multiple cooling and fan speeds
- Four-way adjustable air discharge

AGX10AH
- 10,000 BTU, 9.5 EER, 115 Volts

AGX08FH
- 8,000 BTU, 9.5 EER, 115 Volts

GE Heat/Cool Series

- Multiple cooling/heating speeds
- Vent/Exhaust
- Adjustable thermostat
- Auto Circulaire™
- Four-way adjustable air discharge
- Easy access filter

AGE21DH
- 21,000/20,500 BTU, 8.5/8.5 EER, 11,600/9,400 BTUH Heat, 230/208 Volts

AGE18DH
- 18,000/17,500 BTU, 9.7/9.7 EER, 11,600/9,400 BTUH Heat, 230/208 Volts

AGE14DH
- 14,000/13,500 BTU, 9.7/9.7 EER, 11,600/9,400 BTUH Heat, 230/208 Volts

AGE12DH
- 12,000/11,500 BTU, 9.8/9.8 EER, 11,200/9,200 BTUH Heat, 230/208 Volts (This model does not include Auto Circulaire)

AGE07AH
- 6,900 BTU, 9.7 EER, 3,850 BTUH Heat, 115 Volts (This model does not include Auto Circulaire)

Complete features and specifications on page 72.

GE Dehumidifiers

- ENERGY STAR®-qualified
- Automatic humidistat control
- Electronic controls
- Automatic shut-off system with bucket full indicator
- Easy roll casters
- External drain connector
- Automatic defrost control

AHG50LH
- 50 pints per day

AHG40LH
- 40 pints per day

AHG30LH
- 30 pints per day
  (Not an ENERGY STAR model)

Control panel

GE Portable

- Contemporary design
- Electronic controls
- Digital temperature readout
- 3 cool/3 fan speeds
- 24-hour timer
- Auto Circulaire
- Easy roll casters
- Adjustable exhaust hose
- Self evaporating condensate removal

APH10AA
- 10,000 BTU, 120 Volts

Control panel

GE Low Profile Air Conditioner

Control panel

- Contemporary design
- Electronic controls
- Digital temperature readout
- 3 cool/3 fan speeds
- 12-hour timer

AGP07LH
- 6,650 BTU, 9.8 EER, 115 Volts

Complete features and specifications on page 72.

GE® Built-In **Air Conditioning**

GE Standard-Mount Electronic Cool Only

- ENERGY STAR®-qualified
- Electronic control with remote
- Electronic digital thermostat
- Four-way air direction
- Up-front, washable air filter
- 3 cool/3 fan speeds
- Power interruption restart

AJCQ06LCB
- 6,000 BTU, 10.0 EER, 115 Volts

AJCQ08ACB
- 8,000 BTU, 9.5 EER, 115 Volts

AJCQ10ACB
- 9,900 BTU, 9.5 EER, 115 Volts

AJCQ10DCB
- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCQ12DCB
- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts

GE Standard-Mount Cool Only

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds

AJCS06LCB
- 6,000 BTU, 10.0 EER, 115 Volts

AJCS08ACB
- 8,000 BTU, 9.5 EER, 115 Volts

AJCS10ACB
- 9,900 BTU, 9.5 EER, 115 Volts

AJCS09DCB
- 8,900/8,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS10DCB
- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS12DCB
- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts

GE High-Mount Cool Only

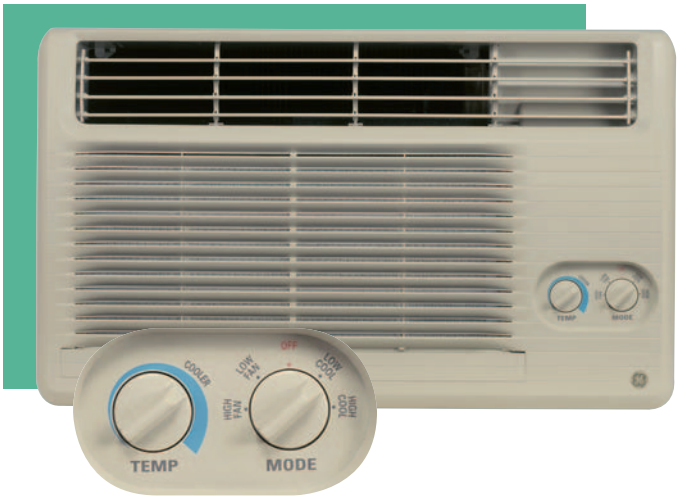

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds

AJCH08ACB
- 8,000 BTU, 9.5 EER, 115 Volts

AJCH10ACB
- 9,900 BTU, 9.5 EER, 115 Volts

AJCH10DCB
- 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCH12DCB
- 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts

Complete features and specifications on pages 73.

GE Standard-Mount Heat/Cool

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJES06LSB
- 6,000 BTU cool, 4,100 BTU heat, 10.0 EER rating, 115 Volts

AJES08ASB
- 8,000 BTU cool, 4,100 BTU heat, 9.5 EER, 115 Volts

AJES10DSB
- 9,900/9,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES09DCB
- 8,900/8,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES10DCB
- 9,900/9,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJES12DCB
- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

GE High-Mount Heat/Cool

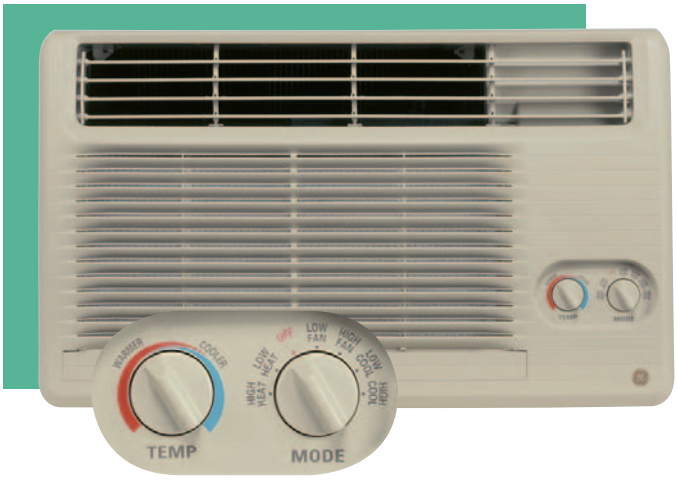

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJEH12DCB
- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

GE Heat Pump

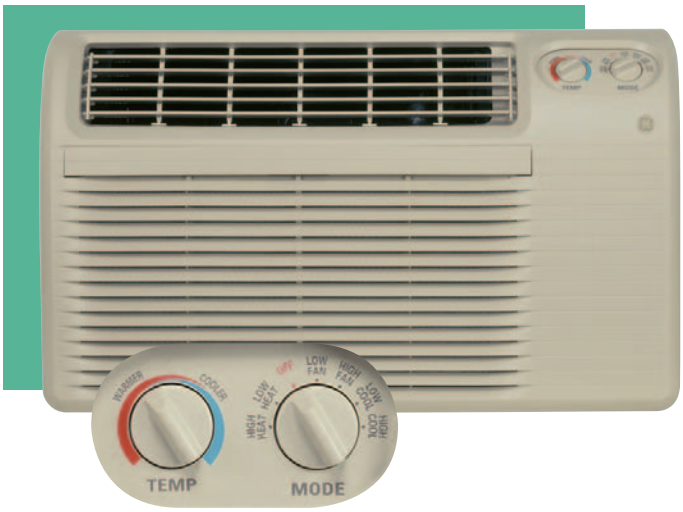

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

AJHS08ASB
- 8,000 BTU cool, 7,700 BTU pump, 4,100 BTU heat, 9.5 EER, 115 Volts

AJHS08DCB
- 8,000/7,800 BTU cool, 7,700/7,500 BTU pump, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

AJHS10DCB
- 9,900/9,700 BTU cool, 9,700/9,500 BTU pump, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

Complete features and specifications on pages 73.

Room Air Conditioners **Specifications (Preliminary)**

GE® ENERGY STAR®-Qualified Electronic	**Deluxe 230 Volt**		**Deluxe 115 Volt**					
	AGM24DH	**AGM18DH**	**AGM14AH**	**AGM12AH**	**AGM10AH**	**AGM08LH**	**AGM06LH**	**AGM05LH**
Features								
ENERGY STAR®-qualified	●	●	●	●	●	●	●	●
BTUH	23,800/23,300	17,800/17,300	13,800	12,000	10,000	8,000	5,950	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	9.4/9.4	10.7/10.7	10.8	10.8	10.8	10.8	10.7	10.7
Amps	TBD	7.4/7.9	12.0	10.2	8.5	6.8	5.0	4.4
Watts	TBD	1,660/1,620	1,280	1,110	920	740	550	480
Plug Type	Perpendicular	Tandem/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle
Energy Saver Feature	●	●	●	●	●	●	●	●
Dehumidification (pints/hr.)	TBD	4.6	4.6	3.3	3.3	2.3	1.8	1.4
Auto Circulaire™	●	●	●	●	●	●	●	
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown) (Indoor)	TBD	445	350	300	270	240	210	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	16	14	14	13
Window Opening Width (in inches) min.	29	29	27	27	27	22	22	22
max.	41	41	39	39	39	36	36	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	TBD	16-27/32	16-27/32	15	15	13-7/8	13-7/8	12-9/32
Width (in inches) B	TBD	26	26	23-5/8	23-5/8	18-9/16	18-9/16	18-9/16
Depth (in inches) C	TBD	24-15/16	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	13-27/32
Depth to louvers (in inches) D	TBD	10-5/16	10-5/16	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4
Net Weight (lbs.)	TBD	124	124	80	79	62	57	46
Approx. Shipping Weight (lbs.)	TBD	134	134	89	87	68	63	50

GE Electronic	**230 Volt**			**115 Volt**					
	AGQ24DH	**AGQ18DH**	**AGQ12DH**	**AGQ14AH**	**AGQ12AH**	**AGQ10AH**	**AGQ08AH**	**AGQ06LH**	**AGQ05LH**
Features									
BTUH	23,800/23,300	18,000/17,500	12,000/11,500	13,800	12,000	10,000	8,000	6,000	5,150
Voltage	230/208	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	9.8/9.8	10.0	9.8	9.8	9.8	9.7	9.7
Amps	12.2/11.0	8.2/8.9	5.5/5.8	12.0	11.0	9.2	7.6	5.8	4.9
Watts	2,480/2,530	1,850/1,800	1,220/1,170	1,380	1,220	1,020	820	620	530
Plug Type	Perpendicular	Tandem	Tandem	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/Right Angle	Parallel/RightAngle
Energy Saver Feature	●	●		●					
Dehumidification (pints/hr.)	7.5	5.5	3.3	4.6	3.3	3.0	2.3	1.5	1.5
Auto Circulaire™	●	●		●					
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown) (Indoor)	560	440	280	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust		
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	16	14	14	13	12
Window Opening Width (in inches) min.	29	29	27	27	27	22	22	22	21
max.	41	41	39	39	39	36	36	36	35
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr..	Full 5-Yr.	Full 5-Yr.
Case Dimensions									
Height (in inches) A	16-27/32	16-27/32	15	15	15	13-7/8	13-7/8	12-9/32	11-1/8
Width (in inches) B	26	26	23-5/8	23-5/8	23-5/8	18-7/16	18-7/16	18-9/16	17-5/16
Depth (in inches) C	28-21/32	24-15/16	20-9/32	20-9/32	20-9/32	19-5/32	19-5/32	13-27/32	12-3/8
Depth to louvers (in inches) D	10-5/16	10-5/16	8-5/8	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4	4-1/8
Net Weight (lbs.)	146	117	80	87	79	69	60	46	40
Approx. Shipping Weight (lbs.)	176	127	89	96	87	75	66	50	44

See page 75 for warranty information.

Room Air Conditioners **Specifications (Preliminary)**

	230 Volt		Deluxe 115 Volt	115 Volt					
GE Mechanical	**AGV24DH**	**AGV18DH**	**AGF05LH**	**AGV14AH**	**AGV12AH**	**AGV10AH**	**AGV08AH**	**AGV06LH**	**AGV05LH**
Features									
ENERGY STAR®-qualified			●						
BTUH	23,800/23,300	18,000/17,500	5,200	13,800	12,000	10,000	8,000	6,000	5,150
Voltage	230/208	230/208	115	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.7	10.0	9.8	9.8	9.8	9.7	9.7
Amps	12.2/11.0	8.2/8.9	4.4	12.0	11.0	9.2	7.6	5.8	4.9
Watts	2,480/2,530	1,850/1,800	480	1,380	1,220	1,020	820	620	530
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●		●					
Dehumidification (pints/hr.)	7.5	5.5	1.5	4.6	3.3	3.0	2.3	1.5	1.5
Auto Circulaire™	●	●		●					
Fan Speeds (Cool/Fan Only)	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	2/2
CFM (High Shown) (Indoor)	560	440	140	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust		Exhaust	Exhaust	Exhaust	Exhaust		
Thermostat	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	Adjustable
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Fixed	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	13	16	16	14	14	13	12
Window Opening Width (in inches) min.	29	29	22	27	27	22	22	22	21
max.	41	41	36	39	39	36	36	36	35
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions									
Height (in inches) A	16-27/32	16-27/32	12-9/32	15	15	13-7/8	13-7/8	12-9/32	11-1/8
Width (in inches) B	26	26	18-9/16	23-5/8	23-5/8	18-7/16	18-7/16	18-9/16	17-5/16
Depth (in inches) C	28-21/32	24-15/16	13-27/32	22-1/2	22-1/2	19-5/32	19-5/32	13-27/32	12-3/8
Depth to louvers (in inches) D	10-5/16	10-5/16	6-1/4	8-5/8	8-5/8	8-1/4	8-1/4	6-1/4	4-1/8
Net Weight (lbs.)	146	117	46	87	79	69	60	46	40
Approx. Shipping Weight (lbs.)	158	127	50	96	87	75	66	50	44

*See written warranty for details.

Wall case dimensions

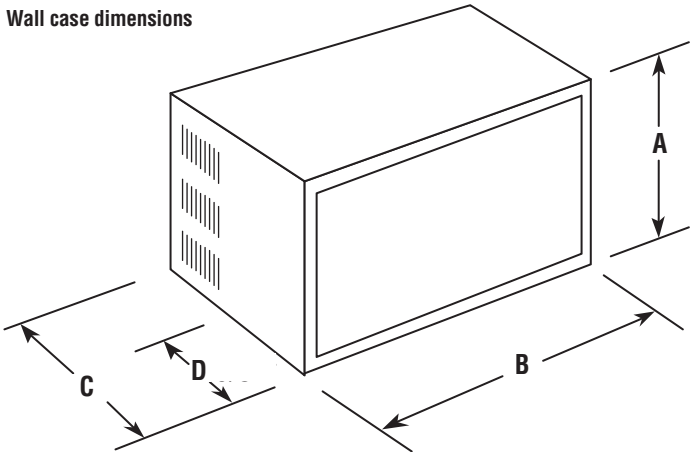

D = Distance from front of case to side louvers (excluding grille).

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.

Wall outlets

Parallel
115V.
15 Amp.

Perpendicular
230/208V.
20 Amp.

Tandem
230/208V.
15 Amp.

Large Tandem
230/208V.
30 Amp.

Wall Outlets
All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems— consult a qualified electrician.

See page 75 for warranty information.

Room Air Conditioners **Specifications (Preliminary)**

GE® Slide-Aire		AGX10AH	AGX08FH
Features			
BTUH		10,000	8,000
Voltage		115	115
E.E.R. (BTUH/Watt)		9.5	9.5
Amps		9.6	7.7
Watts		1,050	840
Plug Type		Parallel	Parallel
Dehumidification (pints/hr.)		3.5	2.3
Fan Speeds (Cool/Fan Only)		3/2	3/2
CFM (High Shown) (Indoor)		280	250
Vent/exhaust		Exhaust	Exhaust
Thermostat		10-Position	10-Position
Filter Type		Rigid frame/ Slide-out	Rigid frame/ Slide-out
Chassis		Fixed	Fixed
Window Mounting		V-Std. Mount	V-Std. Mount
	min.	21-1/2	21-1/2
Window Opening Height	max.	40-1/2	40-1/2
Window Opening Width (in inches)	min.	15-1/2	15-1/2
Warranty* (Entire Unit)		Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)		Full 5-Yr.	Full 5-Yr.
Case Dimensions			
Height (in inches)	A	20-1/2	20-1/2
Width (in inches)	B	14-1/2	14-1/2
Depth (in inches)	C	23	23
Depth to louvers (in inches)	D	9	9
Net Weight (lbs.)		76-1/4	64
Approx. Shipping Weight (lbs.)		88.5	76.3

Heat/Cool Series						
Model		**AGE21DH**	**AGE18DH**	**AGE14DH**	**AGE12DH**	**AGE07AH**
Voltage		**230/208**	**230/208**	**230/208**	**230/208**	**115**
Cooling Capacity						
BTUH-AHAM		21,000/20,500	18,000/17,500	14,000/13,500	12,000/11,500	6,900
Amps-AHAM		10.8/11.8	8.3/9.0	6.4/6.8	5.5/5.8	6.6
Watts Input		2,470/2,410	1,850/1,800	1,440/1,390	1,220/1,170	710
EER		8.5/8.5	9.7/9.7	9.7/9.7	9.8/9.89	9.7
Dehumidification (Pts./Hr.)		6.3	5.5	4.6	3.3	2.3
Electric Resistance Heating						
BTUH		11,600/9,400	11,600/9,400	11,600/9,400	11,200/9,200	3,850
Amps		16/15	16/15	16/15	15.3/14	11.0
Watts Input @ 230V		3,720/3,150	3,670/3,100	3,670/3,100	3,500/2,900	1,260
Features						
Line Cord Plug		Perp.	Perp.	Perp.	Perp.	Perp.
Recommended Circuit Protection (Time Delay)		20 Amps	20 Amps	20 Amps	20 Amps	20 Amps
Fan Speeds, Heating/Cooling		2/2	2/2	2/2	2/2	2/2
Fan Only Setting		1	1	1	1	1
Air Flow (CFM) Roomside Hi/Low		405	425	434	300	205
Air Exchange Exhaust		●	●	●	●	●
Rotary Compressor		●	●	●	●	●
Slide-Out Chassis		●	●	●	●	●
Window Installation Kit		EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Approximate Net Weight (Lbs.)		135	120	112	90	69
Approximate Shipping Wt. (Lbs.)		143	133	125	96	75

GE Dehumidifiers	ENERGY STAR® AHG50LH	ENERGY STAR AHG40LH	AHG30LH
Features			
Dehumidification (pints/day)	50	40	30
Dry Airflow (CFM)	125/115	125/115	140/127
Color	Cameo White	Cameo White	Cameo White
Auto Shut Off	●	●	●
Automatic Defrost	●	●	●
Water Full indicator	●	●	●
Fan speeds	2	2	2
Removable bucket	●	●	●
Bucket capacity (pints)	21	21	21
External drain connector	●	●	●
Casters - 4 movable	●	●	●
Voltage	115	115	115
Watts	600	580	480
Amps	6.0	5.4	5.8
Circuit size (Amps)	15	15	15
Plug type	Parallel	Parallel	Parallel
Case Dimensions			
Height (in inches)	20-7/8	20-7/8	20-7/8
Width (in inches)	12-5/8	12-5/8	12-5/8
Depth (in inches)	17-1/8	17-1/8	17-1/8
Shipping weight (lbs.)	43.2	40.1	52.6
Net weight (lbs.)	39.5	36.14	48.7

GE Portable Room	APH10AA
Features	
BTUH	10,000
Voltage	120
Amps	11.6
Plug Type	Parallel
Dehumidification (pints/hr.)	4.0
Timer	24-Hour
Fan Speeds (Cool/Fan Only)	3/3
Vent/exhaust	Exhaust
Thermostat	Electronic
Filter Type	Rigid frame/ Slide-out
Window Mounting	V-Std. Mount
Window Opening Height (min./max. in inches)	40-1/2
Window Opening Width (min. in inches)	28-2/5
Warranty* (Entire Unit)	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.
Case Dimensions	
Height (in inches)	33.3
Width (in inches)	17.7
Depth (in inches)	18.6
Net Weight (lbs.)	85.7
Approx. Shipping Weight (lbs.)	100.8

GE Low Profile		AGP07LH
Features		
BTUH		6,650
Voltage		115
E.E.R. (BTUH/Watt)		9.8
Amps		6.1
Watts		680
Plug Type		Parallel
Energy Saver Feature		
Dehumidification (pints/hr.)		TBD
Auto Circulaire™		
Fan Speeds (Cool/Fan Only)		3/3
CFM (High Shown) (Indoor)		212
Vent/exhaust		
Thermostat		Electronic
Filter Type		Rigid Frame/ Slide-out
Chassis		Fixed
Window Mounting		EZ Mount
Window Opening Height (min. in inches)		15-1/2
Window Opening Width (in inches)	min.	21-1/2
	max.	40-1/2
Warranty* (Entire Unit)		Full 1-Yr.
Warranty* (Sealed Ref. System)		Full 5-Yr.
Case Dimensions		
Height (in inches)	A	12
Width (in inches)	B	20-13/15
Depth (in inches)	C	18-1/32
Depth to louvers (in inches)	D	TBD
Net Weight (lbs.)		55
Approx. Shipping Weight (lbs.)		62

*See written warranty for details.

See page 75 for warranty information.

GE Built-In "J" Series	**Electronic Units—cool only**					**Mechanical Units—cool only**						**High-Mount Units—cool only**			
Models	**AJCQ06LCB**	**AJCQ08ACB**	**AJCQ10ACB**	**AJCQ10DCB**	**AJCQ12DCB**	**AJCS06LCB**	**AJCS08ACB**	**AJCS10ACB**	**AJCS09DCB**	**AJCS10DCB**	**AJCS12DCB**	**AJCH08ACB**	**AJCH10ACB**	**AJCH10DCB**	**AJCH12DCB**
ENERGY STAR®	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Voltage	115	115	115	230/208	230/208	115	115	115	230/208	230/208	230/208	115	115	230/208	230/208
Cooling Capacity															
BTUH-AHAM	6000	8000	9900	9900/9700	11600/11400	6000	8000	9900	8900/8700	9900/9700	11600/11400	8000	9900	9900/9700	11600/11400
Amps-AHAM	5.7	7.9	9.7	4.9/5.3	5.8/6.3	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	7.9	9.7	4.9/5.3	5.8/6.3
Watts Input	600	840	1040	1040/1020	1220/1200	600	840	1040	935/915	1040/1020	1220/1200	840	1040	1040/1020	1220/1200
EER	10.0	9.5	9.5	9.5/9.5	9.5/9.5	10.0	9.5	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (Pts./Hr.)	1.4	2.1	2.9	2.9	3.4	1.4	2.1	2.9	2.5	2.9	3.4	2.1	2.9	2.9	3.4
Features															
Line Cord Plug	Parallel	Parallel	Parallel	Tandem	Tandem	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Parallel	Tandem	Tandem
Recommended Circuit Protection (Time Delay)	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps
Fan Speeds	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Fan Only Setting	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Air Flow (CFM) Roomside Hi/Low	212/184	240/212	282/254	282/254	304/279	212/184	240/212	282/254	282/254	282/254	304/279	240/212	282/254	282/254	304/279
Air Exchange Exhaust	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Fan Cycle Switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Rotary Compressor	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Installation	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall
Wall Case Required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Approximate Net Weight (lbs.)	63	68	77	77	79	63	68	77	69	77	79	69	78	78	80
Approximate Shipping Wt. (lbs.)	72	77	86	86	88	72	77	86	79	86	88	78	87	87	89

GE Built-In "J" Series	**Heat/Cool Units**						**High-Mount**	**Heat Pumps**		
Model	**AJES06LSB***	**AJES08ASB***	**AJES10DSB**	**AJES09DCB**	**AJES10DCB**	**AJES12DCB**	**AJEH12DCB**	**AJHS08ASB***	**AJHS08DCB**	**AJHS10DCB**
Voltage	115	115	230/208	230/208	230/208	230/208	230/208	115	230/208	230/208
Cooling Capacity										
BTUH-AHAM	6000	8000	9900/9700	8900/8700	9900/9700	11600/11400	11600/11400	8000	8000/7800	9900/9700
Amps-AHAM	5.7	7.9	4.9/5.3	4.2/4.6	4.9/5.3	5.8/6.3	5.8/6.3	7.9	4.0/4.3	4.9/5.3
Watts Input	600	840	1040/1020	935/915	1040/1020	1220/1200	1220/1200	840	840/820	1040/1020
EER	10.0	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (Pts./Hr.)	1.4	2.1	2.9	2.5	2.9	3.4	3.4	2.1	2.1	2.9
Reverse Cycle Heating										
BTU-AHAM								7700	7700/7500	9700/9500
C.O.P. at 47°F.								3.0	3.0/3.0	3.0/3.0
Amps-AHAM								6.8	3.4/3.7	4.3/4.7
Watts Input								750	750/730	950/930
Electric Resistance Heating										
BTUH	4100	4100	11600/9500	11600/9500	11600/9500	11600/9500	11600/9500	4100	11600/9500	11600/9500
Amps	12.0	12.0	16.0	16.0	16.0	16.0	16.0	12.0	16.0	16.0
Watts Input @ 230V	1380	1380	3670/3010	3670/3010	3670/3010	3680/3020	3680/3020	1380	3660/3000	3680/3020
Features										
Line Cord Plug	Parallel	Parallel	Perp.	Perp.	Perp.	Perp.	Perp.	Parallel	Perp.	Perp.
Recommended Circuit Protection (Time Delay)	15 Amps	15 Amps	20 Amps	20 Amps	20 Amps	20 Amps	20 Amps	15 Amps	20 Amps	20 Amps
Fan Cycle Switch	●	●	●	●	●	●	●	●	●	●
Fan Speeds, Heating/Cooling	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Fan Only Setting	2	2	2	2	2	2	2	2	2	2
Air Flow (CFM) Roomside Hi/Low	212/184	240/212	282/254	282/254	282/254	304/279	304/279	237/212	237/212	304/279
Air Exchange Exhaust	●	●	●	●	●	●	●	●	●	●
Rotary Compressor	●	●	●	●	●	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●	●	●	●	●	●
Installation	Window/Wall	Window/Wall	Window/Wall	In Wall	In Wall	In Wall	In Wall	Window/Wall	In Wall	In Wall
Wall Case Required	Included	Included	Included	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	Included	RAB46/47/48	RAB46/47/48
Window Installation Kit	Std. Mount	Std. Mount	Std. Mount	Optional	Optional	Optional	Optional	Std. Mount	Optional	Optional
Approximate Net Weight (Lbs.)	82	87	96	71	78	80	81	TBD	TBD	TBD
Approximate Shipping Wt. (Lbs.)	97	102	111	80	88	90	90	TBD	TBD	TBD

All cooling with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice. *These units are not intended to be the primary source of heat.

Air conditioner tips

Air flow – Keep air filters clean. Do not block air flow areas.

Roomside view – J-models feature concealed power cord storage, this eliminates excessive cord exposure when receptacle is located close to unit.

Accessories

Other accessories are available, they include: Fedders and Whirlpool sleeve adapters. Drain kits and Chassis adapters for old Hotpoint cases.

See page 75 for warranty information.

Room Air Conditioners **Specifications**

Built-In Room Air Conditioners Wall Opening for RAB46/47/48 Cases

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.



Frame Construction



Brick Block and Brick Frame Construction



Flexible Mounting Position

Two wall cases for tenant option installation
When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.

RAB47—includes wall case, exterior grille and steel closure panels.

RAB48—includes wall case, exterior grille, steel closure panel and two layers of insulation.



Standard wall case RAB46
Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.



Parallel
115V.
15 Amp.

Tandem
230/208V.
15 Amp.

Perpendicular
230/208V.
20 Amp.

Wall outlets
All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.

Listed by Underwriters Laboratories

Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.

See page 75 for warranty information.

Warranties at a **glance**

The condensed list below is a convenient overview of the written warranties offered on various Hotpoint and GE® appliances described in this catalog. For complete warranty details on a specific appliance model, contact your nearest Hotpoint/GE appliance dealer, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*
Refrigerators (All models except GMR02BAN, GMR04AAM and GMR06AAP)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Sealed Refrig. System Compressor	Both	In-Home
Refrigerators (Models GMR02BAN, GMR04AAM, GMR06AAP)	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 4-Year (5 years total)	Limited	Compressor	Part	Carry-In**
Freezers (Upright and Chest)	1-Year	Limited	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrig. System	Both	In-Home
	1-Year/5-Year††	Full	Food Spoilage†	N/A	N/A
Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts	In-Home***
	Additional 19-Year (20 years total)	Limited	Tuf Tub™ basket	Parts	In-Home***
GE Spacemaker® Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts	In-Home***
Dryers	1-Year	Full	Entire Appliance	Both	In-Home
Ranges	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Ceramic cooktop, Pattern, Radiant elements	Parts	In-Home***
Hoods	1-Year	Full	Entire Appliance	Both	In-Home
GE Spacemaker® Over-the-Range Microwave Ovens	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home
Counter Saver Plus™ Over-the-Range Microwave Ovens	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	In-Home***
Microwave Ovens (Models JE1860 and JEM25)	1-Year	Limited	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home
Microwave Ovens (Models JE1460, JE1160 and JE740)	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	Carry-In**
Microwave Ovens (Models JES1384, JES1290 and JES1288)	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	Carry-In**
Dishwashers (Models HDA3740GSA, HDA3700GWW/BB, HDA3400GWW/CC/BB, HDA2000GWW/CC/BB)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Full	Polypropylene Tub and Door Liner	Both	In-Home
Dishwashers (Models HDA1000GWH, GSM1860JSS and GSM1800JWW/BB)	1-Year	Full	Entire Appliance	Both	In-Home
Dishwashers (Models GSC3400JWW/BB, GSC3200JWW/BB, GSM2100GWW/CC/BB)	1 Year	Full	Entire Appliance	Both	In-Home
	Additional 1-Year (2 years total)	Limited	Water Distrib. System	Parts	In-Home***
	Additional 9-Year (10 years total)	Full	PermaTuf® Tub and Door Liner	Both	In-Home
Disposers (Models GFC320F, GFC325F, GFC520F, GFC525F, GF530F, GFC535F, GFC720F, GFB760F, GFC1020F)	1-Year	Full	Entire Appliance	Both	In-Home
Disposers (Models GFC520F, GFC525F)	Additional 1-Year (2 years total)	Limited	Entire Appliance	Parts	In-Home***
Disposers (Models GFC530F, GFC535F)	Additional 2-Years (3 years total)	Limited	Entire Appliance	Parts	In-Home***
Disposers (Models GFC720F, GFB760F)	Additional 4-Years (5 years total)	Limited	Entire Appliance	Parts	In-Home***
Disposers (Model GFC1020F)	Additional 6-Years (7 years total)	Limited	Entire Appliance	Parts	In-Home***
Compactors	1-Year	Full	Entire Appliance	Both	In-Home
Room Air Conditioners (Window, Window Built-In)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrig. System	Both	In-Home
Dehumidifiers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrig. System	Both	In-Home

*See warranty for details.
**In-Home service available at additional cost.
***Does not include trip charge to home or other service costs.

†Cumulative limits: $100—14.9 cu. ft. and smaller; $150—15.0 cu. ft. and larger.
††One year on spoilage from any part failure. Five years on spoilage from sealed refrigerant system failure.

Consumer **Services**

Visit us at hotpoint.com

We're surfer-friendly!

Completely comprehensive, this site provides you with virtually everything you need to know about Hotpoint® appliances, parts, accessories and service. And, it's also surfer-friendly, so your searches won't be endless—they'll be effortless!

Industry leading support—

The GE Answer Center®
Information Service 800.626.2000.
(GEAppliances.com)

Questions? Call any time.

Before or after you buy any GE or Hotpoint appliance, ask us about the features, product comparisons, pricing and where to find it. Call us any time.
We never close.

GE Genuine Parts
800.626.2002.

Enhance, upgrade or fix it. Check out our accessories!

Accessories can make great GE or Hotpoint products even better. Replacement parts for GE, Hotpoint and most other brands, too. Fast delivery, convenient, direct.

GE Appliance Service
800.432.2737 (800.GE.CARES)
Same day or next day service.

If you ever need product service, we'll come where and when you want—at your convenience. We're the largest manufacturer-owned service organization in the appliance industry. Same or next day service in most cases.

Hotpoint has a policy of continuous improvement on its products and reserves the right to change materials and specifications without notice.

HOTPOINT®

For now. For the long run.

Pub. No. 80-H035

Appliance Park, Louisville, Kentucky 40225

PC40554
7/05