JVX5305DJ

GE® 30" ENERGY STAR® Certified Under The Cabinet Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

WB02X11537 replacement grease filter and JXCF55 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2000.

Installation Information: Before installing, consult installation instructions,packed with product, for current dimensional data.

Additional accessories:
JXS50SS 15" cabinet spacer
JXDA22 optional damper

AMP RATING	
120V	1.0

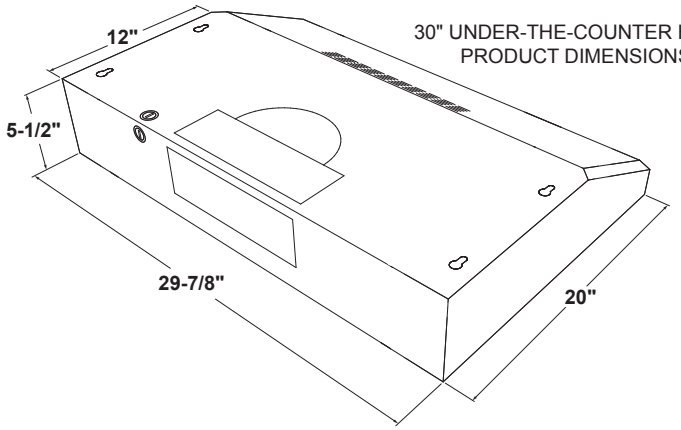

30" UNDER-THE-COUNTER HOOD
PRODUCT DIMENSIONS

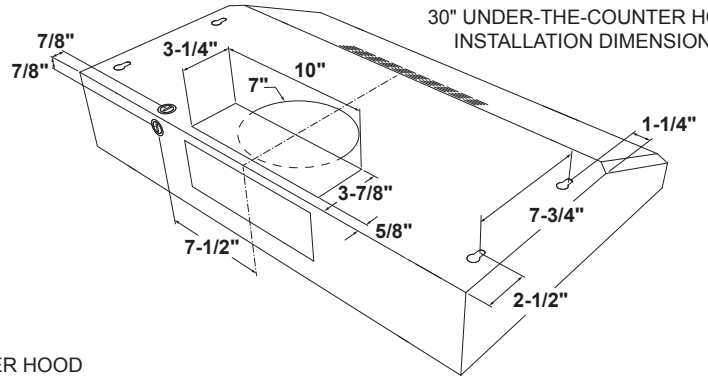

30" UNDER-THE-COUNTER HOOD
INSTALLATION DIMENSIONS

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

GE APPLIANCES

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ENERGY STAR

10-MINUTE INSTALL

Listed by Underwriters Laboratories

TESTED/CERTIFIED 2100 HVI Home Ventilating Institute

Specification Revised 11/17

JVX5305DJ

GE® 30" ENERGY STAR® Certified Under The Cabinet Hood

FEATURES AND BENEFITS

Easy installation – 10 minutes or less by one person

Two-speed, 270-CFM venting system – Removes smoke, grease, odors and moisture

Front controls - Enjoy easy access and a subtle appearance

Dual LED lighting – Choose bright light while cooking

Convertible venting options – Select recirculating or external venting

Vertical and rear exhaust – Exhausts from the top or rear of the hood

Appearance (Fully enclosed bottom) – Enjoy a sleek appearance from every angle

Dishwasher safe filter – Filters grease and is dishwasher-safe

Model JVX5305DJWW – White on white

Model JVX5305DJBB – Black on black

CFM/SONES RATINGS	
Exhaust High Speed (HS)	270/4.5
Exhaust Low Speed (LS)	100/1.5

*Not ENERGY STAR® Certified if hood is installed in a non-vented configuration.

GE APPLIANCES

Specification Revised 11/17