


# CP45I SERIES RANGE HOODS

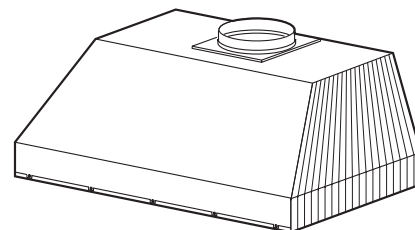

**All-in-one design includes liner, blower, filtration, controls, lighting, and damper for easy installation into custom canopy hoods. Intended for all residential applications, including commercial-style cooking surfaces.**

### FEATURES


- Cabinet mount - custom applications
- Finish: 430 Stainless Steel #4 Brushed
- Widths: 34-3/8", 46-3/8"
- Depth: 19-1/4" (both widths) or 22-1/2" (34-3/8" width only)
- 8" round duct connector with backdraft damper
- Four-setting cooktop lighting (Uses 50W, GU10 halogen lamps. Bulbs included. 2 lamps on 34-3/8" wide hood, 4 lamps on 46-3/8" wide hood.)
- Easily accessible, dishwasher safe stainless steel Evolution™ baffle filters with handles
- 4-speed electronic blower control with LinkLogic® enabled technology
- Powerful, centrifugal blower with high-efficiency motor produces 600 CFM
- Quiet operation
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Compatible with the ARP8 CFM reducer kit to reduce CFM to 250-300
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- For indoor use only

### SPECIFICATIONS

MODEL NO.	VOLTS	AMPS	CFM / SONES (High Speed)	CFM / SONES (Low Speed)	DUCT
CP45I362SB	120	3.7	600 / 8.5	210 / 1.1	8" round
CP45I369SB	120	3.7	600 / 8.5	210 / 1.1	8" round
CP45I489SB	120	4.5	600 / 8.5	210 / 1.1	8" round

### OPTIONS

- Non-ducted kit (34-3/8" width only)
  - ANKCP4536
  - Charcoal filters included
- Replacement charcoal filters (34-3/8" width only)
  - AFCCP4536

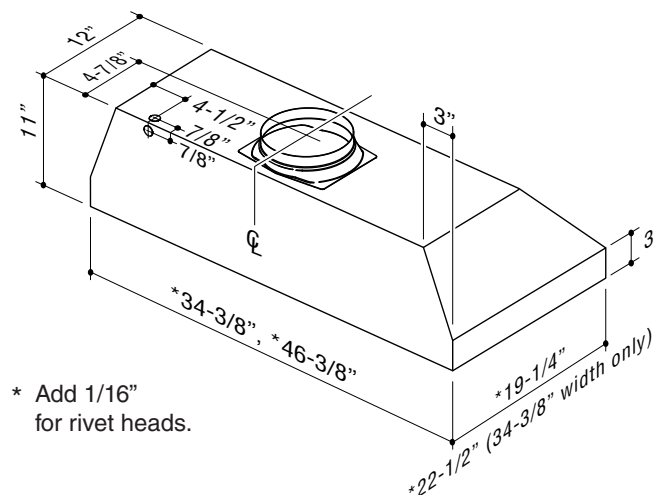

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.




BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
 BEST Mississauga, Ontario [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

To minimize the gap around the power pack, take actual width and depth measurements of power pack and add 1/16" to get D and E measurements. Cut the hole in the bottom of the cabinet according to dimensions. See chart and illustration for details.

POWER PACK		CUTOUT DIMENSIONS	
SERIES	WIDTH	D	E
CP45I	36"	19 $\frac{3}{8}$ "	34 $\frac{1}{2}$ "
	36"	22 $\frac{5}{8}$ "	34 $\frac{1}{2}$ "
	48"	19 $\frac{3}{8}$ "	46 $\frac{1}{2}$ "

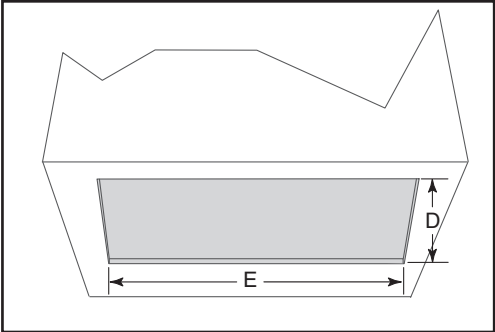

# CP45I SERIES HOOD SYSTEM

