


K41 SERIES RANGE HOODS



Class pyramidal lines create a statement of simple elegance.

FEATURES


- Italian design
- Wall mount
- Finishes: 304 Stainless Steel #4 Brushed, White, Black, Polished Brass, Brushed Copper
- Widths: 30", 36"
- Telescopic flue accommodates 8' to 9' ceilings
- 6" round duct connector/backdraft damper
- Convertible to non-ducted operation (for 8' to 9' ceilings only - requires Model No. REKITK41 sold separately)
- Halogen lighting (2 x 20 watt, MR16 - bulbs included)
- Slide controls: on-off, infinite speed
- Single centrifugal blower
- Dishwasher-safe filter features a quick-release latch and decorative cover plate
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected

OPTIONS

- Backsplash available (Model BSK1)
- Accent trim in contrasting or complementary finishes (Model No. FTK41)
- Flue extension for 10' ceiling (ducted only) (Model No. FEXTK42) (31-7/8" long)
- Recirculating filter (Model No. ROUND FILTER)
- Replacement grease filters available
- Replacement bulb (Part No. SB02300668)

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	3.13	500	8.0	6" round

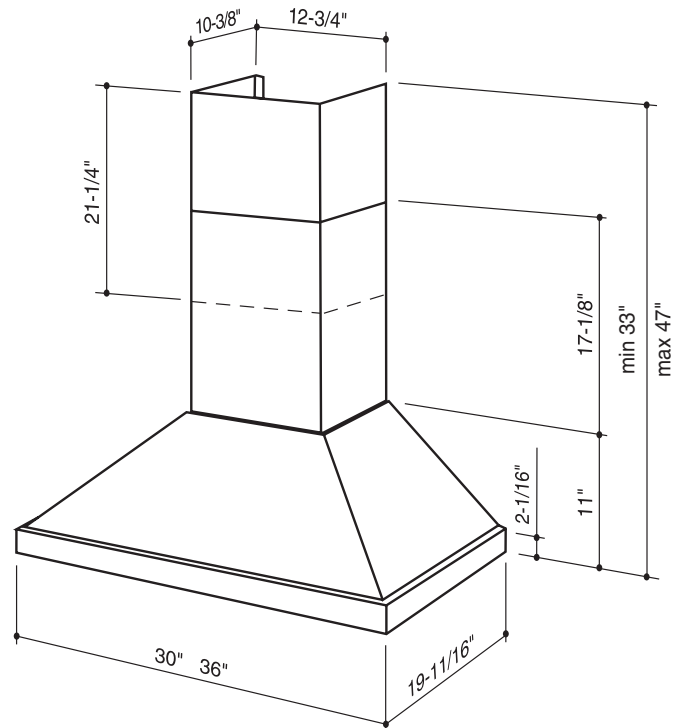

Mount range hood so bottom of hood is 24" minimum above cooking surface.




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


BEST BY BROAN P.O. BOX 140 HARTFORD, WISCONSIN 53027

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

K41 SERIES WIRING

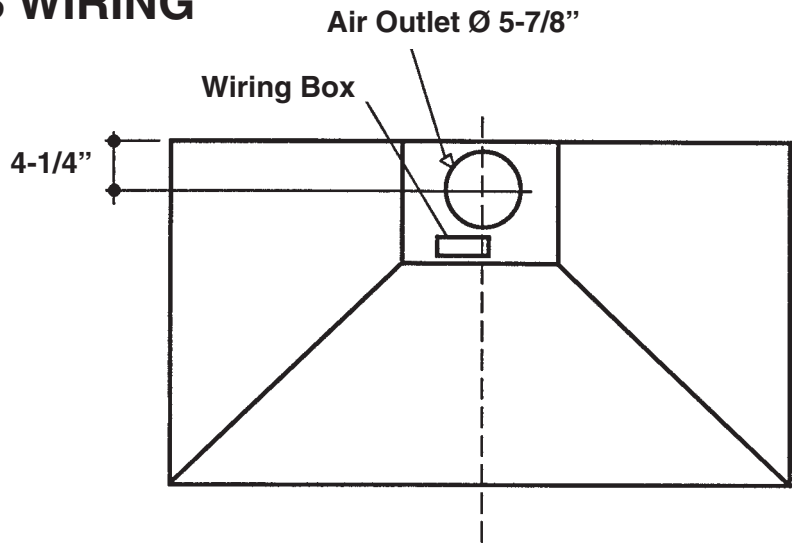

K41 SERIES MOUNTING

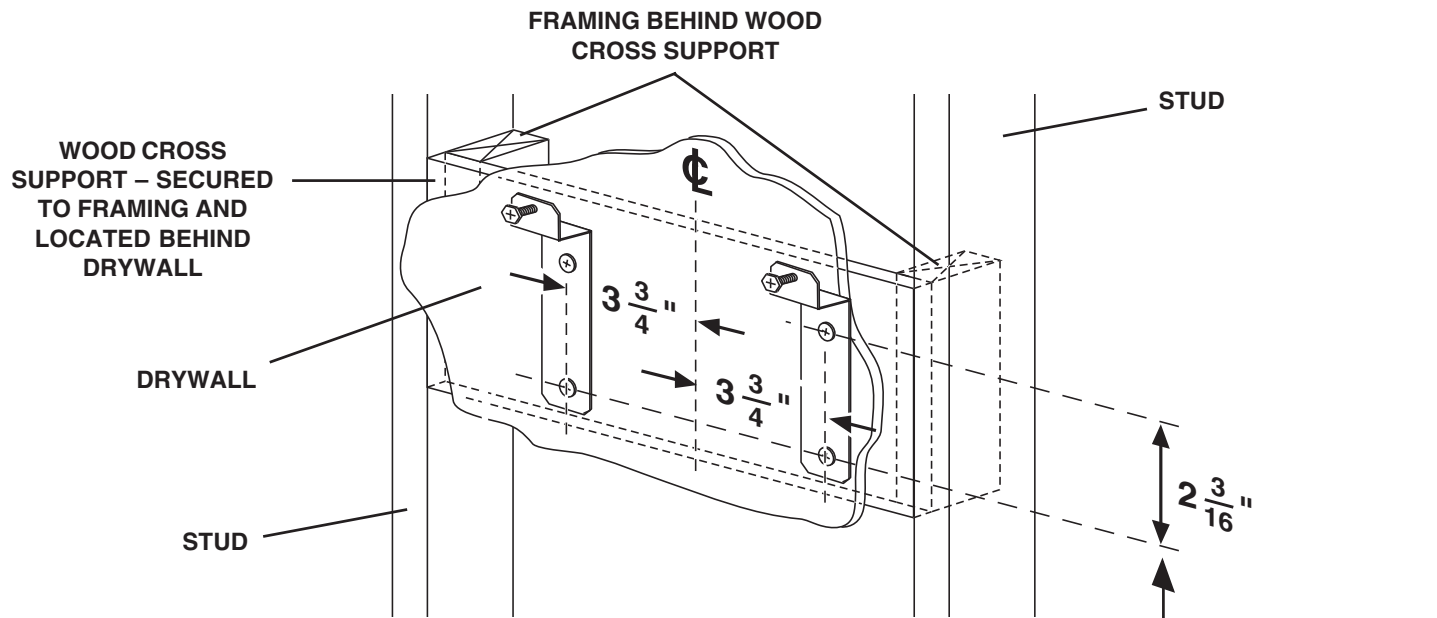

CEILING HEIGHT	DUCT METHOD	MOUNTING DISTANCE ABOVE 36" HIGH COOKTOP (SEE NOTE BELOW)						
		24"	25"	26"	27"	28"	29"	30"
		MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP						
8 FEET	DUCTED OR NONDUCTED with REKITK41	36-3/16"	37-3/16"	38-3/16"	39-3/16"			
9 FEET	DUCTED		37-3/16"	38-3/16"	39-3/16"	40-3/16"	41-3/16"	42-3/16"
	NONDUCTED with REKITK41						41-3/16"	42-3/16"
10 FEET	DUCTED WITH FEXTK42			38-3/16"	39-3/16"	40-3/16"	41-3/16"	42-3/16"

NOTE: Minimum hood distance above cooktop must not be less than 24".
A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.
Distances over 30" are at the installer and users' discretion; and if ceiling height and flue length permit.