


## PK22 RANGE HOOD

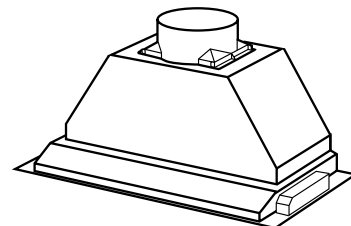


Specially designed to be installed in custom canopy hoods for use over residential commercial-style cooking surfaces.

### FEATURES

- Italian design
- Cabinet mount – custom application
- Finish: 430 Stainless Steel
- Widths: 29-13/16", 38-7/16"
- 8" round duct connector/backdraft damper
- Halogen lighting (2 bulbs included on 29-13/16" hood or 4 bulbs on 38-7/16" hood; Type GU10, MR16 shielded, 120 volt, 50 watts max.)
- Slide controls: on-off, 3-speed
- Quiet, dual centrifugal blowers with two high-efficiency motors produce 1000 CFM
- Easily accessible, dishwasher-safe aluminum/stainless steel filters
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected

### OPTIONS

- Stainless liner (Model Nos. L2936, L2942, L3848, L3854, L3860)
- Ambient light panel (Model Nos. ALP36, ALP42, ALP48, ALP54, ALP60)
- Exterior blower version (PKEX22) available, providing 600, 900, 1200, or 1500 CFM exhaust

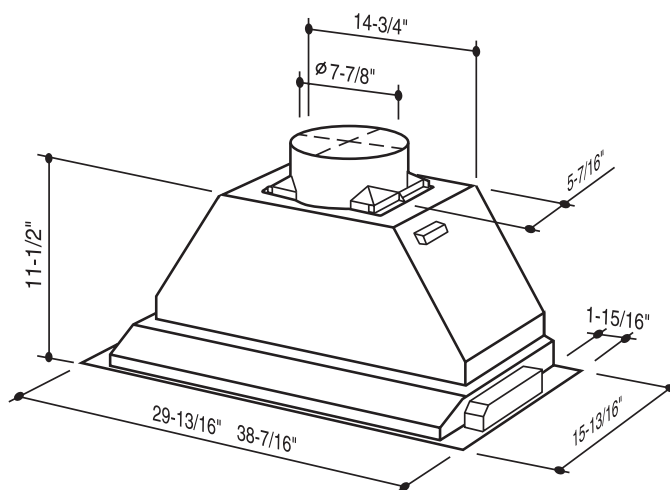

Mount range hood so bottom of hood is 24" to 30" above cooking surface.

### SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	6.23/7.06	1000	10.5	8" round



BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
BEST Mississauga, Ontario [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 877-896-1119



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

# PK22 MOUNTING

