


WC23E SERIES RANGE HOODS



Is it sculpture or functional contemporary art? Anyway you look at it, the graceful curve and stunning simplicity are sure to command a closer look.

FEATURES

- Italian design
- Wall mount
- Finish: 304 Stainless Steel #4 Brushed; brushed copper
- Widths: 35-7/16" (90 cm)
- Telescopic flue accommodates 8' to 9' ceilings
- 8-in. round duct connector/backdraft damper
- Halogen lighting (2 x 20 watt, Type JC 12V 20W G4 Base - bulbs included) with multilevels from bright cooktop illumination to a low nighttime setting
- Advanced, electronic push-button controls feature delay shutoff
- Use with exterior-mounted or attic-installed remote blowers for different levels of exhaust capacity (see specifications)
- Delay timer control automatically shuts off range hood after ten minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch and decorative cover plate
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected


OPTIONS

- Replacement grease filters available (Part No. SB08087194)
- Flue extensions for 10' ceilings (Model AEWC23 series) available in stainless steel or copper (36-3/4" long)
- Interior blower version (WC23I Series) available, providing 410 cfm exhaust
- 8-in. to 10-in. transition (Model 414)



SPECIFICATIONS


WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	wall or roof mount remote blowers	600 max.	120	0.43 (lights only) + 6.0 max. (blower only)	8-in. round at the hood. See blower specs for duct requirements.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	attic installed inline blowers	280 max.			
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			

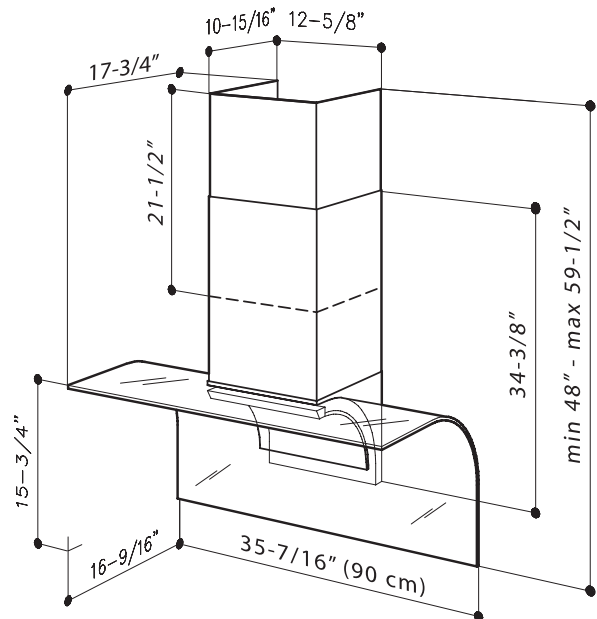


BEST BY BROAN P.O. BOX 140 HARTFORD, WISCONSIN 53027

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

WC23E SERIES WIRING

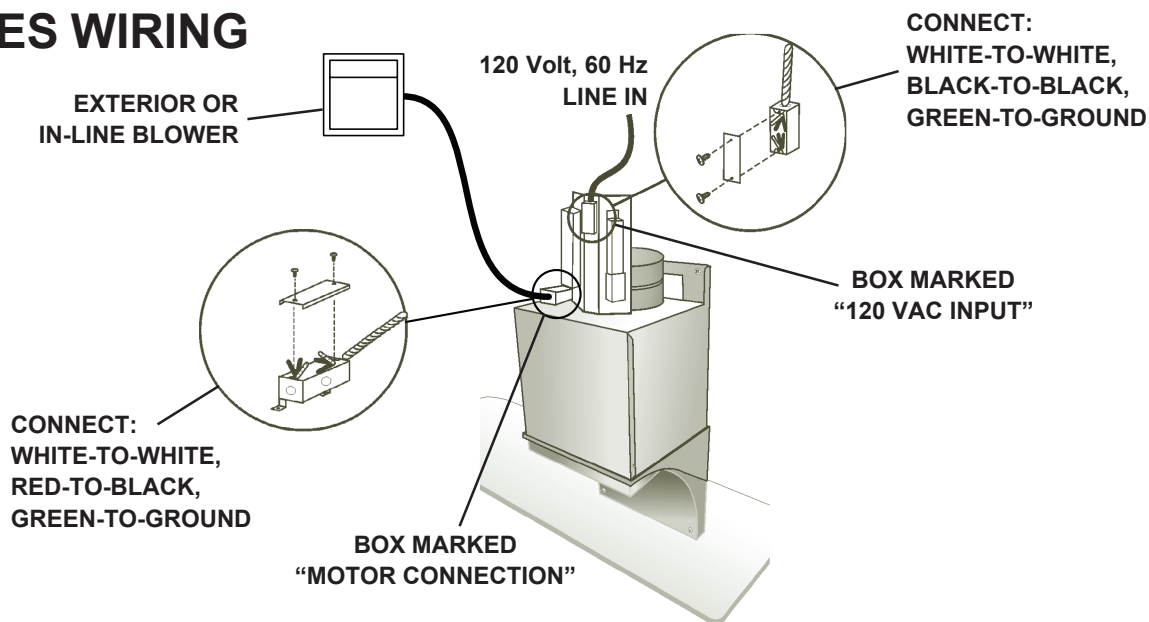

WC23E SERIES MOUNTING

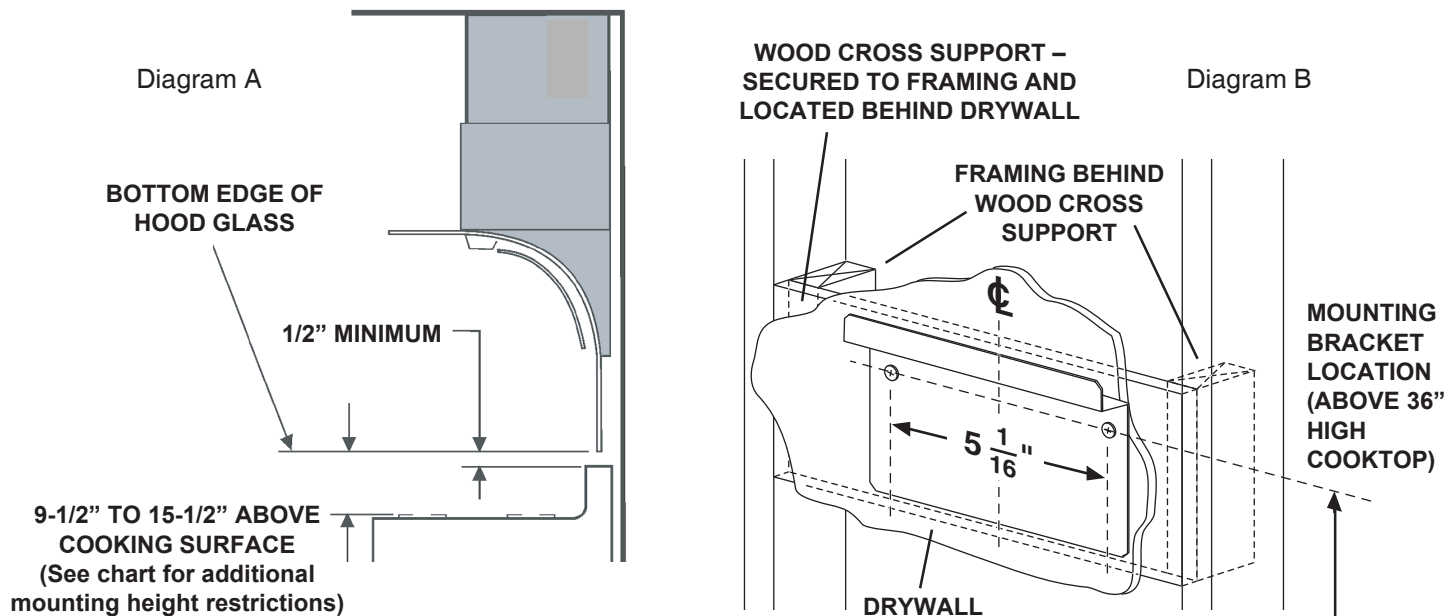

CEILING HEIGHT	HOOD DISTANCE ABOVE 36" HIGH COOKTOP (see note A)						
	9-1/2"	10-1/2"	11-1/2"	12-1/2"	13-1/2"	14-1/2"	15-1/2"
MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP							
8 FEET	38"	39"	40"	41"			
9 FEET				41"	42"	43"	44"
10 FEET (see note B)	38"	39"	40"	41"	42"	43"	44"

- A. Minimum hood distance above cooktop must not be less than 9-1/2" (see Diagram B). Bottom of glass must clear the top of the range by at least 1/2". A maximum of 15-1/2" above the cooktop is highly recommended for best capture of cooking impurities. Distances over 15-1/2" above the cooktop are at the installer's and user's discretion - providing that ceiling height and flue length permit.
- B. Requires optional 10-ft. flue extension - ducted Model AEWC23xB.

