


WT32I SERIES RANGE HOODS



Traditional Italian design chimney hood. Design includes modern features and high performance necessary in today's upscale residential kitchens.

FEATURES


- Wall mount
- Finish: 304 Stainless Steel #4 Brushed
- Widths: 30", 36", 42"
- Depth: 22"
- Duct connector with back draft damper - 8" round
- Three-setting cook top lighting. Uses two (2), 50W, GU10 halogen lamps. Three (3) lamps on 42" wide hood. Bulbs included.
- Quick release stainless steel / aluminum mesh filters are dishwasher safe.
- 4-speed electronic push button control with blue backlit selection indicators.
- Powerful, centrifugal blower with high efficiency motor produces 600 CFM
- Quiet operation
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected.
- Delay timer control automatically shuts off range hood after 5 minutes.
- Special control indicates when it's time to clean the filters.

SPECIFICATIONS

MODEL NO.	VOLTS	AMPS	CFM / SONES (High Speed)	CFM / SONES (Low Speed)	DUCT
WT32I302SB	120	4.0	600 / 9.5	200 / 1.4	8" round
WT32I362SB	120	4.0	600 / 9.5	200 / 1.4	8" round
WT32I422SB	120	4.5	600 / 9.5	200 / 1.4	8" round

OPTIONS

- Non-ducted kit - ANKWT32
 - Charcoal filters included
- Flue extension for 10-foot ceilings - AEWT32SB
- Make-up Air damper - MD6TR (6" duct), MD8TR (8" duct)
 - Relay and transformer included
- Air Flow Reducer Kit - ARP8
 - Reduces air flow to 300 CFM or less
- Non-ducted Replacement Filters - AFCWT32
 - Includes (2) filters

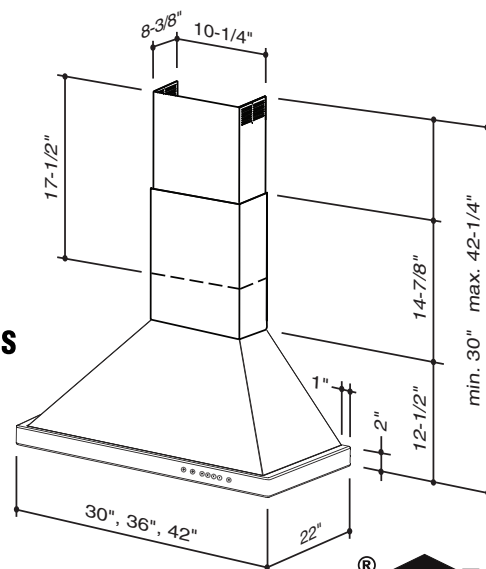


HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

WT32I SERIES WIRING

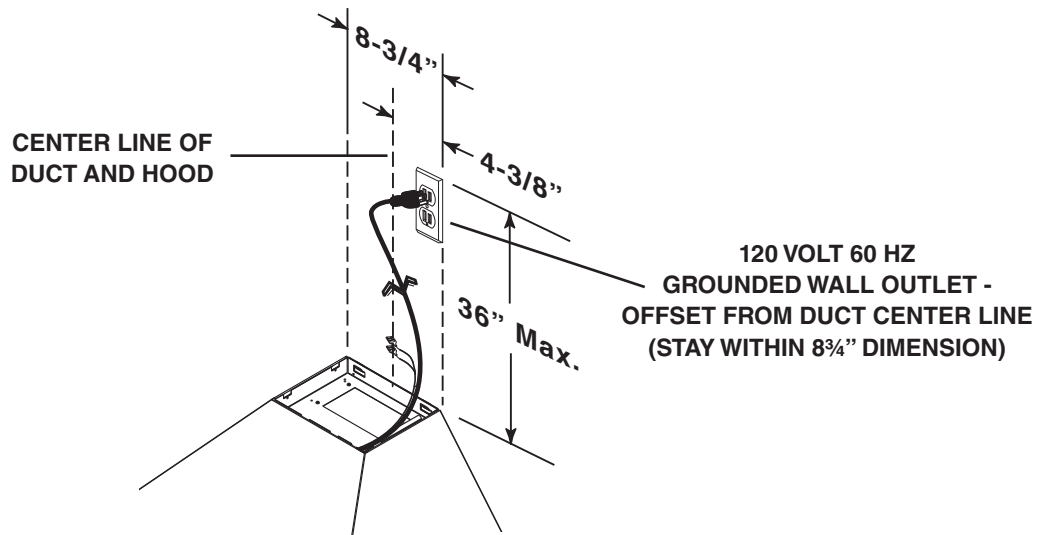

WT32I SERIES MOUNTING

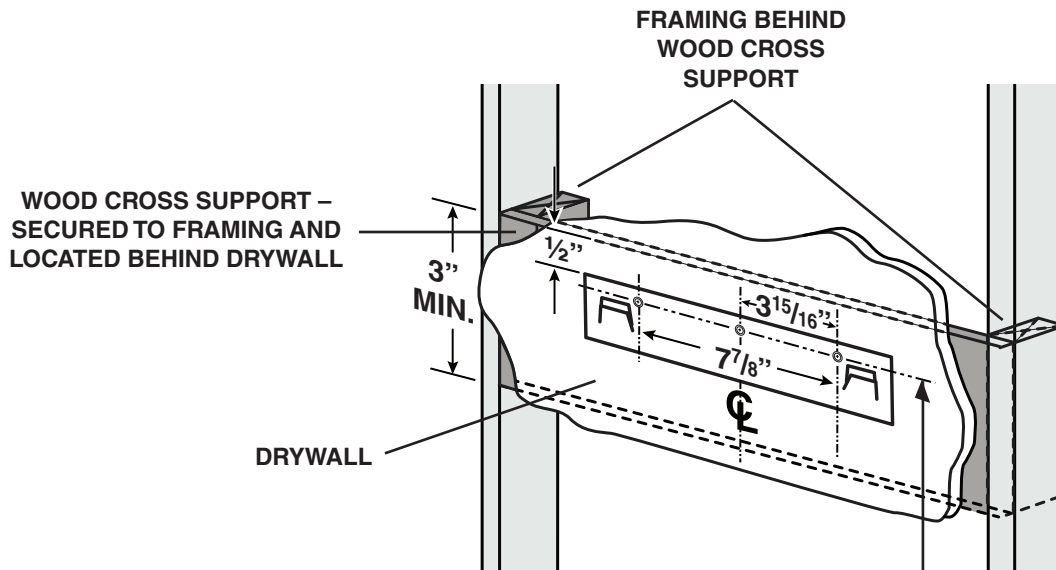

CEILING HEIGHT	DUCT METHOD	MOUNTING DISTANCE ABOVE 36" HIGH COOKTOP (SEE NOTE BELOW)						
		24"	25"	26"	27"	28"	29"	30"
		MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP						
8 FEET	DUCTED OR NON-DUCTED	36-3/4"	37-3/4"	38-3/4"	39-3/4"	40-3/4"	41-3/4"	42-3/4"
9 FEET	DUCTED	--	--	--	--	--	--	42-3/4"
	NON-DUCTED	--	--	--	--	40-3/4"	41-3/4"	42-3/4"
10 FEET	DUCTED			38-3/4"	39-3/4"	40-3/4"	41-3/4"	42-3/4"
	NON-DUCTED	36-3/4"	37-3/4"	38-3/4"	39-3/4"	40-3/4"	41-3/4"	42-3/4"

**MOUNTING BRACKET
LOCATION
(ABOVE 36" HIGH
COOKTOP)**

NOTE: Minimum hood distance above cooktop must not be less than 24".
A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.
Distances over 30" are at the installer and users' discretion; and if ceiling height and flue length permit.

WT32I SERIES RANGE HOOD SYSTEM

