


ESW 6214

24 inch handleless warming drawer  
with the low temperature cooking function - much more than a warming drawer.





- Ultimate enjoyment with Low temperature cooking
- Versatile use thanks to four operating modes
- Convenient and easy – Touch control
- Easiest handling - Push2Open
- Safe is safe - Timer function with automatic switch off

EAN: 4002515388044 / material number: 09739970

<b>Construction type</b>	
Gourmet drawer	•
<b>Design</b>	
PureLine	•
Color	Brilliant white
ContourLine	•
Control panel with sensor controls	•
Control panel with text	•
No handles	•
<b>Convenience features</b>	
Prewarming of dishware	•
Keeping food warm	•
Precise electronic temperature control from 104°F to 185°F	•
<b>Operating modes</b>	
Warm cups	•
Warm plates	•
Keeping food warm	•
Slow roast	•
<b>Control panel</b>	
Fully telescopic runners for easy loading and unloading	•
Push2open mechanism	•
Stop programming/Timer function	•
Capacity	6 place settings
<b>Cleaning convenience</b>	
Flush control panel	•
<b>Safety</b>	
Cool front	•
Safety cut-out	•
Non-slip liner	•
<b>Technical data</b>	
Appliance width in in.(mm)	23 1/2 (595)
Appliance height in in.(mm)	5 5/8 (141)
Appliance depth in in.(mm)	22 1/2 (570)
Oven cavity volume in cu. ft. (l)	0.71 (20.0)
Useable interior height in in.(mm)	3 1/4 (80)
Total connected load in kW	1
Voltage in V	120
Fuse rating in A	10
Number of phases	1
Frequency in Hz	60
Wire length in ft (m)	6 (2.0)
<b>Standard accessories</b>	
Non-slip liner	1


## ESW 6214

24 inch handleless warming drawer  
with the low temperature cooking function - much more than a warming drawer.

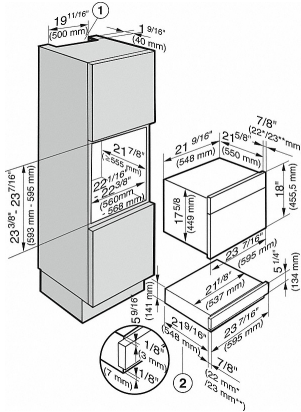


ESW 6114, ESW 6214 with DGC 6500/6600/6800  
(Installation drawing) - USA

- 1) Vent cut-out for when appliance is installed in combination with a combination steam cooker with oven
  - 2) Installation dimensions with plug power cord L = 7' 2 5/8" (2200 mm)
- \* Appliances with glass front  
\*\* Appliances with metal front
- For DGC 6805, cut-outs are required for the water supply and drain hoses (see the DGC 6805 Installation instructions).

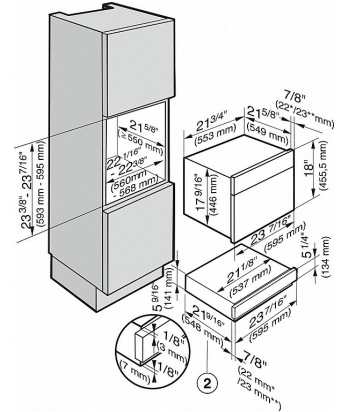


ESW 6114, ESW 6214 mit DG 6x00 / DG 6x0x (Installation drawing) - USA

- 2) Installation dimensions with plug power cord L = 7' 2 5/8" (2200 mm)
- \* Appliances with glass front  
\*\* Appliances with metal front

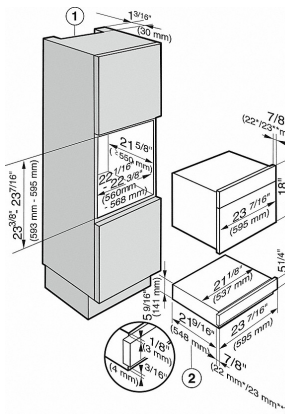

ESW 6114, ESW 6214 with H 6xxx BM, H 6xxx BP, M 61xx, M 62xx, 45 cm high (Installation drawing) - USA

- 1) Vent cut-out for when appliance is installed in combination with a self cleaning oven
  - 2) Installation dimensions with plug power cord L = 7' 2 5/8" (2200 mm)
- \* Appliances with glass front  
\*\* Appliances with metal front

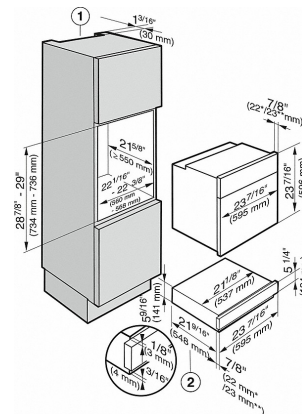

ESW 6114, ESW 6214 with H 6xxx B(P), HxxxxB(P) 60 cm high (Installation drawing) - USA

- 1) Vent cut-out for when appliance is installed in combination with a self cleaning oven
  - 2) Installation dimensions with plug power cord L = 7' 2 5/8" (2200 mm)
- \* Appliances with glass front  
\*\* Appliances with metal front