

DA 3486

30-inch slimline ventilation hood with energy-efficient LED lighting and backlit controls for easy use.




- Elegant design - slim 29 7/8 (757)Inch extractor canopy
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean - Miele CleanCover
- Suitable for every home - vented or recirculating

EAN: 4002515727041 / material number: 09884690

Construction type	
Built-in ventilation hood	•
Design	
Color	Stainless steel
Operating modes	
Recirculated mode	Convertible
OdorFree charcoal filter (order separately)	DKF13-900
Control panel	
Electronic controls	•
Light-touch controls	•
Power levels (number excl. Intensive)	3
Intensive setting	•
Programmable 'Intensive' switch-off	•
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Filter system	
Number of dishwasher-safe stainless steel grease filters	2
Lighting	
LED ClearView lighting	•
Light intensity in Lx	320
Color temperature in K	3,000
Blower	
Dual-action blower	•
AC motor	•
Air throughput with max. duct diameter in vented mode (not for external version)	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	29 7/8 (757)
Height of hood canopy in in.(mm)	1 3/8 (34)
Depth of hood canopy in in.(mm)	10 7/8 (275)
Net weight in lbs. (kg)	30 (13.5)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Installation notes	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Standard accessories	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•

DA 3486

30-inch slimline ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

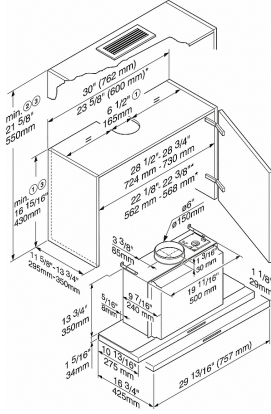

DA 3480, DA 3486 (Installation drawing) VG USA

- 1) Extraction mode: when measuring for height of the wall unit and the cut-out, account must be taken of any accessories fitted, e.g. silencer, DSM module.
 - 2) Recirculation mode: with conversion kit DUJ 151
 - 3) Installation with kneeling frame DAR 3000: Please attend differing cabinet height (see installation drawing DAR 3000)
- * can also be installed in a 600 mm wide unit.