



DOUBLE OVEN DIMENSIONS

FRONT

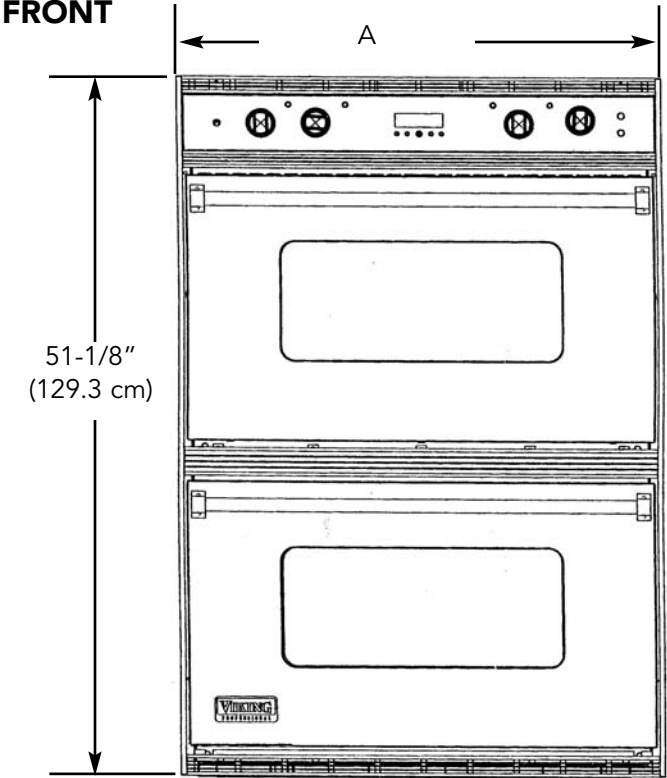


REAR


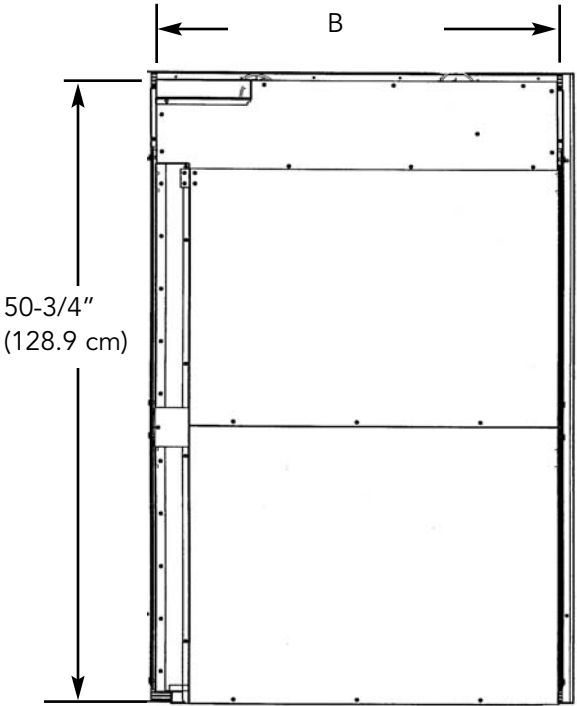


| Model | A | B |
|----------|-------------------|-------------------|
| VEDO277C | 26-1/2" (67.3 cm) | 24-3/4" (62.9 cm) |
| VEDO207C | 29-1/2" (75.0 cm) | 27-3/4" (70.5 cm) |
| VEDO265C | 35-1/4" (89.5 cm) | 33-3/4" (85.7 cm) |

SIDE

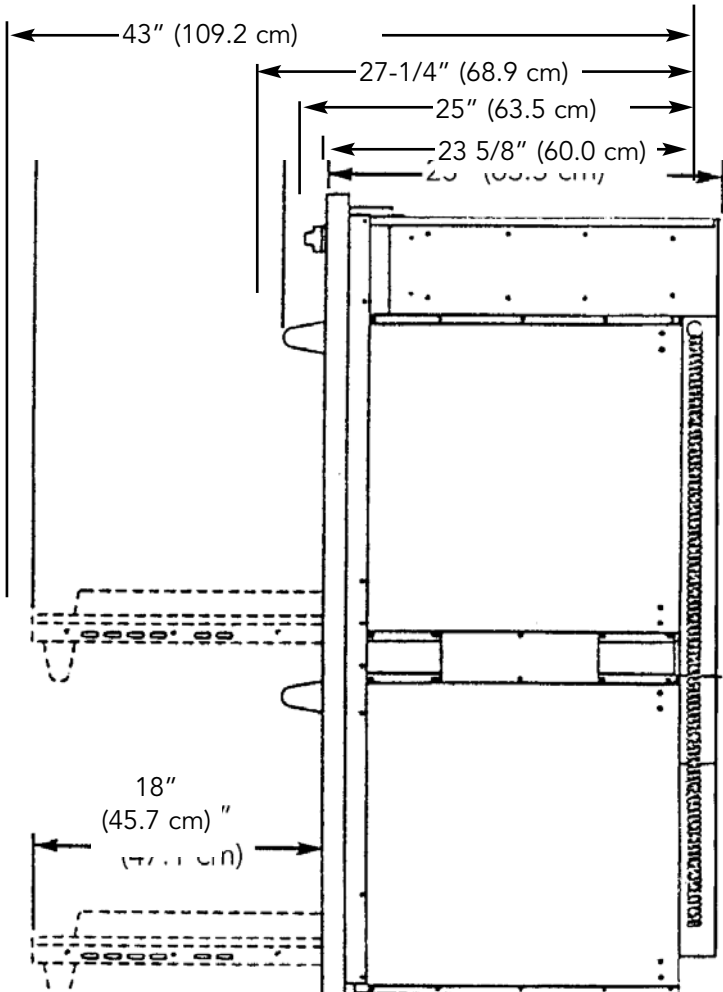

DOUBLE OVEN CUTOUT DIMENSIONS

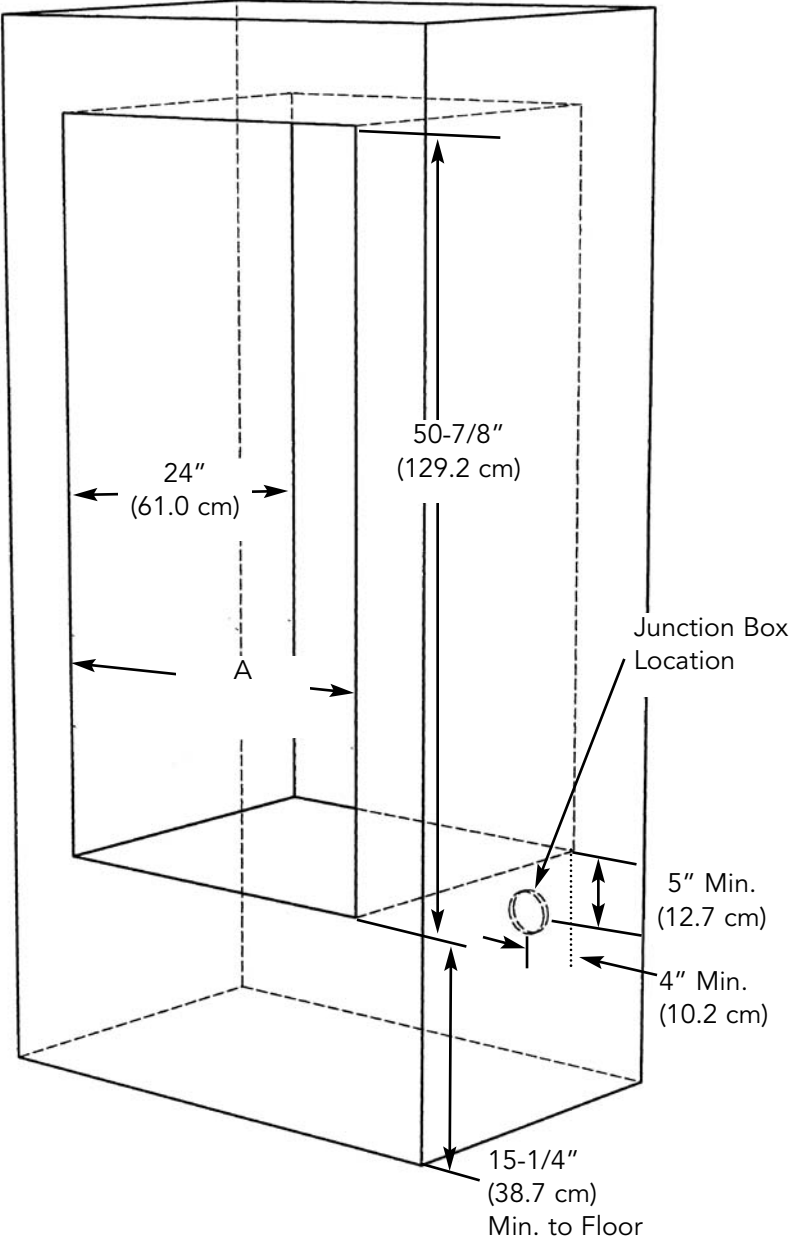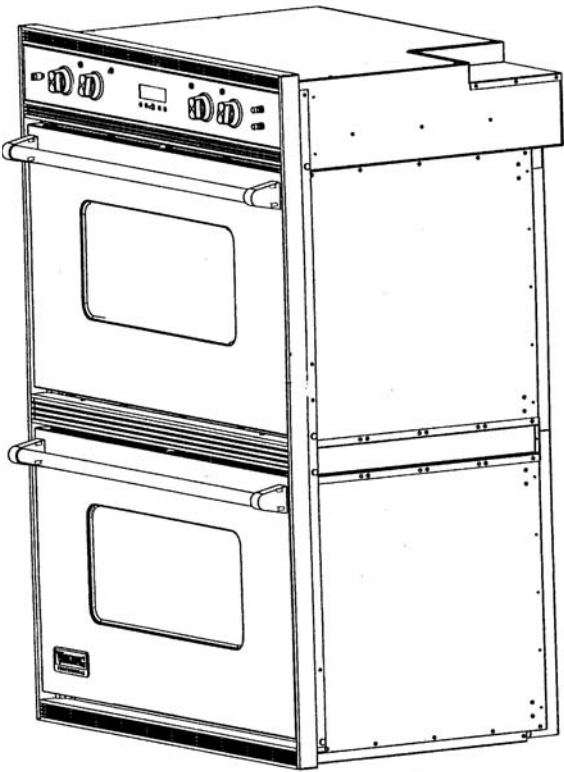

| Model | A |
|----------|---------------|
| VEDO277C | 25" (63.5 cm) |
| VEDO207C | 28" (71.1 cm) |
| VEDO265C | 34" (86.4 cm) |

SPECIFICATIONS-ELECTRIC SINGLE OVEN

| DESCRIPTION | VESO177C | VESO107C | VESO165C |
|--|---|---------------------|---------------------|
| Overall Width | 26 1/2" (67.3 cm) | 29 1/2" (75.0 cm) | 35 1/4" (89.5 cm) |
| Overall Height | 28 3/4" (73.0 cm) | | |
| Overall Depth | To edge of door - 25" (63.5 cm) To end of handle bracket - 27 1/4" (68.9 cm) With door open - 43" (109.2 cm) | | |
| Cutout Width | 25" (63.5 cm) | 28" (71.1 cm) | 34" (86.4 cm) |
| Cutout Height | 28 3/8" (72.1 cm) | | |
| Cutout Depth | 24" (61.0 cm) | | |
| Electrical Requirements | 4-wire with ground, 240-208/120 VAC/60 Hz, 30 amp electrical connection. Unit is equipped with No.10 ground wire in conduit. Should be fused separately. | | |
| Oven Interior Width | 20" (50.8 cm) | 23" (58.4 cm) | 29" (73.7 cm) |
| Oven Interior Height | 16 1/8" (41.0 cm) | | |
| Oven Interior Depth | 15 3/8" (39.1 cm) | | |
| Oven Interior Overall Size •Three racks / Six positions | 2.8 cu. ft. | 3.3 cu. ft. | 4.2 cu. ft. |
| Approximate Shipping Weight | 237 lbs. (106.7 kg) | 261 lbs. (117.5 kg) | 330 lbs. (148.6 kg) |

SPECIFICATIONS - ELECTRIC DOUBLE OVEN

| DESCRIPTION | VEDO277C | VEDO207C | VEDO265C |
|--|---|---------------------|---------------------|
| Overall Width | 26 1/2" (67.3 cm) | 29 1/2" (75.0 cm) | 35 1/4" (89.5 cm) |
| Overall Height | 51-1/8" (129.3 cm) | | |
| Overall Depth | To edge of door - 25" (63.5 cm) To end of handle bracket - 27 1/4" (68.9 cm) With door open - 43" (109.2 cm) | | |
| Cutout Width | 25" (63.5 cm) | 28" (71.1 cm) | 34" (86.4 cm) |
| Cutout Height | 50 7/8" (129.2 cm) | | |
| Cutout Depth | 24" (61.0 cm) | | |
| Electrical Requirements | Unit is equipped with No.10 ground wire in conduit. Should be fused separately 4-wire with ground, 240-208/120 VAC/60 Hz | | |
| | 40 amp connection | 40 amp connection | 50 amp connection |
| Oven Interior Width | 20" (50.8 cm) | 23" (58.4 cm) | 29" (73.7 cm) |
| Oven Interior Height | 16 1/8" (41.0 cm) | | |
| Oven Interior Depth | 15 3/8" (39.1 cm) | | |
| Oven Interior Overall Size •Three racks / Six positions | 2.8 cu ft, | 3.3 cu. ft. | 4.2 cu. ft. |
| Approximate Shipping Weight | 360 lbs. (162.0 kg) | 402 lbs. (180.9 kg) | 575 lbs. (258.8 kg) |