


SPECIFICATION SHEET

12-3/4

10-3/8"

K42 SERIES RANGE HOODS



min 33"

The classic pyramid with the performance for the serious cook or the recreational cook.

FEATURES

- Italian design
- Wall mount
- Finishes: 304 Stainless Steel #4 Brushed, Polished Brass, Polished Copper
- Widths: 36", 42", 48", 54"
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- Halogen lighting (2 x 20 watt, MR16 bulbs included)
- Slide controls: on-off, infinite speed
- Twin centrifugal blower
- Dishwasher-safe filter features a quick-release latch and decorative cover plate
- Heat Sentry[™] automatically turns blower to high speed when excess cooking heat is detected
- For indoor use only

OPTIONS

- Backsplash available (Model BSK1)
- Flue extension for 10' ceiling (Model FEXTK42) (31-7/8"
- Replacement grease filters available
- Replacement bulb (Part No. SB02300668)
- Accent trim in contrasting or complementary finishes (Model
- Exterior blower version (KEX42) available, providing 600, 900, 1200, or 1500 CFM exhaust

36" 42" 48" 54"

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

21-1/4

Mount range hood so bottom of hood is

24" minimum above cooking surface.

SPECIFICATIONS


VOLTS	AMPS	CFM	SONES	DUCT
120	6.26	1000	10.0	8" round

REFERENCE QTY. **REMARKS Project** Location **Architect Engineer** Contractor Submitted by Date


BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711 BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770

> 01A 99042841F

K42 SERIES WIRING

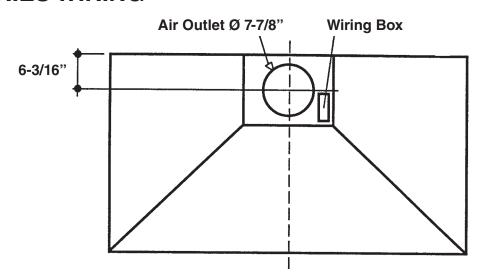

K42 SERIES MOUNTING

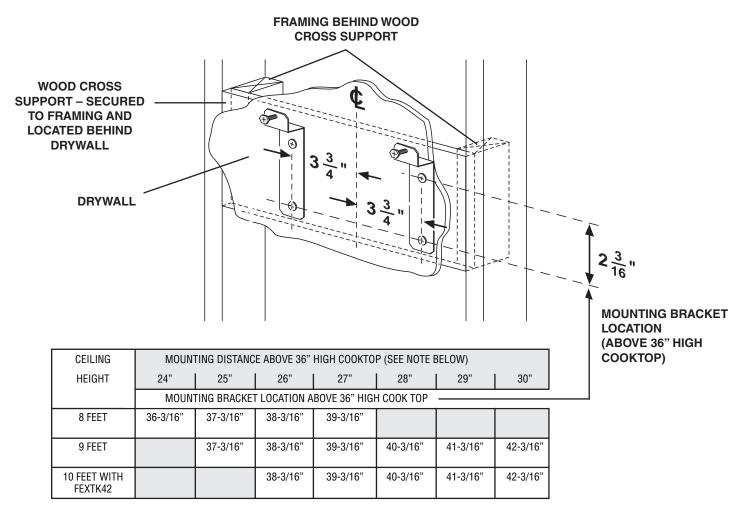

IOTE: Minimum hood distance above cooktop must not be less than 24".

A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.

Distances over 30" are at the installer and users' discretion; and if ceiling height and flue length permit.

